

# Electric Adaptive Grippers

## EAG2-48160 2-Finger

EAG is an electric 2-finger adaptive gripper that is equipped with two symmetrically articulated fingers.

### Advantages

- Slim body with one installation positions
- Grip control: force and position adjustment
- Quick open/close time with speed adjustment
- Grip feedback and part detection: gripper status can be read at the PLC/Controller and visualized on the unit via LED's
- Plug and play: mechanical and software interface for major cobot manufacturers
- Multiple communication modes: the gripper supports Modbus RTU protocol and IO mode control. Other protocols such as USB and ETHERNET can be implemented through a protocol converter.
- Grip actuation via embedded controller.
- Brake locking mechanism.



## SPECIFICATIONS

Model	Stroke	Gripping Force per Jaw	Total Gripping Force	Opening/ Closing Time	Nominal Voltage	Nominal Current	Max Current	Repeatability (Positioning)	Recommended Workpiece Weight*	Weight (fingers excluded)
<b>EAG2-48160</b>	95 mm 3.74 in	45 - 160 N 10.1 - 36 lb	90 - 320 N 20.2 - 72 lb	0.7 / 0.7 s	24 V DC ± 10%	0.8 A	1.50 A	± 0.03 mm ± 0.001 in	3.00 kg 6.61 lb	1.00 kg 2.20 lb


\* Recommended workpiece weight depends on the shape of the part, the material and friction of the contact surface and the acceleration of the motion.

Communication Interface **Standard: Modbus RTU (RS485), Digital I/O**  
**Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT**

IP Protection Class **IP 54**

Noise Emission (Sound Pressure) **≤ 40 dB(A) in alle Richtungen**

Recommended operating environment **0-40 °C (32-104 °F), < 85% RH**

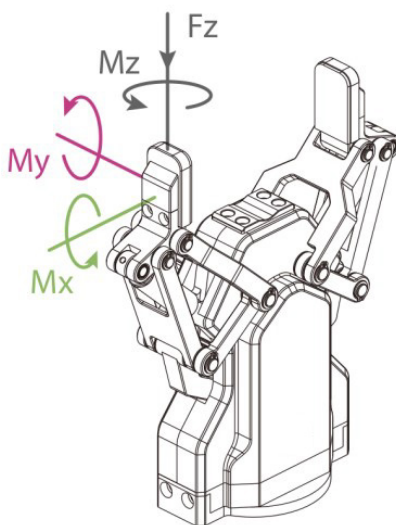

### Allowable vertical load (static)

Fz 300 N (67.44 lb)



### Allowable moment (static)

Mx 4.75 Nm (42 in-lb)


My 4.75 Nm (42 in-lb)

Mz 4.75 Nm (42 in-lb)

# PRODUCT INFORMATION

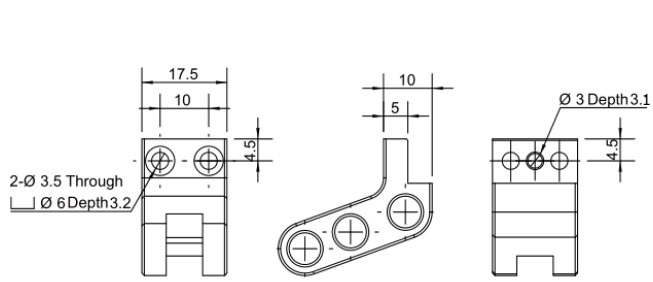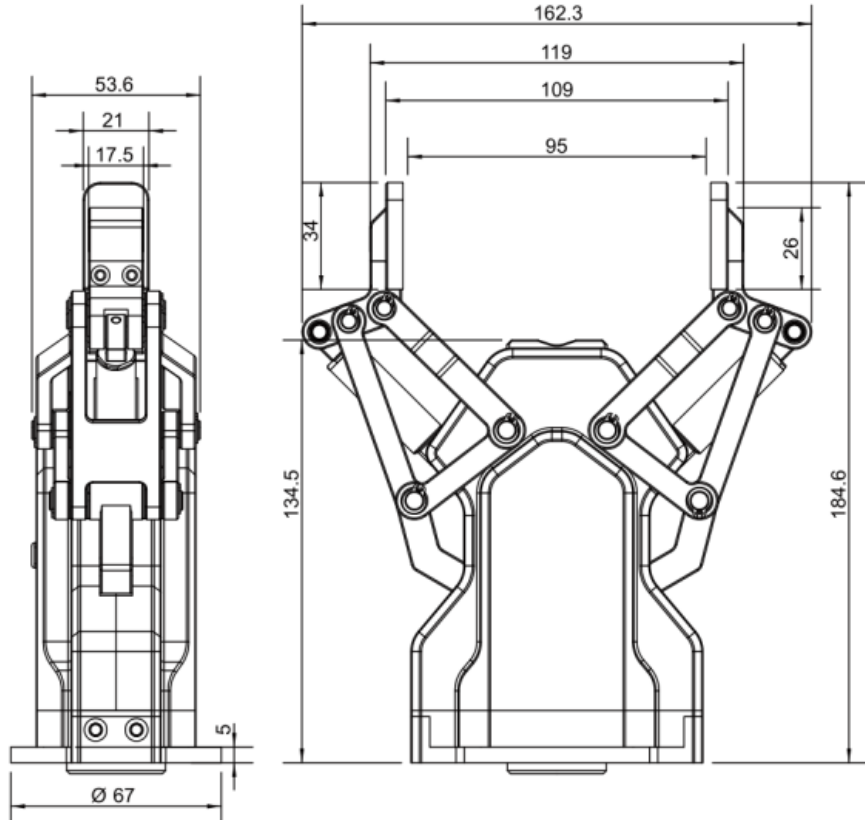

■ Custom fingers mounting size

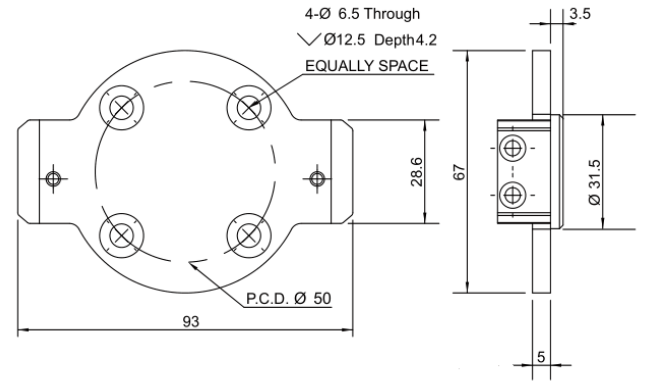

■ Conform to ISO 9409-1-50-4-M6 standard flange

**EFFECTO**  
**EFFECTO GROUP S.p.A.**  
 Via Roma, 141/143  
 28017 San Maurizio d'Opaglio (NO) - IT  
 Tel. +39 0322 96142  
 info@effecto.com

**EFFECTO**  
**USA**  
**Applied Robotics, Inc.**  
 648 Saratoga Road  
 Glenville, NY 12302 USA  
 Tel. +1 518 384 1000  
 info@effectousa.com  
[www.effecto.com](http://www.effecto.com)

**EFFECTO**  
**GmbH**  
**EFFECTO GmbH**  
 Olchingerstrasse 109  
 82194 Gröbenzell - DE  
 Tel. +49(0)8142 59397-0  
 info@effectogmbh.de