FACML

- The flexure allowed by the beam portion of the couping is capable of accommodating angular, parallel, and axial misalignment.
- Rotation character of clockwise or anti-clockwise are exactly the same.
- Free maintenance, oil-resist and anti-corrosiveness.
- Offset of angular, parallel, or axial deviation are individual allowed value, so couple reasons of axial offset appearing at same time would reduce the unit allowable value.

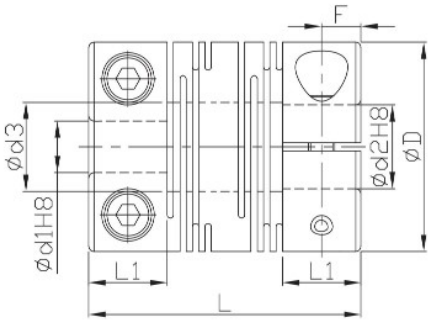



*Ød3=Ød2+0.5

Material	Surface finish	Accessories
Aluminum Alloy	Anodized	Clamping screw

Dimensions		Ød1	Ød2													L	L1	M Rough thread	A	F
Model no.	ØD		4	5	6	6.35	7	8	9.525	10	11	12	14	15	16					
FACML	12	4	●	●												18.5	5	2	4	2.5
		5		●																
	16	5		●	●											23	6.5	2.5	5	3.25
		6			●															
	20	5			●	●	●	●								26	7.5		6.5	3.75
		6			●	●	●	●												
		6.35						●												
		8						●												
	25	5			●											31	8.5	3	9	4.25
		6			●	●		●		●										
		6.35						●		●										
		8						●	●	●										
		9.525								●										
		10								●										
	32	8						●	●	●		●				41	12	4	11	6
		9.525								●		●								
		10								●	●	●	●							
		12										●	●							
	40	8						●		●						56	17	5	14	8.5
		10								●										
		12										●	●							
		14											●		●					