

LUB5

ELECTROMECHANICAL LUBRICATOR

THE EFFICIENT AND ECONOMIC SOLUTION FOR SINGLE LUBRICATION POINTS



- 3 versions available
- electromechanical drive
- 10 bar / 145 psi
- up to 24 months per filling
- refillable up to 4 times
without any follow-up costs
* within a maximum of 48 months
- oil or grease up to NLGI cl. 2
- self-filling possible
- -20 °C to +60 °C
* with suitable lubricant




GRUETZNER
A U T O M A T I C L U B R I C A T I O N

Gruetzner GmbH
Kohlenhofstr. 60
90443 Nuremberg, Germany
info@G-LUBE.com
www.G-LUBE.com

Automatic Lubrication of bearings, chains, open tooth systems and linear motions

TECHNICAL DATA

	Lub5-120	Lub5-120 PLUS	Lub5-250
Runtime per filling	1 / 3 / 6 / 12 / 24 months		
Volume	120 ml	120 ml	250 ml
Discharges	max. 5 (=600 ml)	max. 5 (=600 ml)	max. 5 (=1250 ml)
Diameter x height	127 x 70 mm	182 x 70 mm	243 x 70 mm
Fixing thread	External thread R1/4"		
Filling	empty / standard filling / special filling		
Battery capacity	Standard	triple suited for high counterpressure and low temperatures	Standard

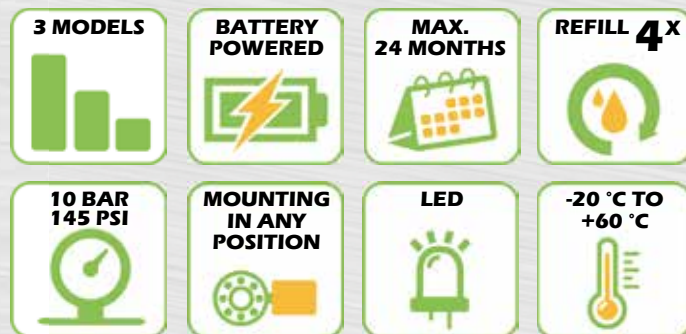

GRUETZNER
A U T O M A T I C L U B R I C A T I O N

Gruetzner GmbH
Kohlenhofstr. 60
90443 Nuremberg, Germany
info@G-LUBE.com
www.G-LUBE.com