

PRODUCT INFO

Swivel cross clamp mountings DGK are made of drawn aluminum profiles and have slitted clamping points machined by cutting methods.


The clamping point bores are arranged offset in the plane and can be clamped at any angle to a centered connecting bolt using a grub screw. They receive rods and tubes with round or square cross-sections via the additionally incorporated square bore.

For clamping, stainless steel socket cap screws DIN 912-A2-70 combine with the clamping thread to reduce the bore cross-section of the clamping points. For regular tool-free clamping, adjustable hand lever sets are available as accessories under the designation HK.

RoHS-compliant product




1C

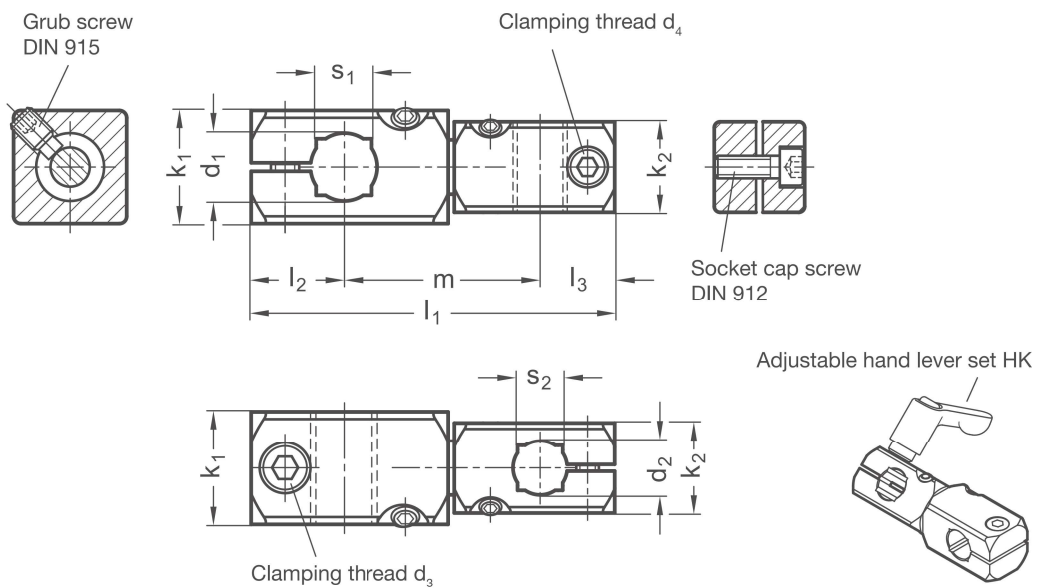

Clamping point 1	Clamping point 2											Accessories	
Bore d_1	Bore d_2	Clamping thread d_3	Clamping thread d_4	k_1	k_2	l_1	l_2	l_3	m	Square s_1	Square s_2	Hand lever set HK for d_3	Hand lever set HK for d_4
B 8	B 8	M 4	M 4	16	16	52,5	13	13	26,5	-	-	M 4-16	M 4-16
B 10	B 8	M 5	M 5	20	16	58	15,5	13	29,5	8	-	M 5-20	M 4-16
B 10	B 10	M 5	M 5	20	20	63,5	15,5	15,5	32,5	8	8	M 5-20	M 5-20
B 12	B 8	M 5	M 5	20	16	62	16,5	13	32,5	10	-	M 5-20	M 4-16
B 12	B 12	M 5	M 5	20	20	71,5	16,5	16,5	38,5	10	10	M 5-20	M 5-20
B 15	B 10	M 6	M 6	25	16	75,5	20	15,5	40	12	8	M 5-25	M 5-20
B 15	B 12	M 6	M 6	25	20	79,5	20	16,5	43	12	10	M 6-25	M 6-20
B 15	B 15	M 6	M 6	25	25	87,5	20	20	47,5	12	12	M 6-25	M 6-25
B 16	B 12	M 6	M 6	25	20	81	20	16,5	44,5	-	10	M 6-25	M 6-20
B 16	B 16	M 6	M 6	25	25	90,5	20	20	50,5	-	-	M 6-25	M 6-25
B 20	B 15	M 6	M 6	30	25	95	22	20	53	16	12	M 6-30	M 6-25
B 20	B 16	M 6	M 6	30	25	96,5	22	20	54,5	16	-	M 6-30	M 6-25
B 20	B 20	M 6	M 6	30	30	102,5	22	22	58,5	16	16	M 6-30	M 6-30

Surface	
G	Tumbled, matt
S	Anodized black

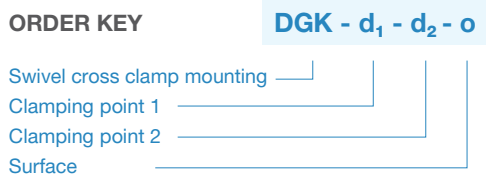

ACCESSORIES

– Adjustable hand lever set **HK** see page 172

ON REQUEST

- Clamping points with special diameter
- Screw points with hex head screws
- Surface anodized in colors

2D
2C
2B
2A
1D
1C
1B
1A