

STROKE BUSH

SLIDE ROTARY BUSH

STROKE BUSH

| | |
|---|------|
| STRUCTURE AND ADVANTAGES | E-2 |
| ALLOWABLE SPEED FOR COMBINED ROTATION AND STROKE MOTION | E-2 |
| RATED LOAD AND RATED LIFE | E-2 |
| FIT | E-3 |
| USE AND HANDLING PRECAUTIONS | E-5 |
| DIMENSION TABLE | E-6~ |

SLIDE ROTARY BUSH SRE SERIES

| | |
|------------------------------|-------|
| STRUCTURE AND ADVANTAGES | E-10 |
| RATED LOAD AND RATED LIFE | E-12 |
| APPLICATION EXAMPLES | E-14 |
| USE AND HANDLING PRECAUTIONS | E-15 |
| FELT SEAL | E-15 |
| DIMENSION TABLE | E-16~ |

SLIDE ROTARY BUSH RK TYPE

| | |
|--------------------------|------|
| STRUCTURE AND ADVANTAGES | E-26 |
| LIFE CALCULATION | E-26 |
| DIMENSION TABLE | E-27 |

STROKE BUSH

The NB stroke bush is a linear and rotational motion mechanism utilizing the rotational motion of ball elements between an outer cylinder and a shaft. It is compact and can withstand high loading.

The retainer is made of a light metal alloy with high wear resistance. Smooth motion is achieved under high-speed and high-acceleration conditions.

Although the linear motion is limited to a specific stroke length, the combined rotation and stroke motion is achieved with very little frictional resistance. The NB stroke bush can be conveniently used in a variety of applications.


STRUCTURE AND ADVANTAGES

The retainer in the NB stroke bush positions the ball elements in a zigzag arrangement. The inner surface of the outer cylinder is finished by precision grinding, resulting in smooth motion of the ball elements. Each of the ball elements is held in a separate hole and smooth motion is achieved for both rotational motion and linear motion. The retainer moves half the length of the linear motion, therefore, the stroke length is limited to approximately twice the length the retainer can travel within the outer cylinder.

High Precision

High-carbon chromium bearing steel is used for the outer cylinder. It is heat treated and ground to achieve high rigidity and accuracy.

Figure E-1 Structure of SR Stroke Bush

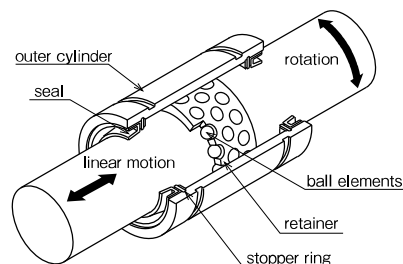

Ease of Mounting and Replacement

The highly accurate fabrication of the NB stroke bush results in uniform dimensions, facilitating parts replacement and housing fabrication.

Light Weight and Space Saving

The use of an aluminum alloy for the retainer and the thin-wall outer cylinder makes the NB stroke bush light weight and compact.

Lubrication

One lubrication hole is provided on each oil groove of the outer cylinder, making it easy to lubricate the SR stroke bush.

ALLOWABLE SPEED FOR COMBINED ROTATION AND STROKE MOTION

The allowable speed for combined rotation and stroke motion is obtained from the following equation:

The value of DN is given as follows depending on the lubrication method.

$$DN \geq dm \cdot n + 10 \cdot S \cdot n_1$$

| | |
|------------------------|------------|
| for oil lubrication | DN=600,000 |
| for grease lubrication | DN=300,000 |

note: $n \leq 5,000$ $S \cdot n_1 \leq 50,000$

RATED LOAD AND RATED LIFE

The relationship between the rated load and life of the stroke bush is expressed as follows:

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \times 10^6$$

L: rated life
 f_H: hardness coefficient
 f_T: temperature coefficient
 f_C: contact coefficient
 f_W: applied load coefficient
 C: basic dynamic load rating (N)
 P: applied load (N)
 ※Refer to page Eng-5 for the coefficients.

●For combined rotation and stroke motion

$$L_h = \frac{L}{60\sqrt{(dm \cdot n)^2 + (10 \cdot S \cdot n_1)^2} / dm}$$

●For stroke motion

$$L_h = \frac{L}{600 \cdot S \cdot n_1 / (\pi \cdot dm)}$$

L_h: life time (hr)
 S: stroke length (mm)
 n: revolutions per min. (rpm)
 n₁: number of cycles per minute (cpm)
 dm: ball pitch diameter (mm) ≈ 1.15 dr

FIT

The fits generally used between the shaft and the housing are listed in Table E-2. The inner contact diameters of the SR stroke bush are listed in the dimension tables. The shaft diameter tolerance should be selected to achieve the desired amount of radial clearance (see Table E-3). Please pay attention that high-speed linear motion can cause the retainer to slip due to inertial force. In selecting a shaft, please take note of:
 Hardness: 58HRC or more (refer to hardness coefficient on page Eng-5) recommended
 Surface Roughness: less than Ra0.4 recommended

Table E-2



| normal operating condition | | vertical use or highly accurate case | |
|----------------------------|---------|--------------------------------------|---------|
| shaft | housing | shaft | housing |
| k5,m5 | H6,H7 | n5,p6 | J6,J7 |

Table E-3 Radial Clearance Negative Limit

| part number | limit (μm) |
|-------------|------------|
| 6 | - 2 |
| 8~10 | - 3 |
| 12~16 | - 4 |
| 20~30 | - 5 |
| 35~50 | - 6 |
| 60~80 | - 8 |
| 100 | -10 |

TYPE


Table E-1 Type

| | Standard Type | Double Retainer Type |
|---------|---|---|
| SR TYPE |  P.E-6 | SR-B TYPE  P.E-8 |

MOUNTING

Examples of mounting methods of Stroke Bush are shown in Figure E-2. To avoid deformation, do not fix outer cylinder by using set screw.

Figure E-2 Mounting Method

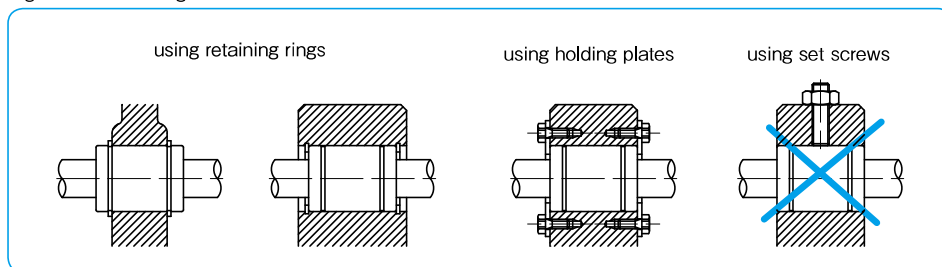

LUBRICATION

Appropriate lubrication is needed to ensure the accuracy of NB Stroke Bush and to maintain bearing life. Anti-rust oil is applied to NB Stroke Bush prior to shipment. The NB selected anti-rust oil has a little to no effect on lubricants, however, please apply lubricant only after cleaning Stroke Bush with kerosene, etc.

Grease Lubricant


Prior to usage, please apply grease, and re-lubricate periodically according to the operating conditions. (Lithium soap-based grease is recommended.) Relubrication can be done by directly applying grease inside the ball bush or by using oil hole as Figure E-3 shows.

A special low dust generation grease is optional for clean room application. Please refer to page Eng-40.

Oil Lubricant

Prior to usage, please apply oil directly to the shaft surface or by using oil hole as Figure E-3 shows. Turbine oil (ISO standard VG32-68) is recommended.

Figure E-3 Oil hole

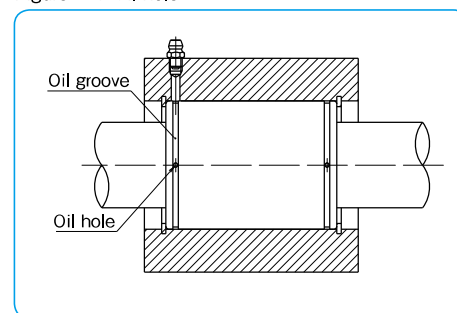

USE AND HANDLING PRECAUTIONS

Maximum Stroke

The maximum stroke in the dimension table is the stroke limit.

Retainer Slippage

The retainer can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is suggested that the stroke to be set as a 80% of the maximum stroke in the dimension table. It is also recommended that the bush be cycled to perform the maximum stroke several times, so that the retainer returns to its central position.


Accuracy

The accuracies of the SR stroke bush are stated in the dimension tables. Since the outer cylinder deforms due to tension from the retaining ring, the dimension of the outer cylinder is an average value at points P, where calculated using the following equation:

$$W = 4 + L/8$$

W: the distance from the end of the outer cylinder to measurement point P
L: the length of the outer cylinder

Figure E-4 Outer Cylinder Measurement Points

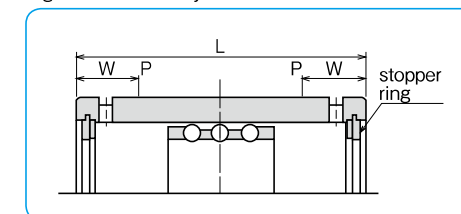

Operating Temperature Range

The operating temperature is ranging from -20 °C to 110°C. In case of operation at temperature outside this range, please contact NB.

Dust Prevention

Dust and other contaminations affect the bush's lifetime and accuracy if dust or particle enter into inside of bush. Although seals work under a normal environment, in a harsh environment, it is necessary to attach protective covers.

SR TYPE

—Standard Type—




part number structure

example **SR 20**

SR type

inner contact diameter (dr)

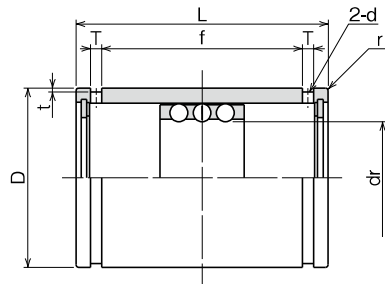

SR-UU TYPE

—Standard Type with Seals—




part number structure

example **SR 20 UU**

SR type

inner contact diameter (dr)

seals on both sides

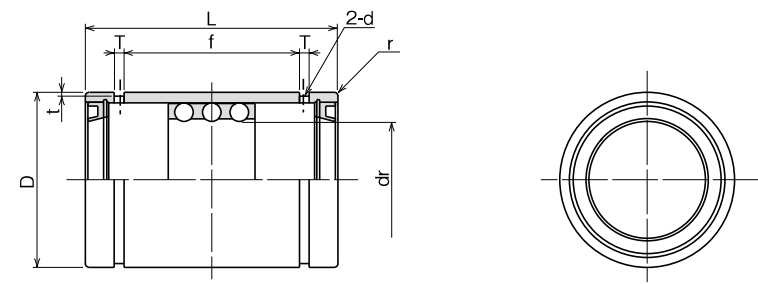

| part number | maximum stroke mm | number of rows | dr mm | major dimensions | | | | | | | | basic load rating | | mass g | | |
|-------------|----------------------|----------------|----------|------------------|---------|-----------------|---------|-----------------|---------|---------|---------|-------------------|---------|-----------|-------------------|-------------------|
| | | | | tolerance μm | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | | dynamic C N | static Co N |
| SR 6 | 19 | 3 | 6 | +22 | 12 | 0 | 20 | | 11.3 | 1.1 | 0.5 | 1 | 0.5 | 216 | 147 | 8.9 |
| SR 8 | 24 | 3 | 8 | +13 | 15 | -11 | 24 | | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 343 | 245 | 15.6 |
| SR 10 | 30 | 3 | 10 | +17 | 19 | 0 | 30 | 0 | 22.7 | 1.5 | 0.5 | 1.2 | 0.5 | 637 | 461 | 28.8 |
| SR 12 | 32 | 3 | 12 | +27 | 23 | 0 | 32 | -0.2 | 24.5 | 1.5 | 0.5 | 1.2 | 0.5 | 1,070 | 813 | 42 |
| SR 16 | 40 | 3 | 16 | +16 | 28 | -13 | 37 | | 29.1 | 1.5 | 0.7 | 1.3 | 0.5 | 1,180 | 990 | 71 |
| SR 20 | 50 | 3 | 20 | +33 | 32 | 0 | 45 | | 35.8 | 2 | 0.7 | 1.5 | 0.5 | 1,260 | 1,170 | 99 |
| SR 25 | 50 | 3 | 25 | +20 | 37 | -16 | 45 | | 35.8 | 2 | 0.7 | 1.6 | 1 | 1,330 | 1,330 | 117 |
| SR 30 | 82 | 3 | 30 | | 45 | 65 | | | 53.5 | 2.5 | 1 | 2 | 1 | 2,990 | 3,140 | 205 |
| SR 35 | 92 | 3 | 35 | | 52 | 70 | 0 | | 58.5 | 2.5 | 1 | 2 | 1.5 | 3,140 | 3,530 | 329 |
| SR 40 | 108 | 3 | 40 | +41 | 60 | 0 | 80 | -0.3 | 68.3 | 2.5 | 1 | 2 | 1.5 | 4,120 | 4,800 | 516 |
| SR 50 | 138 | 3 | 50 | +25 | 72 | -19 | 100 | | 86.4 | 3 | 1 | 2.5 | 1.5 | 5,540 | 6,910 | 827 |
| SR 60 | 138 | 3 | 60 | +49 | 85 | 0 | 100 | | 86.4 | 3 | 1 | 2.5 | 2 | 5,980 | 8,230 | 1,240 |
| SR 80 | 132 | 3 | 80 | +30 | 110 | -22 | 100 | 0 | 86 | 3 | 1.5 | 2.5 | 2 | 7,840 | 12,200 | 2,050 |
| SR100 | 132 | 3 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 86 | 3 | 1.5 | 2.5 | 2 | 8,430 | 14,700 | 2,440 |

1N≒0.102kgf

| part number | maximum stroke mm | number of rows | dr mm | major dimensions | | | | | | | | basic load rating | | mass g | | |
|-------------|----------------------|----------------|----------|------------------|---------|-----------------|---------|-----------------|---------|---------|---------|-------------------|---------|-----------|-------------------|-------------------|
| | | | | tolerance μm | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | | dynamic C N | static Co N |
| SR 8UU | 14 | 3 | 8 | +22 | 15 | 0/-11 | 24 | | 12.3 | 1.5 | 0.5 | 1.2 | 0.5 | 343 | 245 | 15.6 |
| SR 10UU | 16 | 3 | 10 | +13 | 19 | 0 | 30 | 0 | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 637 | 461 | 28.8 |
| SR 12UU | 18 | 3 | 12 | +27 | 23 | -13 | 32 | -0.2 | 21.1 | 1.5 | 0.5 | 1.2 | 0.5 | 1,070 | 813 | 42 |
| SR 16UU | 26 | 3 | 16 | +16 | 28 | 0 | 37 | | 26.8 | 2 | 0.7 | 1.3 | 0.5 | 1,180 | 990 | 71 |
| SR 20UU | 36 | 3 | 20 | +33 | 32 | 0 | 45 | | 26.8 | 2 | 0.7 | 1.5 | 0.5 | 1,260 | 1,170 | 99 |
| SR 25UU | 36 | 3 | 25 | +20 | 37 | -16 | 45 | | 26.8 | 2 | 0.7 | 1.6 | 1 | 1,330 | 1,330 | 117 |
| SR 30UU | 68 | 3 | 30 | | 45 | 65 | | | 45.1 | 2.5 | 1 | 2 | 1 | 2,990 | 3,140 | 205 |
| SR 35UU | 76 | 3 | 35 | +41 | 52 | 70 | 0 | | 50.1 | 2.5 | 1 | 2 | 1.5 | 3,140 | 3,530 | 329 |
| SR 40UU | 91 | 3 | 40 | +25 | 60 | 0 | 80 | -0.3 | 59.9 | 2.5 | 1 | 2 | 1.5 | 4,120 | 4,800 | 516 |
| SR 50UU | 116 | 3 | 50 | | 72 | -19 | 100 | | 77.4 | 3 | 1 | 2.5 | 1.5 | 5,540 | 6,910 | 827 |
| SR 60UU | 117 | 3 | 60 | +49 | 85 | 0 | 100 | | 77.4 | 3 | 1 | 2.5 | 2 | 5,980 | 8,230 | 1,240 |
| SR 80UU | 110 | 3 | 80 | +30 | 110 | -22 | 100 | 0 | 77 | 3 | 1.5 | 2.5 | 2 | 7,840 | 12,200 | 2,050 |
| SR100UU | 110 | 3 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 77 | 3 | 1.5 | 2.5 | 2 | 8,430 | 14,700 | 2,440 |

1N≒0.102kgf

SR-B TYPE


–Double Retainer Type–



part number structure

example **SR 20 B**

SR type
inner contact diameter (dr)
double retainer

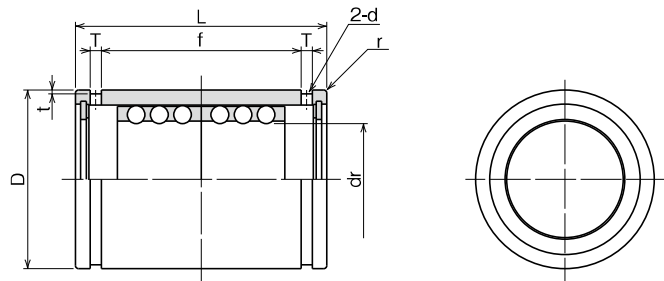

SR-BUU TYPE


–Double Retainer Type with Seals–



part number structure

example **SR 30 B UU**

SR type
inner contact diameter (dr)
double retainer
seals on both sides

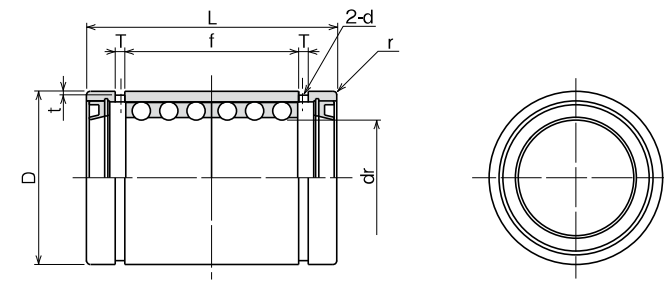

| part number | maximum stroke mm | number of rows | dr mm | tolerance μm | major dimensions | | | | | | | basic load rating | | | | |
|-------------|----------------------|----------------|----------|-----------------|------------------|-----------------|---------|-----------------|---------|---------|---------|-------------------|---------|-------------------|-------------------|-----------|
| | | | | | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | dynamic C N | static Co N | mass g |
| SR 8B | 8 | 6 | 8 | +22 | 15 | 0/-11 | 24 | 0 | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 549 | 490 | 16.8 |
| SR 10B | 8 | 6 | 10 | +13 | 19 | 0 | 30 | 0 | 22.7 | 1.5 | 0.5 | 1.2 | 0.5 | 1,030 | 931 | 31.2 |
| SR 12B | 8 | 6 | 12 | +27 | 23 | -13 | 32 | -0.2 | 24.5 | 1.5 | 0.5 | 1.2 | 0.5 | 1,720 | 1,630 | 46 |
| SR 16B | 16 | 6 | 16 | +16 | 28 | 0 | 37 | 0 | 29.1 | 1.5 | 0.7 | 1.3 | 0.5 | 1,910 | 1,980 | 75 |
| SR 20B | 20 | 6 | 20 | +33 | 32 | 0 | 45 | 0 | 35.8 | 2 | 0.7 | 1.5 | 0.5 | 2,060 | 2,320 | 106 |
| SR 25B | 20 | 6 | 25 | +20 | 37 | -16 | 45 | 0 | 35.8 | 2 | 0.7 | 1.6 | 1 | 2,170 | 2,670 | 125 |
| SR 30B | 44 | 6 | 30 | +33 | 45 | 0 | 65 | 0 | 53.5 | 2.5 | 1 | 2 | 1 | 4,800 | 6,270 | 220 |
| SR 35B | 54 | 6 | 35 | +41 | 52 | 0 | 70 | 0 | 58.5 | 2.5 | 1 | 2 | 1.5 | 5,050 | 7,060 | 346 |
| SR 40B | 66 | 6 | 40 | +25 | 60 | -19 | 80 | -0.3 | 68.3 | 2.5 | 1 | 2 | 1.5 | 6,710 | 9,560 | 540 |
| SR 50B | 88 | 6 | 50 | +25 | 72 | -19 | 100 | 0 | 86.4 | 3 | 1 | 2.5 | 1.5 | 8,970 | 13,800 | 862 |
| SR 60B | 88 | 6 | 60 | +49 | 85 | 0 | 100 | 0 | 86.4 | 3 | 1 | 2.5 | 2 | 9,700 | 16,500 | 1,290 |
| SR 80B | 76 | 6 | 80 | +30 | 110 | -22 | 100 | 0 | 86 | 3 | 1.5 | 2.5 | 2 | 12,700 | 24,300 | 2,110 |
| SR 100B | 76 | 6 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 86 | 3 | 1.5 | 2.5 | 2 | 13,700 | 29,400 | 2,520 |

1N≒0.102kgf

| part number | maximum stroke mm | number of rows | dr mm | tolerance μm | major dimensions | | | | | | | basic load rating | | | | |
|-------------|----------------------|----------------|----------|-----------------|------------------|-----------------|---------|-----------------|---------|---------|---------|-------------------|---------|-------------------|-------------------|-----------|
| | | | | | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | dynamic C N | static Co N | mass g |
| SR 30BUU | 30 | 6 | 30 | +33/+20 | 45 | 0/-16 | 65 | 0 | 45.1 | 2.5 | 1 | 2 | 1 | 4,800 | 6,270 | 220 |
| SR 35BUU | 38 | 6 | 35 | +41 | 52 | 0 | 70 | 0 | 50.1 | 2.5 | 1 | 2 | 1.5 | 5,050 | 7,060 | 346 |
| SR 40BUU | 49 | 6 | 40 | +25 | 60 | -19 | 80 | -0.3 | 59.9 | 2.5 | 1 | 2 | 1.5 | 6,710 | 9,560 | 540 |
| SR 50BUU | 66 | 6 | 50 | +25 | 72 | -19 | 100 | 0 | 77.4 | 3 | 1 | 2.5 | 1.5 | 8,970 | 13,800 | 862 |
| SR 60BUU | 67 | 6 | 60 | +49 | 85 | 0 | 100 | 0 | 77.4 | 3 | 1 | 2.5 | 2 | 9,700 | 16,500 | 1,290 |
| SR 80BUU | 54 | 6 | 80 | +30 | 110 | -22 | 100 | 0 | 77 | 3 | 1.5 | 2.5 | 2 | 12,700 | 24,300 | 2,110 |
| SR 100BUU | 54 | 6 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 77 | 3 | 1.5 | 2.5 | 2 | 13,700 | 29,400 | 2,520 |

1N≒0.102kgf