



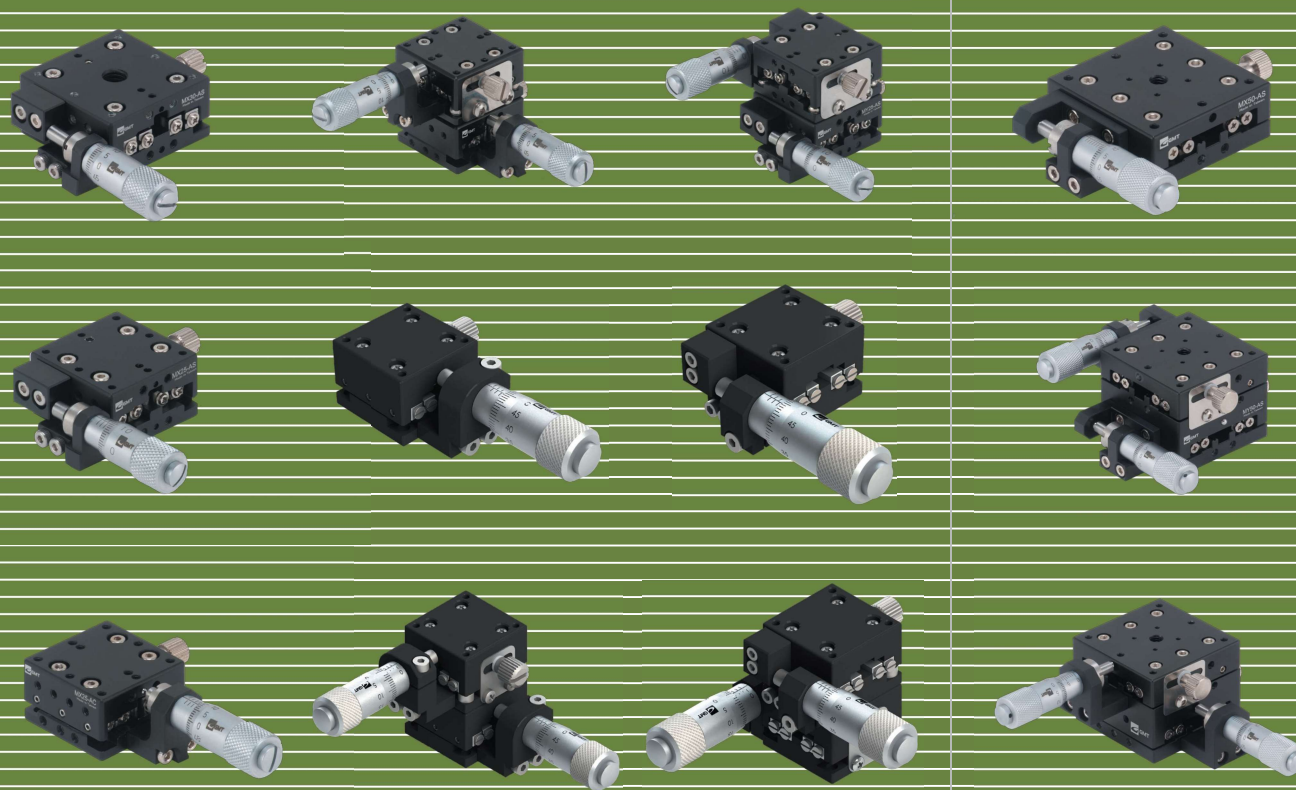


Product
Specification
**Positioning
Stages**


MYW40-SS




MYW60-SS



MYW80-SS



MYW100-SS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MYW40-SS	40*40	XY-axis	Side	±6.5	10	3	9	0.34	SUS 440C	Electroless nickel plating
MYW60-SS	60*60			±6.5			19	0.64		
MYW80-SS	80*80			±12.5			20	1.32		
MYW100-SS	100*100			±12.5			25	2		


MYW40-SS

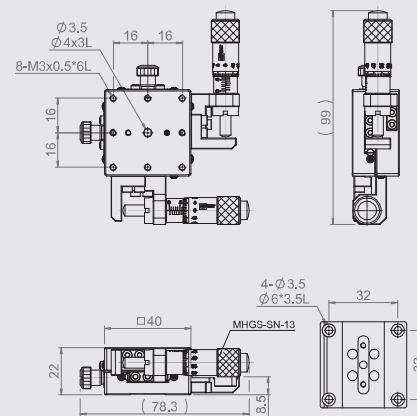


MYW60-SS

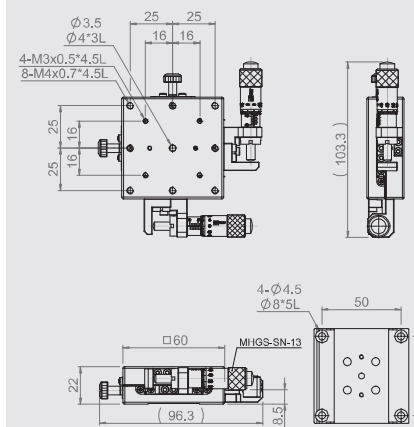


MYW80-SS

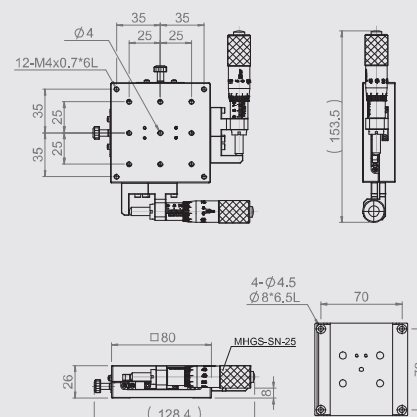


MYW100-SS

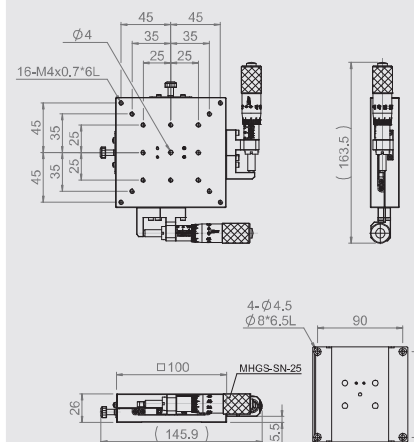


MYW40-SC

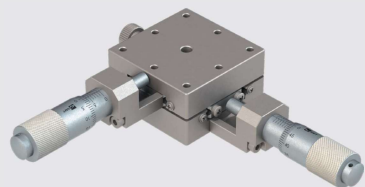


MYW60-SC

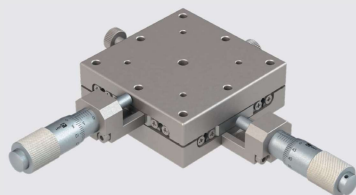

MYW80-SC

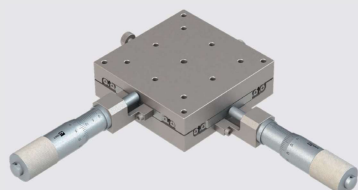

MYW100-SC

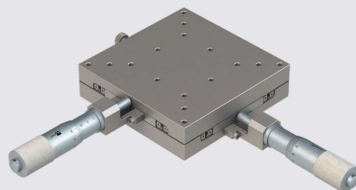


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MYW40-SC	40*40	XY-axis	Central	±6.5	10	3	9	0.34	SUS 440C	Electroless nickel plating
MYW60-SC	60*60						19	0.64		
MYW80-SC	80*80						20	1.32		
MYW100-SC	100*100			±12.5			25	2		


MYW40-SC

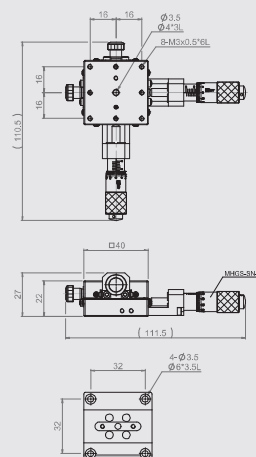

MYW60-SC

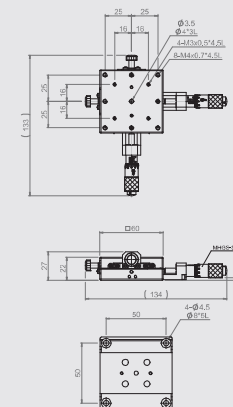

MYW80-SC

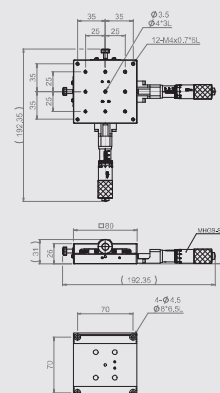

MYW100-SC

