

# Damping Technology

ACE: Your partner for industrial shock absorbers,  
gas springs and vibration control

**Main Catalogue 2017**



**Complete Product Range  
Data Sheets & Catalogues  
CAD Database  
Free Calculation Programs  
Distributors  
Services  
News  
etc.**

**[www.ace-ace.com](http://www.ace-ace.com)**



**Dear customer,**

You have made the right decision.

You will find 300 pages of comprehensive information on the application fields of automation control, motion control, vibration control and safety products. Each section is marked with a different colour. This integrated concept is reflected in all documentation, the demonstration vehicle, our exhibition stand and our [www.ace-ace.com](http://www.ace-ace.com) website. Our web presentation, the tool for professionals, also offers the ACE YouTube channel with an extensive CAD library and calculation aids.

Innovations can as usual be found in the table of contents and on the individual catalogue pages.

ACE products assist you in making your production and processes faster, more efficient, quieter, easier, safer and more sustainable – underpinned by ACE product quality and our 5 star service.

**Your**

Jürgen Roland (Managing Director)

**Free Service Hotline**

Tell us about your requirements and take advantage of our more than 40 years of expert knowledge in damping technology. Our specialists in engineering discuss your requirements with you and demonstrate our possibilities. Take advantage of our service hotline

**T +49 (0)2173 - 9226-4100**

Also, our regional managers are genuine shock absorber specialists. They will visit you onsite, note down the field data and work out customized solutions for you.

Furthermore: ACE service support and products are available in more than 40 countries worldwide.

**CAD Online Calculation Program**

With our user-friendly calculation program in the internet you can select the right product – online or via download of the program. The CAD data is available in all standard formats in 2D and 3D.

**[www.ace-ace.com](http://www.ace-ace.com)**

Our specialist engineers create detailed technical solutions for you including assembly suggestions and details on machine loads, brake time and workload etc.

# Motion Control

**Gas Springs – Push Type, Gas Springs – Pull Type  
Hydraulic Dampers, Hydraulic Feed Controls  
Rotary Dampers**





# Perfect Support for Muscle Power

## Customised to suit your applications

**The various products from ACE in this segment give a new quality to any type of movement. Anyone who wants to raise or lower loads, regulate the feed of an object to the precise millimetre or gently decelerate rotating or linear movements will find the right helper here.**

ACE also convinces with industry quality in this area. And the innovative solutions also correspond with the maximum requirements of ergonomics and individuality, including with customised, fillable gas springs.



# Industrial Gas Springs – Push Type

## Lifting and lowering for smart people

**Anyone who wants to lift or lower loads with control and without excessive strength relies on the industrial gas push type springs from ACE. These maintenance-free, ready-to-install machine elements, which are available from stock, support sheer muscle power and reliably open and hold.**

Available with body diameters of 8 mm to 70 mm and forces from 10 N to 13,000 N, ACE gas push type springs are characterised by a huge variety and maximum service life. The first is achieved thanks to the number of available connections and fittings for simple attachment and the latter with high quality design and materials. Whether they are made of steel or stainless steel, these components make any work easier and also make a particularly good impression visually in every branch.

**Ready-to-install and universally applicable**

**Modular end fittings and mounting brackets**

**Calculation program for individual design**

**No own construction costs**

**Maintenance-free**

**Available with valve ex stock**




## Function of a Gas Spring – Push Type

ACE gas springs are individually filled to a predetermined pressure to suit a customer's requirement (extension Force  $F_1$ ). The cross-sectional area of the piston rod and filling pressure determines the extension force.

During the compression of the piston rod, nitrogen flows through an orifice in the piston from the full bore side of the piston to the annulus. The nitrogen is compressed by the volume of the piston rod. As the piston rod is compressed the pressure increases, so increasing the reaction force (progression). The force depends on the proportional relationship between the piston rod and the inner tube diameter, which is approximately linear.

### Calculation Principles

#### Force-Stroke Characteristics of Gas Spring (Push Type)



Free  
calculation service  
see page 172!

$F_1$  = nominal force at 20 °C  
(this is the pressure figure normally used when specifying the gas spring)

$F_2$  = force in the complete compressed position

When compressing the piston rod, there is an additional friction force caused by the contact pressure of the seals (this **only** occurs **during the compression stroke**):

$F_3$  = force at the beginning of the compression stroke

$F_4$  = force at the end of the compression stroke

#### Gas Springs (Push Type)

TYPES	Progression approx. %	<sup>1</sup> Friction $F_R$ approx. in N
GS-8	29 - 33 <sup>2</sup>	10
GS-10	13 - 16 <sup>2</sup>	10
GS-12	20 - 35 <sup>2</sup>	20
GS-15	30 - 40 <sup>2</sup>	20
GS-19	24 - 35 <sup>2</sup>	30
GS-22	30 - 40 <sup>2</sup>	30
GS-28	63 - 76 <sup>2</sup>	40
GS-40	38 - 50 <sup>2</sup>	50
GS-70	25	50

<sup>1</sup> Depending on the filling force

<sup>2</sup> Depending on the stroke

**Progression:** (the slope of the force line in the diagram above) is due to the reduction of the internal gas volume as the piston rod moves from its initial position to its fully stroked position. The approx. progression values given above for standard springs can be altered on request.

**Effect of temperature:** The nominal  $F_1$  figure is given at 20 °C. An increase of 10 °C will increase force by 3.4 %.

**Filling tolerances:** -20 N to +40 N or 5 % to 7 %. Depending on size and extension force the tolerances can differ.

## Industrial Gas Springs – Push Type



### GS-8 to GS-70

Valve Technology

**Individual stroke length and extension forces**

Hoods, Shutters, Machine housing, Conveyor systems

Page 134



### GS-8-V4A to GS-40-VA

Valve Technology, Stainless Steel

**With food grade oil according to FDA approval**

Hoods, Shutters, Machine housing, Conveyor systems

Page 144



### GST-40 Tandem

Valve Technology

**Optimised dual force for heavy flaps and wide angle applications**

Hoods, Shutters, Machine housing, Conveyor systems

Page 154

## GS-8 to GS-70

### Individual stroke length and extension forces

#### Valve Technology


**Force range 10 N to 13,000 N**

**Stroke 20 mm to 1,000 mm**

Universal and tailor made: ACE industrial gas push type springs of the NEWTONLINE family offer perfect support of muscle power with forces from 10 to 13,000 N with body diameter of 8 to 70 mm. With their high quality features the NEWTONLINE gas springs form the industry standard. These durable and sealed systems are ready for installation, maintenance-free and filled with pressurised nitrogen gas.

They are supplied filled according to individual customer pressure requirements and maybe adjusted later by use of the inbuilt valve. The free of charge ACE calculation service designs the gas springs with mounting points specifically for the particular application. A variety of additional components makes assembly even easier and allows universal application of the gas springs.

ACE industrial gas push type springs are used in industrial applications, mechanical engineering and medical technology as well as in the electronics, automobile and furniture industries.

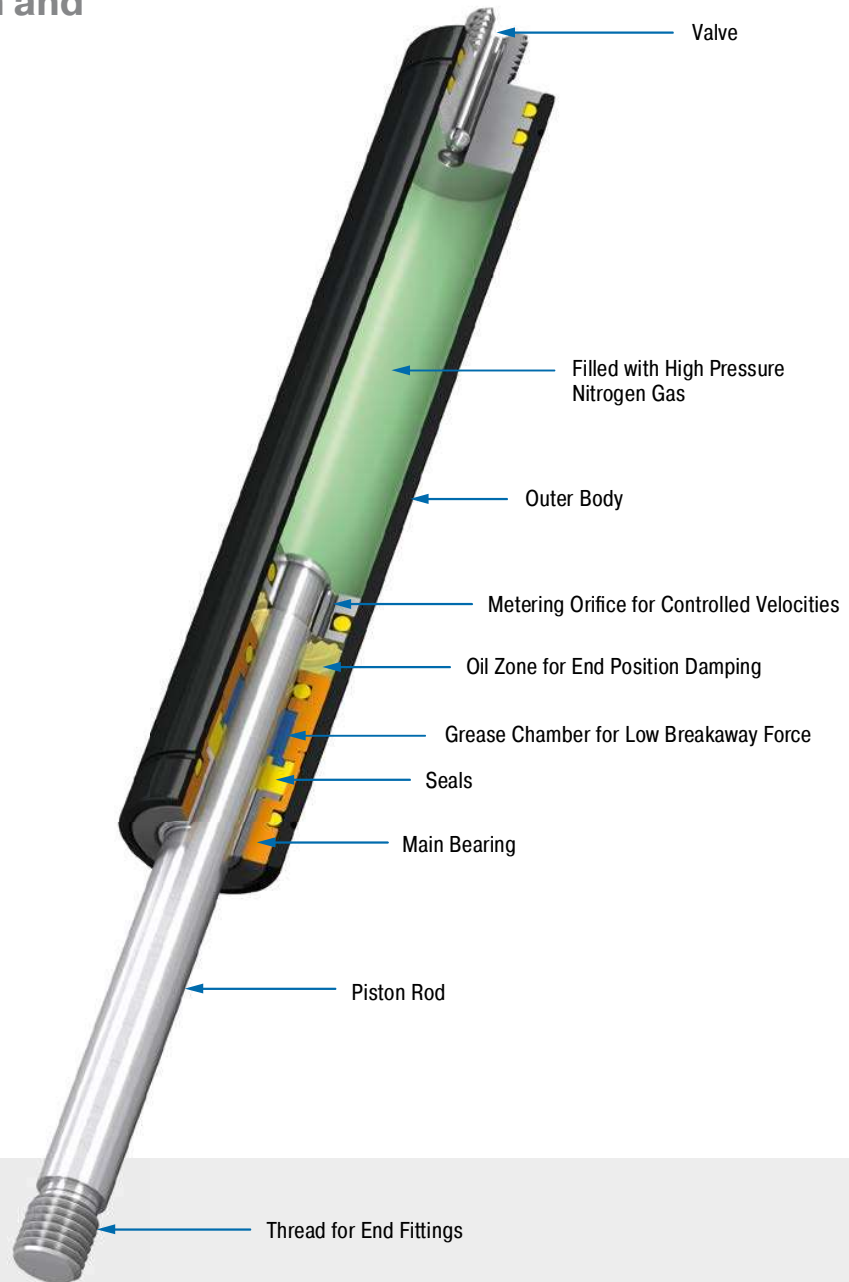

#### Technical Data

**Extension force:** 10 N to 13,000 N

**Piston rod diameter:** Ø 3 mm to Ø 30 mm

**Progression:** approx. 13 % to 76 % (depending on size and stroke)

**Lifetime:** Approx. 10,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: coated steel; Piston rod: steel or stainless steel with wear-resistant coating; End fittings: zinc plated steel

**Operating fluid:** nitrogen gas and oil

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** Approx. 5 mm to 70 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** hoods, shutters, machine housing, conveyor systems, control boxes, furniture industry, jacking applications, assembly stations, vehicle technology, folding elements

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.


**On request:** Special oils and other special options. Alternative accessories. Different end position damping and extension speed.

End Fitting

Standard Dimensions

End Fitting


A3.5

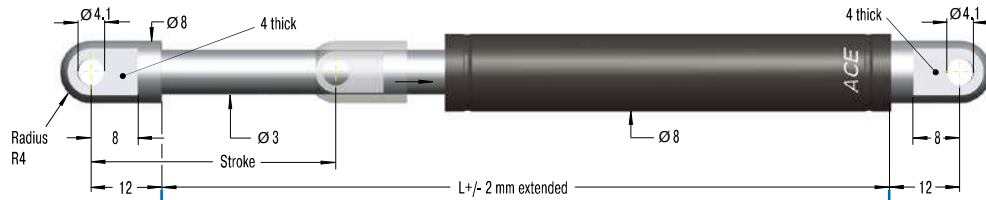

Eye A3.5  
max. force 370 N

B3.5

C3.5




Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-8-20	20	72	100
GS-8-30	30	92	100
GS-8-40	40	112	100
GS-8-50	50	132	100
GS-8-60	60	152	100
GS-8-80	80	192	100

Stud Thread B3.5

Angle Ball Joint C3.5  
max. force 370 N

D3.5




Ordering Example

Type (Push Type) \_\_\_\_\_  
Body Ø (8 mm) \_\_\_\_\_  
Stroke (30 mm) \_\_\_\_\_  
Piston Rod End Fitting A3.5 \_\_\_\_\_  
Body End Fitting C3.5 \_\_\_\_\_  
Nominal Force  $F_1$  30 N \_\_\_\_\_

GS-8-30-AC-30


Clevis Fork D3.5  
max. force 370 N

E3.5




Swivel Eye E3.5  
max. force 370 N

G3.5



Ball Socket G3.5  
max. force 370 N

Rod Shroud W3.5-8



Mounting accessories see from  
page 200.

Adjuster Knob  
DE-GAS-3.5  
See page 175.

Technical Data

**Extension force:** 10 N to 100 N (compressed up to 133 N)

**Progression:** Approx. 29 % to 33 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: coated steel; Piston rod: stainless steel (1.4301/1.4305, AISI 304/303); End fittings: zinc plated steel

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 5 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.

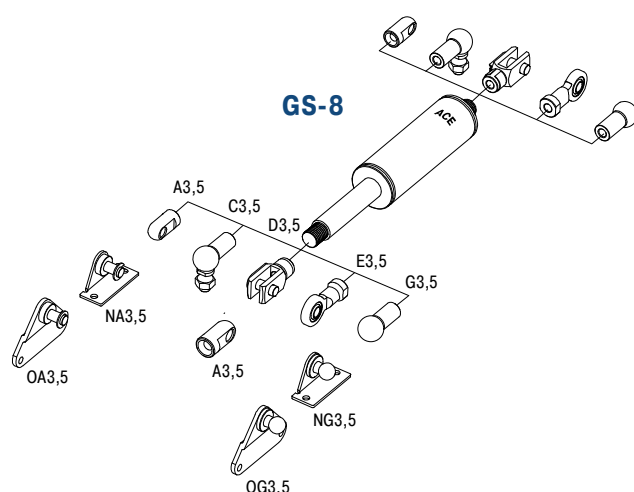

Valve Technology, Extension force 10 N to 100 N (compressed up to 116 N)

## End Fitting

## Standard Dimensions


## End Fitting

## A3.5


**Eye A3.5**  
 max. force 370 N

## B3.5

## C3.5




## Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-10-20	20	72	100
GS-10-30	30	92	100
GS-10-40	40	112	100
GS-10-50	50	132	100
GS-10-60	60	152	100
GS-10-80	80	192	100


## Stud Thread B3.5

**Angle Ball Joint C3.5**  
 max. force 370 N


## D3.5


**Clevis Fork D3.5**  
 max. force 370 N


## E3.5


**Swivel Eye E3.5**  
 max. force 370 N

## G3.5


**Ball Socket G3.5**  
 max. force 370 N


## Rod Shroud W3.5-10



## Ordering Example

Type (Push Type) \_\_\_\_\_  
 Body Ø (10 mm) \_\_\_\_\_  
 Stroke (80 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5 \_\_\_\_\_  
 Body End Fitting C3.5 \_\_\_\_\_  
 Nominal Force  $F_1$  60 N \_\_\_\_\_

GS-10-80-AC-60

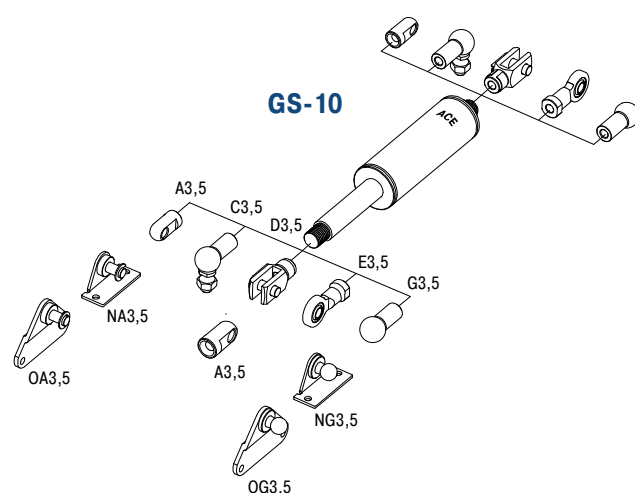 Mounting accessories see from  
 page 200.


## Technical Data

**Extension force:** 10 N to 100 N (compressed up to 116 N)**Progression:** Approx. 13 % to 16 %**Operating temperature range:** -20 °C to +80 °C**Material:** Outer body: coated steel; Piston rod: stainless steel (1.4301/1.4305, AISI 304/303); End fittings: zinc plated steel**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.**End position damping length:** approx. 5 mm (depending on the stroke)**Positive stop:** External positive stop at the end of stroke provided by the customer.**Note:** Increased break-away force if unit has not moved for some time.**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.




**End Fitting**

**Standard Dimensions**

**End Fitting**


**A3.5**

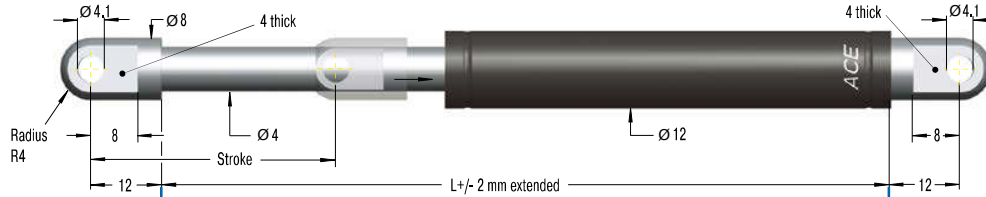

**Eye A3.5**  
max. force 370 N

**B3.5**

**C3.5**




**Performance and Dimensions**

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-12-20	20	72	180
GS-12-30	30	92	180
GS-12-40	40	112	180
GS-12-50	50	132	180
GS-12-60	60	152	180
GS-12-80	80	192	150
GS-12-100	100	232	150
GS-12-120	120	272	120
GS-12-150	150	332	100

**Stud Thread B3.5**


**Angle Ball Joint C3.5**  
max. force 370 N

**D3.5**




**Clevis Fork D3.5**  
max. force 370 N

**E3.5**



**Swivel Eye E3.5**  
max. force 370 N

**G3.5**



**Ball Socket G3.5**  
max. force 370 N


**Ordering Example**

Type (Push Type) \_\_\_\_\_  
Body Ø (12 mm) \_\_\_\_\_  
Stroke (100 mm) \_\_\_\_\_  
Piston Rod End Fitting A3.5 \_\_\_\_\_  
Body End Fitting A3.5 \_\_\_\_\_  
Nominal Force F<sub>1</sub> 30 N \_\_\_\_\_

**GS-12-100-AA-30**

Mounting accessories see from  
page 200.


**Rod Shroud W3.5-12**



**Adjuster Knob  
DE-GAS-3.5**

See page 175.

**GS-12**

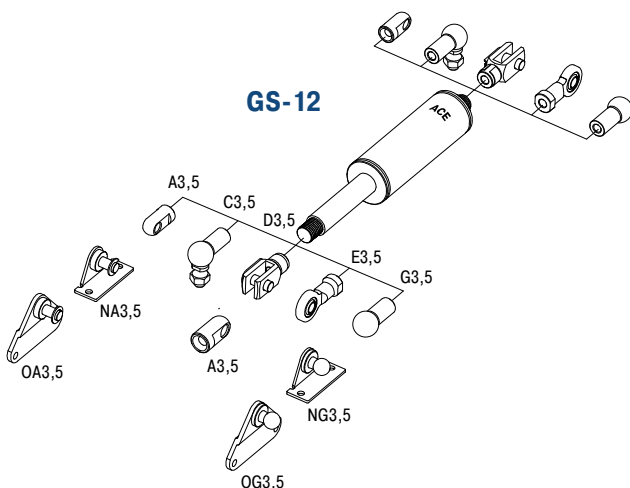

**Technical Data**

**Extension force:** 15 N to 180 N (compressed up to 243 N)

**Progression:** Approx. 20 % to 35 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: coated steel; Piston rod: stainless steel (1.4301/1.4305, AISI 304/303); End fittings: zinc plated steel

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 10 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.

Valve Technology, Extension force 40 N to 400 N (compressed up to 560 N)

## End Fitting

### Standard Dimensions

## End Fitting

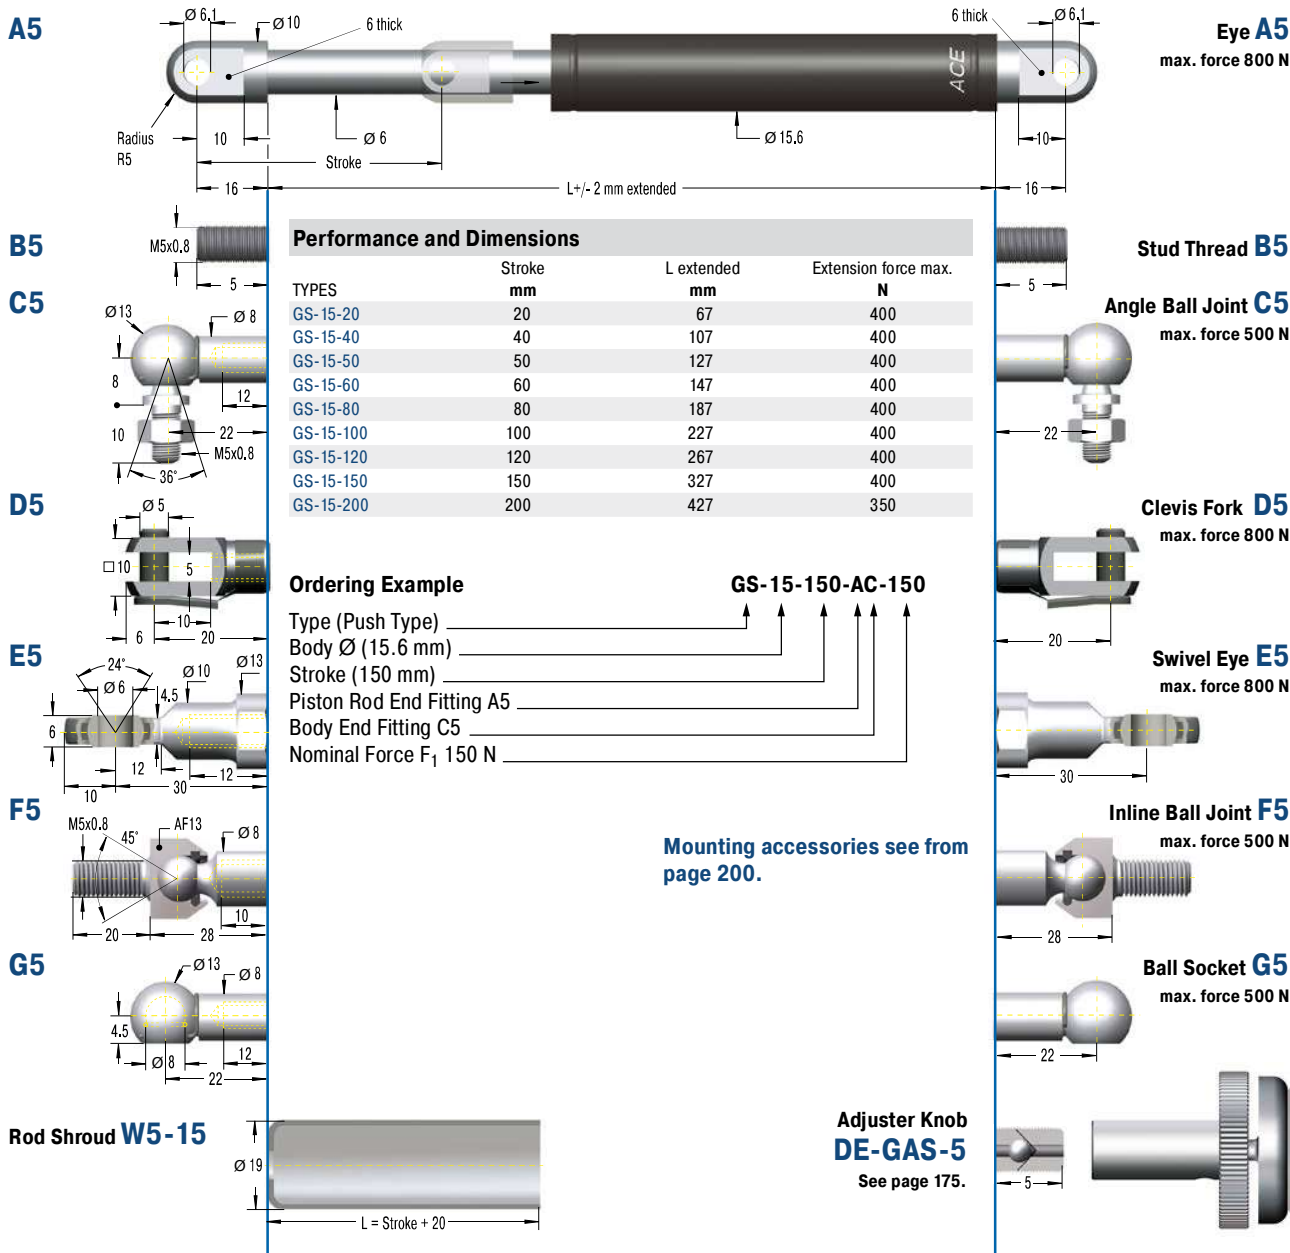

## Technical Data

**Extension force:** 40 N to 400 N (compressed up to 560 N)

**Progression:** Approx. 30 % to 40 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: steel coated with UV paint; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 10 mm  
(depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.



**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.

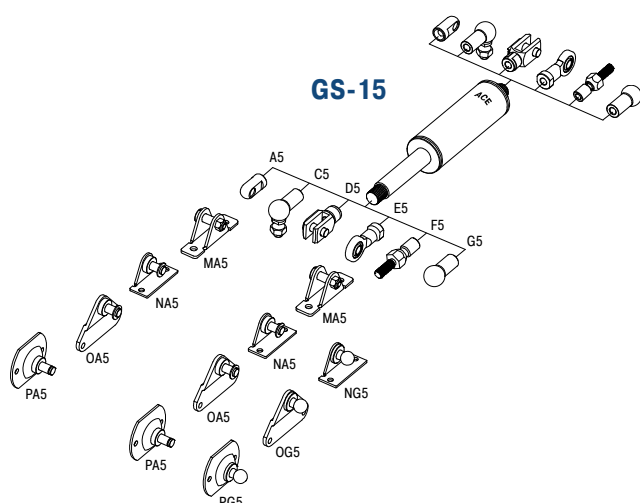



## End Fitting

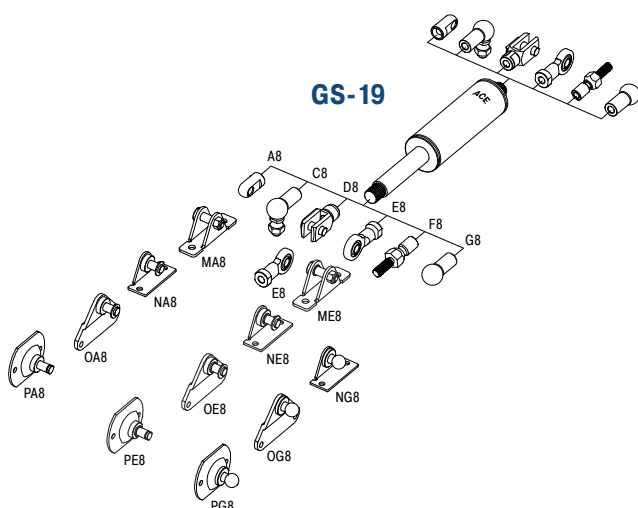


Valve Technology, Extension force 80 N to 1,300 N (compressed up to 1,820 N)

## End Fitting

## Standard Dimensions

## End Fitting

A8

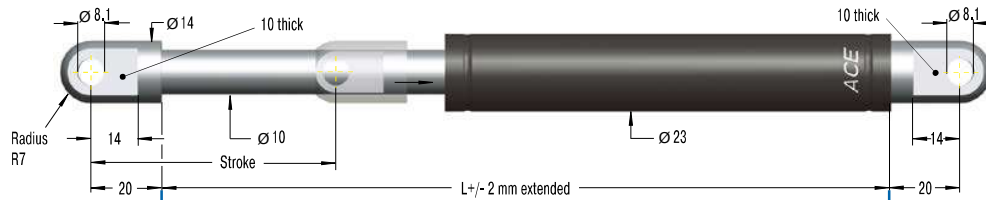


Eye A8

max. force 3,000 N

B8

C8




Stud Thread B8

Angle Ball Joint C8

max. force 1,200 N


D8



Clevis Fork D8

max. force 3,000 N


E8



Swivel Eye E8

max. force 3,000 N


F8



Inline Ball Joint F8

max. force 1,200 N


G8



Ball Socket G8

max. force 1,200 N

Rod Shroud W8-22



## Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-22-50	50	164	1,300
GS-22-100	100	264	1,300
GS-22-150	150	364	1,300
GS-22-200	200	464	1,300
GS-22-250	250	564	1,300
GS-22-300	300	664	1,100
GS-22-350	350	764	850
GS-22-400	400	864	650
GS-22-450	450	964	550
GS-22-500	500	1,064	450
GS-22-550	550	1,164	400
GS-22-600	600	1,264	350
GS-22-650	650	1,364	300
GS-22-700	700	1,464	250

## Ordering Example

Type (Push Type) \_\_\_\_\_  
 Body Ø (23 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting E8 \_\_\_\_\_  
 Nominal Force  $F_1$  800 N \_\_\_\_\_

GS-22-150-AE-800

 Mounting accessories see from  
 page 200.

 Adjuster Knob  
 DE-GAS-8  
 See page 175.

## Technical Data

Extension force: 80 N to 1,300 N (compressed up to 1,820 N)

Progression: Approx. 30 % to 40 %

Operating temperature range: -20 °C to +80 °C

Material: Outer body: steel coated with UV paint; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

Mounting: In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

End position damping length: approx. 20 mm to 70 mm (depending on the stroke)

Positive stop: External positive stop at the end of stroke provided by the customer.

Note: Integrated grease chamber reduces friction and wear and optimises lubrication.

End fittings: They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


Safety instructions: Gas springs (push type) should not be installed under pre-tension.

End Fitting

Standard Dimensions

End Fitting

A10

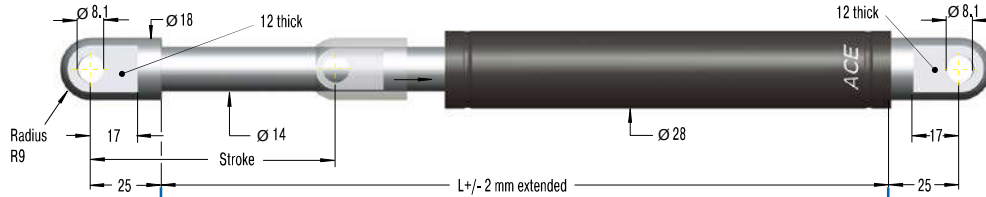

Eye A10

max. force 10,000 N

B10

Stud Thread B10

C10

Angle Ball Joint C10

max. force 1,800 N

D10

Clevis Fork D10

max. force 10,000 N

E10

Swivel Eye E10

max. force 10,000 N

F10

Inline Ball Joint F10

max. force 1,800 N

Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-28-100	100	262	2,500
GS-28-150	150	362	2,500
GS-28-200	200	462	2,500
GS-28-250	250	562	2,500
GS-28-300	300	662	2,500
GS-28-350	350	762	2,500
GS-28-400	400	862	2,400
GS-28-450	450	962	1,950
GS-28-500	500	1,062	1,600
GS-28-550	550	1,162	1,350
GS-28-600	600	1,262	1,150
GS-28-650	650	1,362	1,000
GS-28-700	700	1,462	900
GS-28-750	750	1,562	800

Ordering Example


Type (Push Type) \_\_\_\_\_  
 Body Ø (28 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E10 \_\_\_\_\_  
 Body End Fitting E10 \_\_\_\_\_  
 Nominal Force  $F_1$  1200 N \_\_\_\_\_

GS-28-150-EE-1200

Mounting accessories see from  
page 200.

Adjuster Knob  
DE-GAS-10  
See page 175.

Rod Shroud W10-28



Technical Data

**Extension force:** 150 N to 2,500 N (compressed up to 4,400 N)

**Progression:** Approx. 63 % to 76 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: steel coated with UV paint; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 30 mm to 70 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Integrated grease chamber reduces friction and wear and optimises lubrication.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.

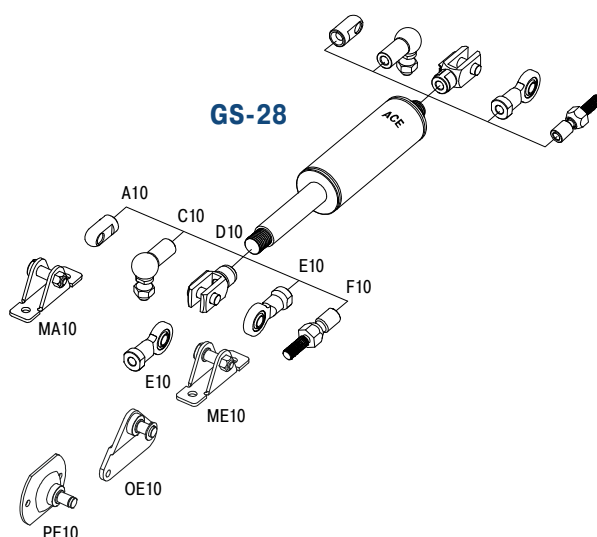


Valve Technology, Extension force 500 N to 5,000 N (compressed up to 7,500 N)

## End Fitting

## Standard Dimensions

## End Fitting

## A14

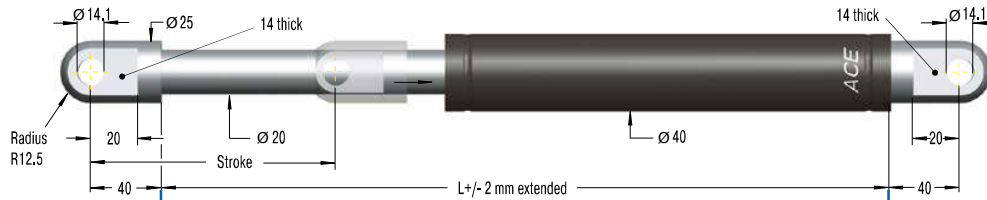


## Eye A14

max. force 10,000 N

## B14

## C14




## Stud Thread B14

## Angle Ball Joint C14

max. force 3,200 N


## D14



## Clevis Fork D14

max. force 10,000 N


## E14



## Swivel Eye E14

max. force 10,000 N


## F14



## Inline Ball Joint F14

max. force 3,200 N

## Rod Shroud W14-40



## Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-40-100	100	317	5,000
GS-40-150	150	417	5,000
GS-40-200	200	517	5,000
GS-40-250	250	617	5,000
GS-40-300	300	717	5,000
GS-40-400	400	917	5,000
GS-40-500	500	1,117	5,000
GS-40-600	600	1,317	4,150
GS-40-800	800	1,717	2,550
GS-40-1000	1,000	2,117	1,700


## Ordering Example

GS-40-150-DD-3500

Type (Push Type) \_\_\_\_\_  
 Body Ø (40 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting D14 \_\_\_\_\_  
 Body End Fitting D14 \_\_\_\_\_  
 Nominal Force  $F_1$  3500 N \_\_\_\_\_

Mounting accessories see from page 200.

## Technical Data

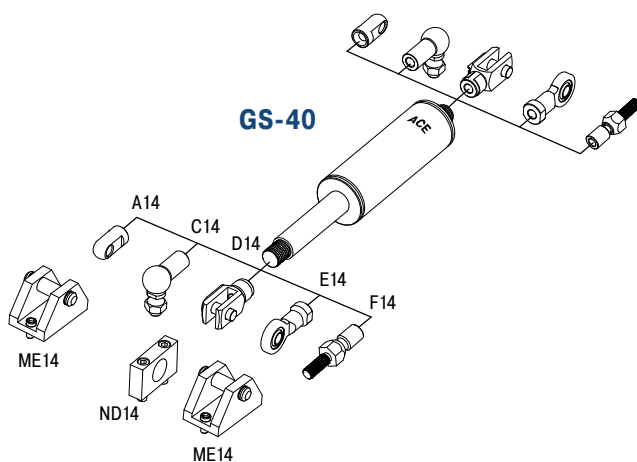
**Extension force:** 500 N to 5,000 N (compressed up to 7,500 N)**Progression:** Approx. 38 % to 50 %**Operating temperature range:** -20 °C to +80 °C**Material:** Outer body: steel coated with UV paint; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.**End position damping length:** approx. 30 mm to 70 mm (depending on the stroke)**Positive stop:** External positive stop at the end of stroke provided by the customer.**Note:** Integrated grease chamber reduces friction and wear and optimises lubrication.**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.Adjuster Knob  
DE-GAS-14

See page 175.

End Fitting

Standard Dimensions

End Fitting

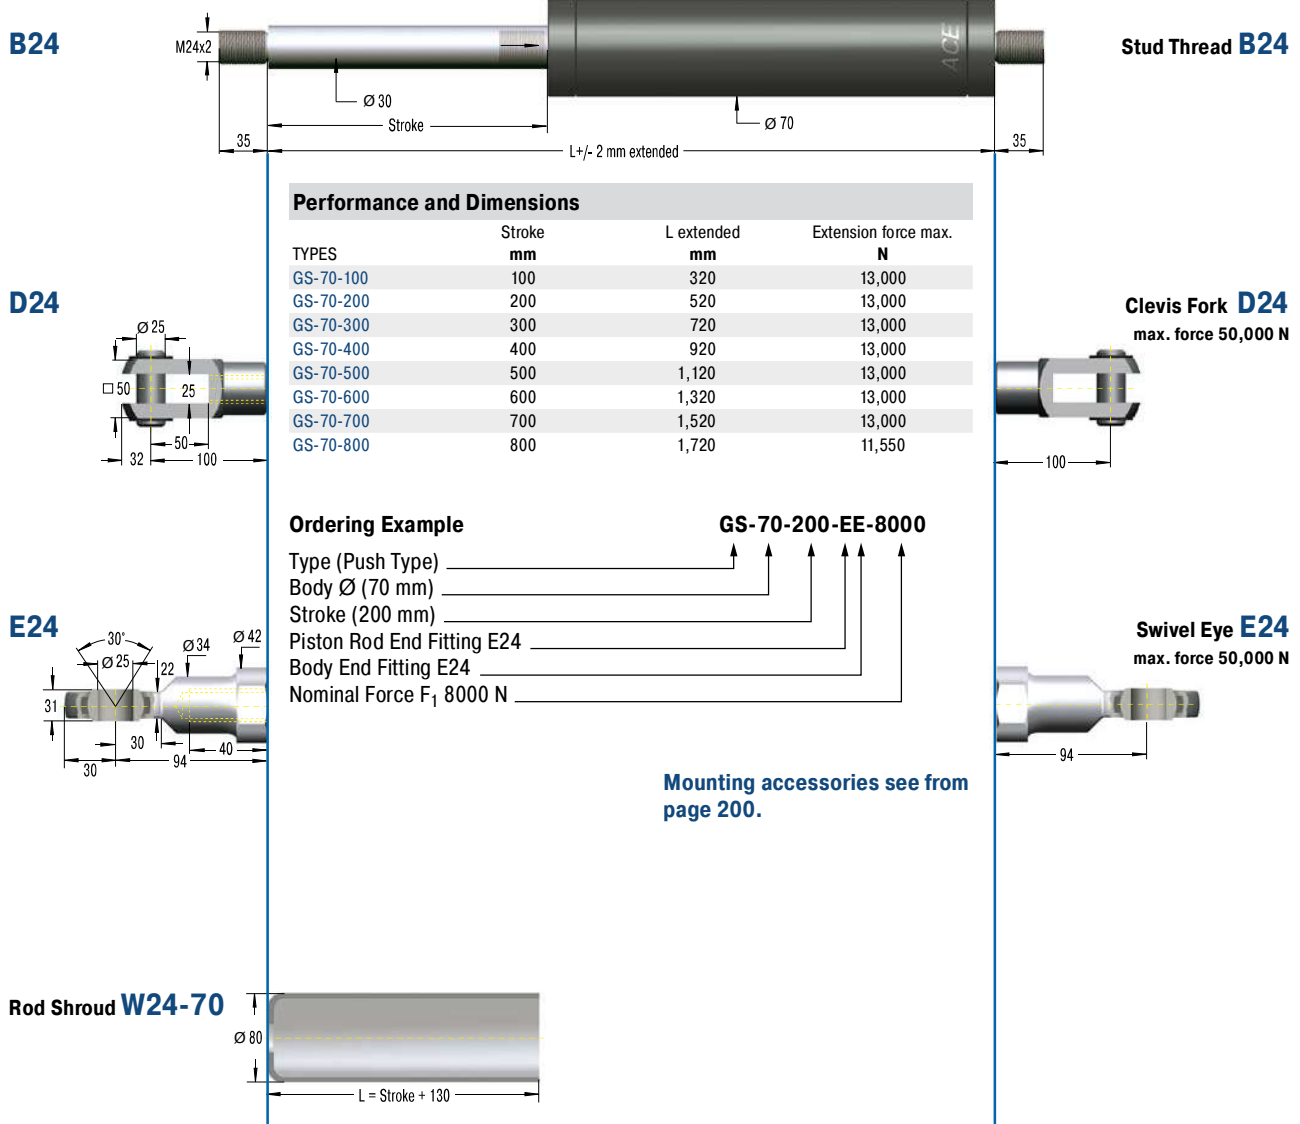

Technical Data

**Extension force:** 2,000 N to 13,000 N (compressed up to 16,250 N)

**Progression:** Approx. 25 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body: coated steel; Piston rod: hard chrome plated steel; End fittings: zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 10 mm to 20 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas springs (push type) should not be installed under pre-tension.

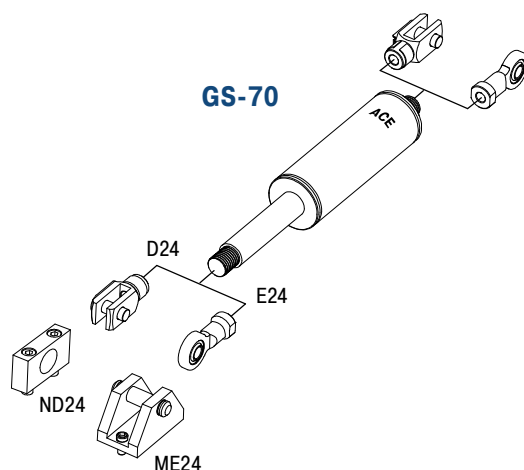



## GS-8-V4A to GS-40-VA

With food grade oil according to FDA approval

### Valve Technology, Stainless Steel


Force range 10 N to 5,000 N

Stroke 20 mm to 700 mm

Protection against corrosion and superior optics for even more sophisticated requirements: Based on ACE's industrial gas push type springs GS-8 to 40 made of steel, these models combine all advantages of stainless steel: they look great and are rust free. They are filled with food-grade oil as standard, which conforms to the requirements of FDA 21 CFR 178.3570.

These ACE gas push type springs do not only look good, they also are available in various stroke lengths and possible extension forces. A comprehensive range of accessories in stainless steel guarantees easy assembly and a broad range of uses.

ACE industrial gas pressure springs made of stainless steel are used in the automotive sector, in industrial applications, mechanical engineering and medical cleanroom technology as well as in the food, electronics and shipbuilding industries.

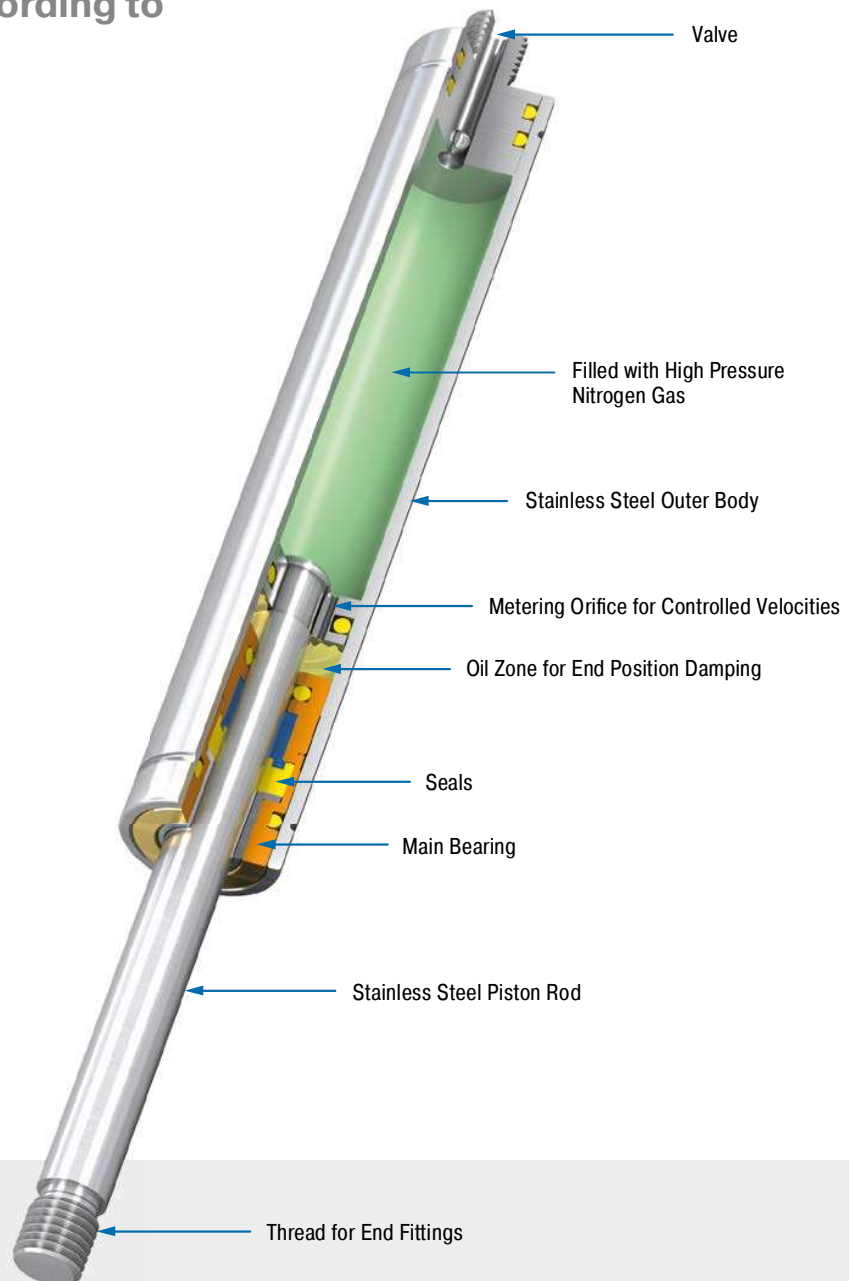

### Technical Data

**Extension force:** 10 N to 5,000 N

**Piston rod diameter:** Ø 3 mm to Ø 20 mm

**Progression:** approx. 13 % to 59 % (depending on size and stroke)

**Lifetime:** Approx. 10.000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303 and 1.4404/1.4571, AISI 316L/316Ti)

**Operating fluid:** nitrogen gas and HLP oil according to DIN 51524, part 2

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** Approx. 5 mm to 30 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** hoods, shutters, machine housing, conveyor systems, control boxes, furniture industry, shipbuilding, food industry, pharmaceutical industry, folding elements

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

**On request:** Special oils and other special options. Alternative accessories. Different end position damping and extension speed. Other gas springs material 1.4404/1.4571, AISI 316L/316Ti (V4A) available on request.

End Fitting

Standard Dimensions

End Fitting

**B3.5** M3,5x0,6 **Stud Thread B3.5**

**A3.5-V4A** **Eye A3.5-V4A**  
max. force 370 N

**C3.5-V4A** **Angle Ball Joint C3.5-V4A**  
max. force 370 N

**D3.5-V4A** **Clevis Fork D3.5-V4A**  
max. force 370 N

**G3.5-V4A** **Ball Socket G3.5-V4A**  
max. force 370 N

**Adjuster Knob DE-GAS-3.5**  
See page 175.

**Performance and Dimensions**

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-8-20-V4A	20	72	100
GS-8-30-V4A	30	92	100
GS-8-40-V4A	40	112	100
GS-8-50-V4A	50	132	100
GS-8-60-V4A	60	152	100
GS-8-80-V4A	80	192	100

**Ordering Example**

Type (Push Type) \_\_\_\_\_  
 Body Ø (8 mm) \_\_\_\_\_  
 Stroke (30 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5-V4A \_\_\_\_\_  
 Body End Fitting C3.5-V4A \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 30 N \_\_\_\_\_  
 Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**GS-8-30-AC-30-V4A**

**Mounting accessories see from page 208.**

Technical Data

**Extension force:** 10 N to 100 N (compressed up to 131 N)

**Progression:** Approx. 28 % to 31 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4404/1.4571, AISI 316L/316Ti)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 5 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

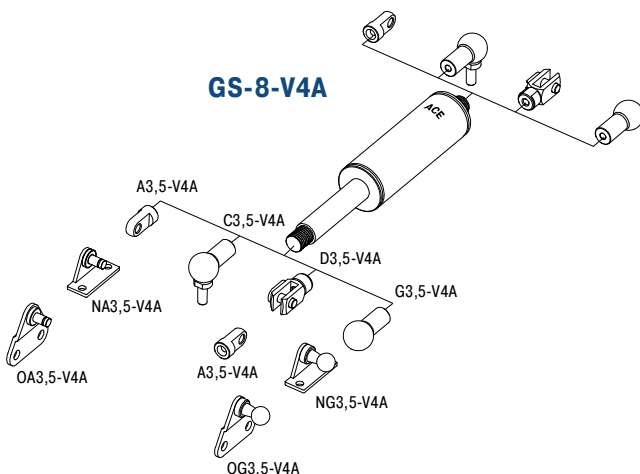

## End Fitting

## Standard Dimensions

## End Fitting

**B3.5** M3,5x0,6 **Stud Thread B3.5**

**A3.5-V4A** **Eye A3.5-V4A**  
max. force 370 N

**C3.5-V4A** **Angle Ball Joint C3.5-V4A**  
max. force 370 N

**D3.5-V4A** **Clevis Fork D3.5-V4A**  
max. force 370 N

**G3.5-V4A** **Ball Socket G3.5-V4A**  
max. force 370 N

**Adjuster Knob DE-GAS-3.5**  
See page 175.

**Performance and Dimensions**

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-10-20-V4A	20	72	100
GS-10-30-V4A	30	92	100
GS-10-40-V4A	40	112	100
GS-10-50-V4A	50	132	100
GS-10-60-V4A	60	152	100
GS-10-80-V4A	80	192	100

**Ordering Example**

GS-10-30-AC-30-V4A

Type (Push Type) \_\_\_\_\_  
 Body Ø (10 mm) \_\_\_\_\_  
 Stroke (30 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5-V4A \_\_\_\_\_  
 Body End Fitting C3.5-V4A \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 30 N \_\_\_\_\_  
 Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**Mounting accessories see from page 208.**

## Technical Data

**Extension force:** 10 N to 100 N (compressed up to 116 N)

**Progression:** Approx. 13 % to 16 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4404/1.4571, AISI 316L/316Ti)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 5 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

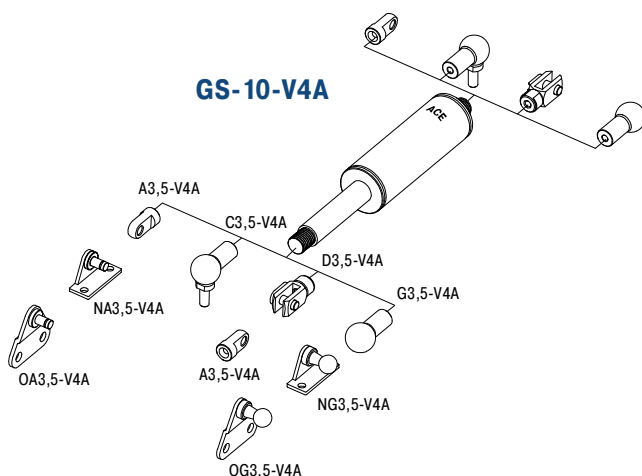



End Fitting

Standard Dimensions

End Fitting

**B3.5** M3,5x0,6 **Stud Thread B3.5**

**A3.5-V4A** **Eye A3.5-V4A**  
max. force 370 N

**C3.5-V4A** **Angle Ball Joint C3.5-V4A**  
max. force 370 N

**D3.5-V4A** **Clevis Fork D3.5-V4A**  
max. force 370 N

**G3.5-V4A** **Ball Socket G3.5-V4A**  
max. force 370 N

**Adjuster Knob DE-GAS-3.5**  
See page 175.

**Performance and Dimensions**

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-12-20-V4A	20	72	180
GS-12-30-V4A	30	92	180
GS-12-40-V4A	40	112	180
GS-12-50-V4A	50	132	180
GS-12-60-V4A	60	152	180
GS-12-80-V4A	80	192	150
GS-12-100-V4A	100	232	150
GS-12-120-V4A	120	272	120
GS-12-150-V4A	150	332	100

**Ordering Example**

GS-12-100-AA-30-V4A

Type (Push Type) \_\_\_\_\_  
 Body Ø (12 mm) \_\_\_\_\_  
 Stroke (100 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5-V4A \_\_\_\_\_  
 Body End Fitting A3.5-V4A \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 30 N \_\_\_\_\_  
 Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**Mounting accessories see from page 208.**

Technical Data

**Extension force:** 15 N to 180 N (compressed up to 225 N)

**Progression:** Approx. 20 % to 25 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4404/1.4571, AISI 316L/316Ti)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 10 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.



**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

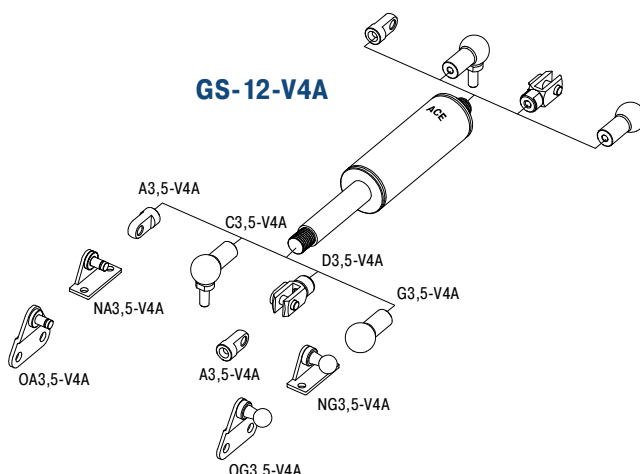

## End Fitting

## Standard Dimensions


## End Fitting

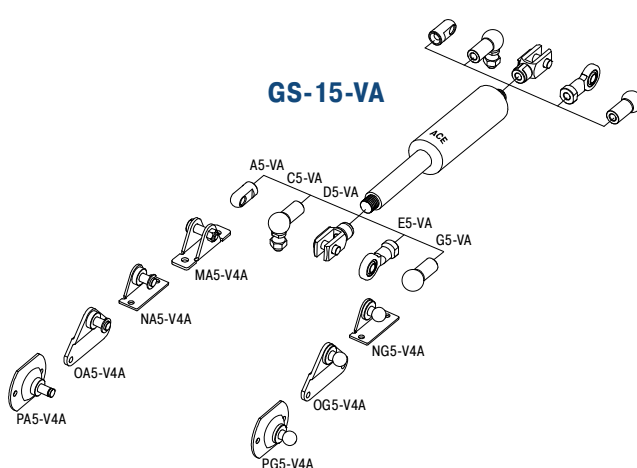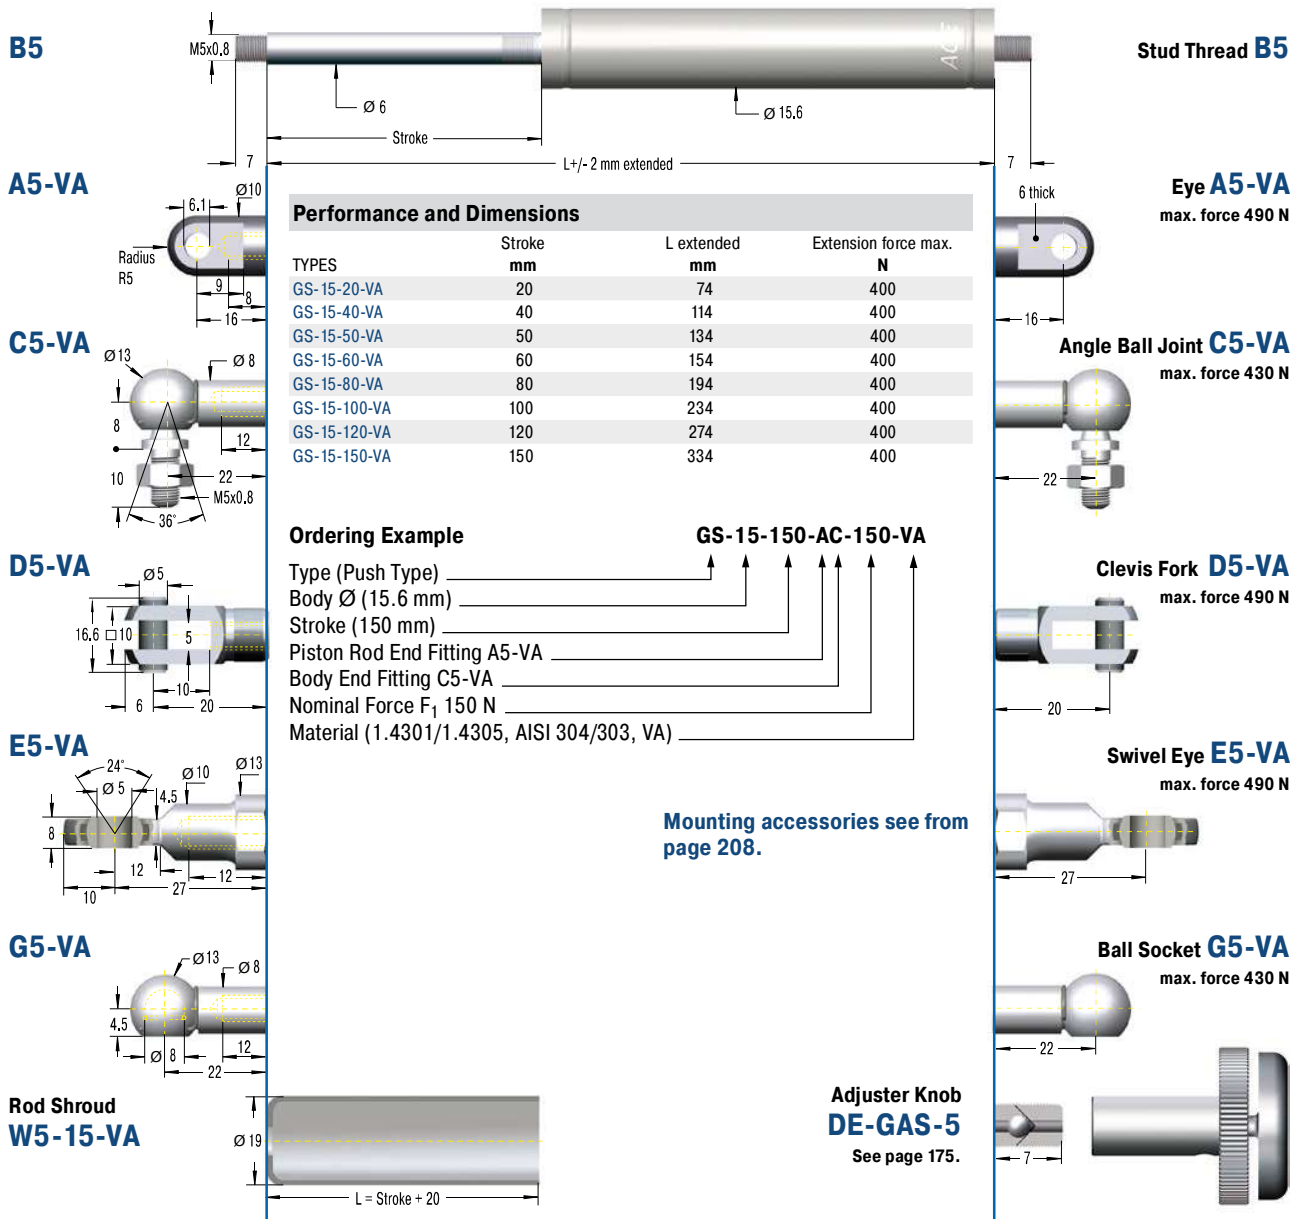

End Fitting

Standard Dimensions


End Fitting

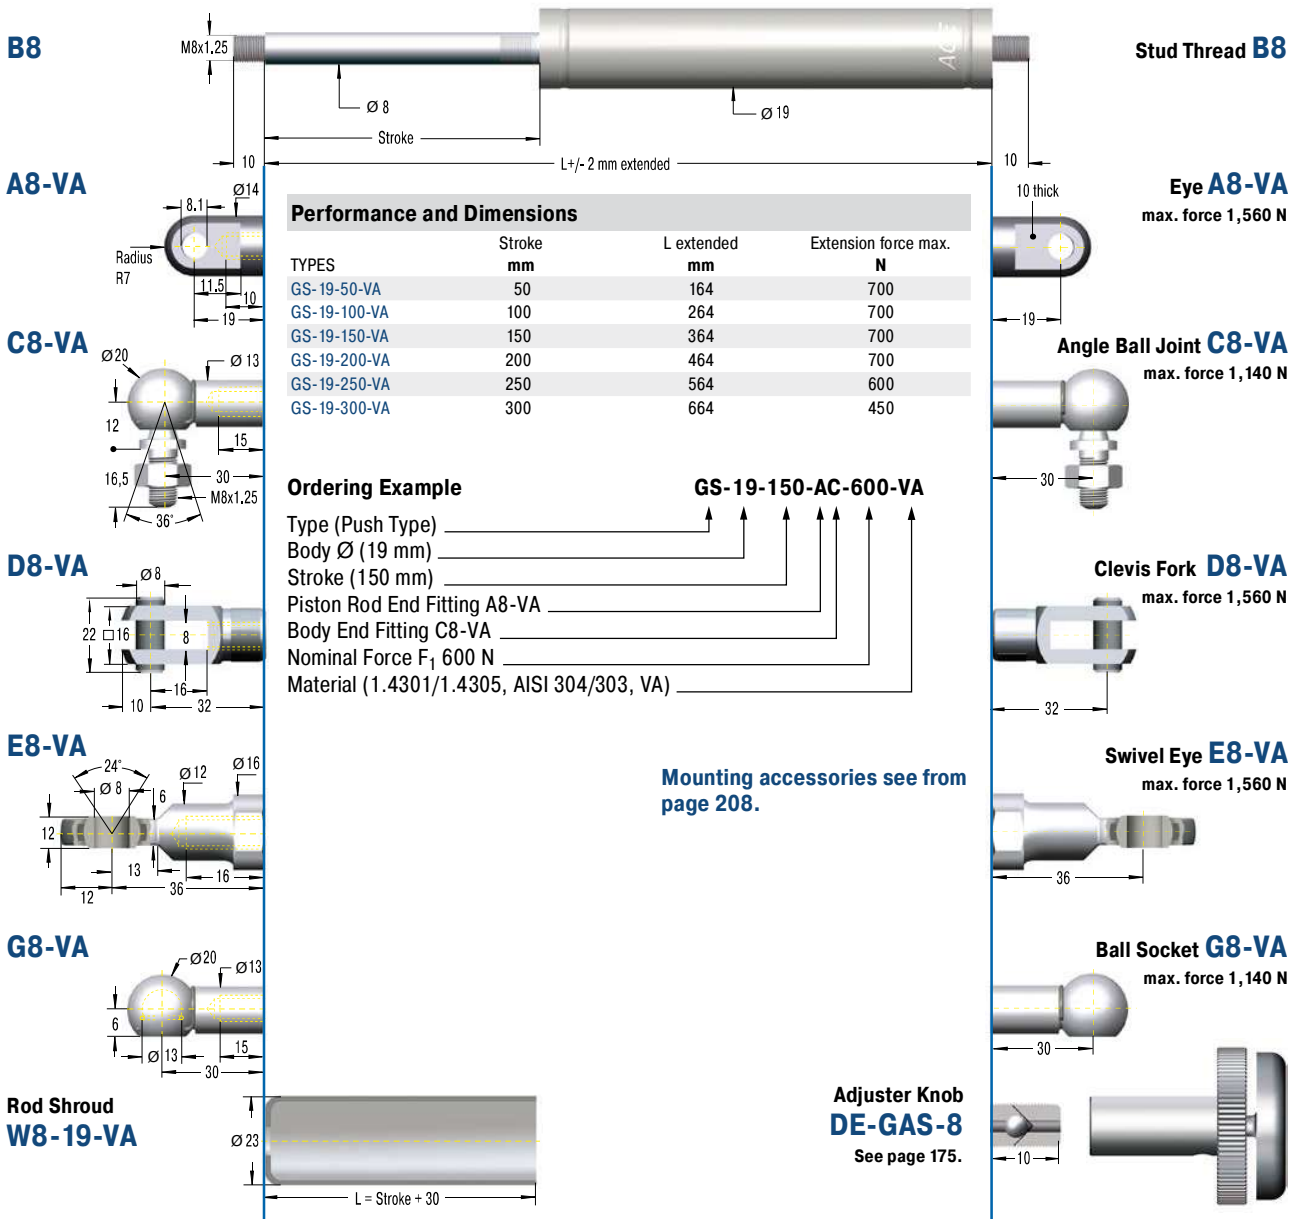

## End Fitting

## Standard Dimensions

## End Fitting

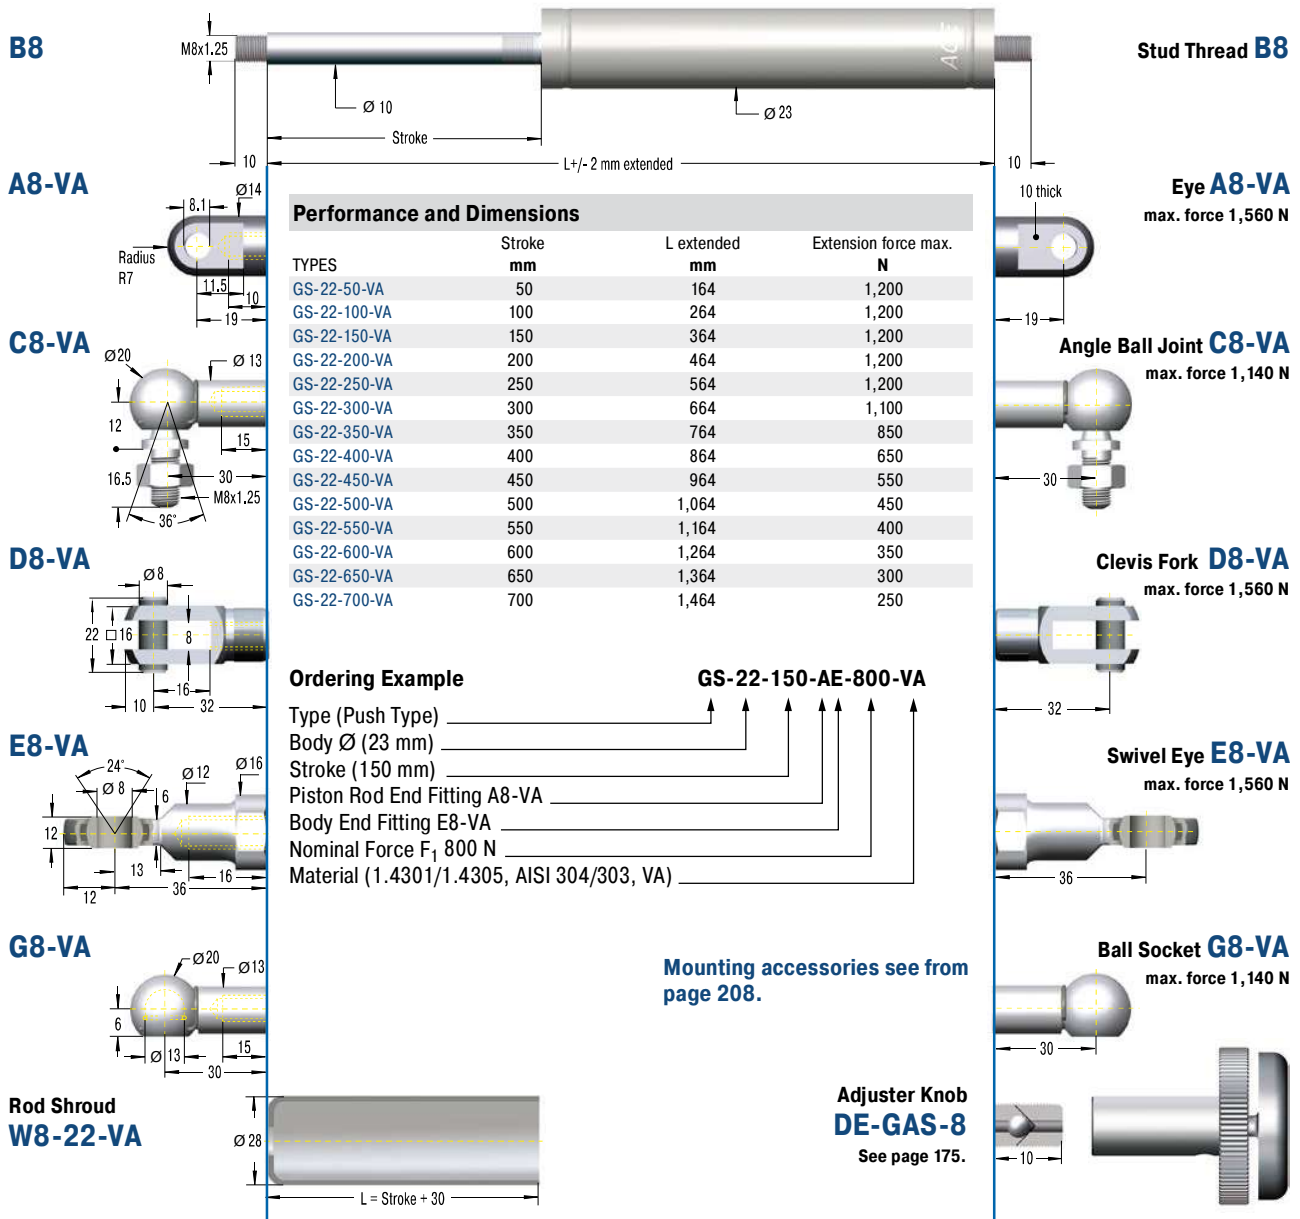

## Technical Data

**Extension force:** 100 N to 1,200 N (compressed up to 1,596 N)

**Progression:** Approx. 29 % to 33 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 20 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

**End Fitting**

**Standard Dimensions**

**End Fitting**

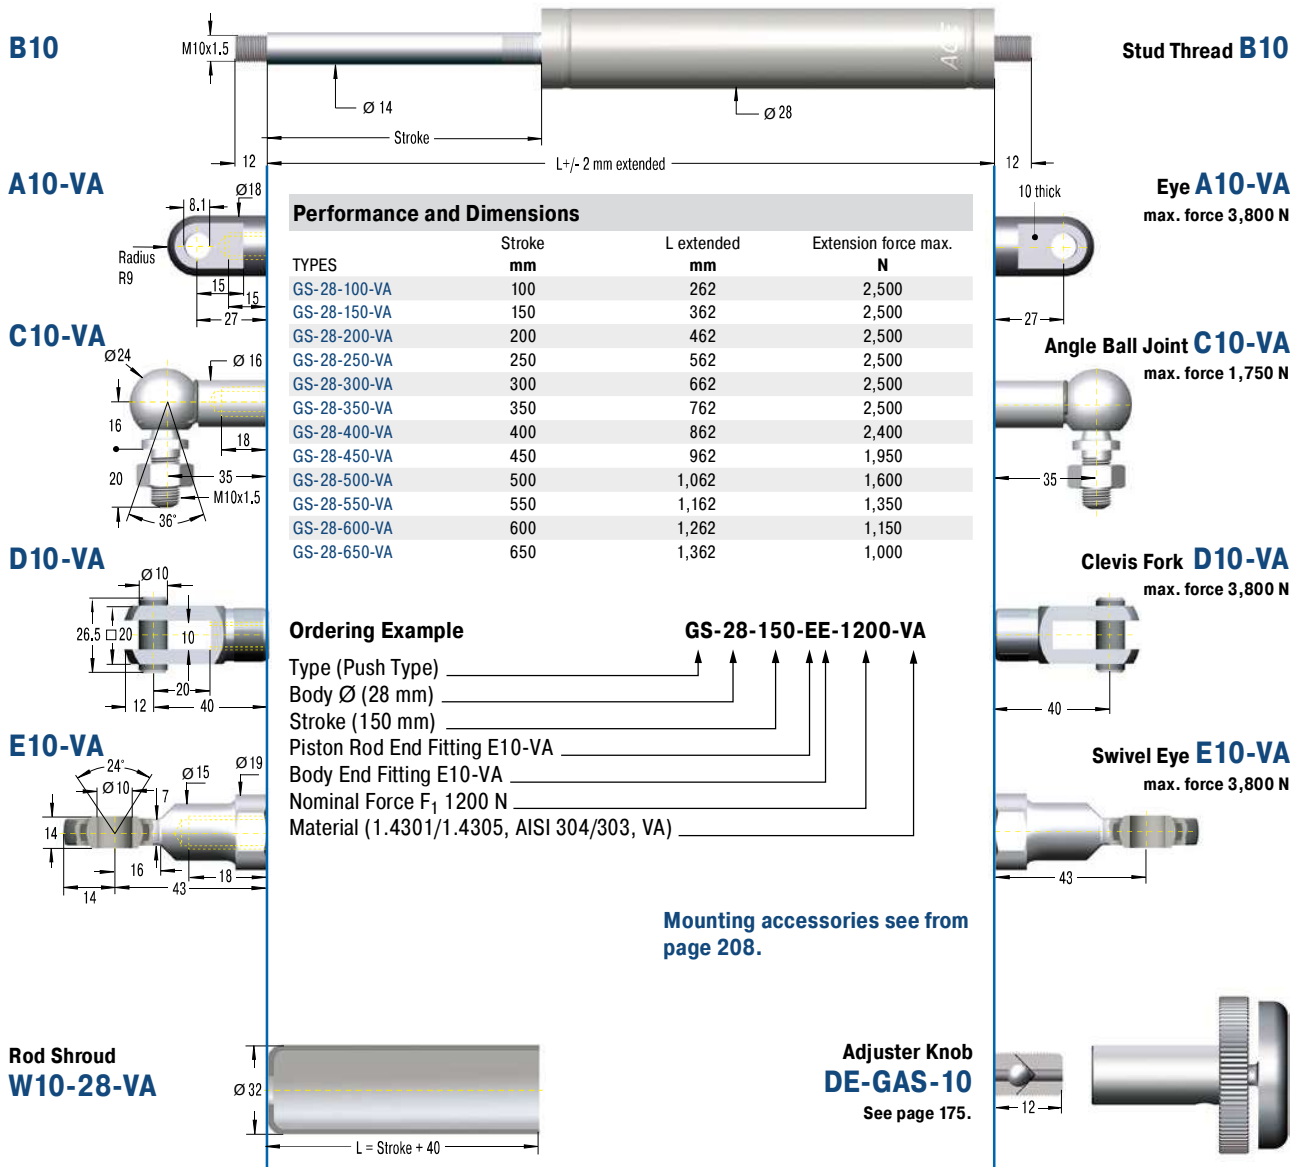

**Technical Data**

**Extension force:** 150 N to 2,500 N (compressed up to 3,975 N)

**Progression:** Approx. 53 % to 59 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 20 mm (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.



## End Fitting

## Standard Dimensions

## End Fitting

## B14

## Stud Thread B14

## A14-VA

## Eye A14-VA

max. force 7,000 N

## C14-VA

## Angle Ball Joint C14-VA

max. force 3,200 N

## D14-VA

## Clevis Fork D14-VA

max. force 7,000 N

## E14-VA

## Swivel Eye E14-VA

max. force 7,000 N

Rod Shroud  
W14-40-VAAdjuster Knob  
DE-GAS-14  
See page 175.

## Performance and Dimensions

TYPES	Stroke mm	L extended mm	Extension force max. N
GS-40-100-VA	100	317	5,000
GS-40-150-VA	150	417	5,000
GS-40-200-VA	200	517	5,000
GS-40-300-VA	300	717	5,000
GS-40-400-VA	400	917	5,000
GS-40-500-VA	500	1,117	5,000
GS-40-600-VA	600	1,317	4,150

## Ordering Example

Type (Push Type) \_\_\_\_\_  
 Body Ø (40 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting D14-VA \_\_\_\_\_  
 Body End Fitting D14-VA \_\_\_\_\_  
 Nominal Force  $F_1$  3500 N \_\_\_\_\_  
 Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

## GS-40-150-DD-3500-VA

Mounting accessories see from  
page 208.

## Technical Data

**Extension force:** 500 N to 5,000 N (compressed up to 7,100 N)

**Progression:** Approx. 34 % to 42 %

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel  
(1.4301/1.4305, AISI 304/303)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 30 mm  
(depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** Gas pressure springs should not be installed under pre-tension.

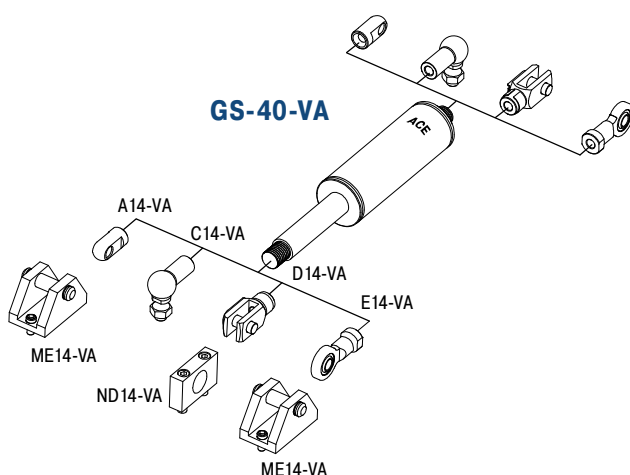

### Stainless Steel Gas Springs (Push Type), V4A

TYPES	Stroke mm	L extended mm	Dimensions see Page
GS-15-20-V4A	20	74	148
GS-15-40-V4A	40	114	148
GS-15-50-V4A	50	134	148
GS-15-60-V4A	60	154	148
GS-15-80-V4A	80	194	148
GS-15-100-V4A	100	234	148
GS-15-120-V4A	120	274	148
GS-15-150-V4A	150	334	148
GS-19-50-V4A	50	164	149
GS-19-100-V4A	100	264	149
GS-19-150-V4A	150	364	149
GS-19-200-V4A	200	464	149
GS-19-250-V4A	250	564	149
GS-19-300-V4A	300	664	149
GS-22-50-V4A	50	164	150
GS-22-100-V4A	100	264	150
GS-22-150-V4A	150	364	150
GS-22-200-V4A	200	464	150
GS-22-250-V4A	250	564	150
GS-22-300-V4A	300	664	150
GS-22-350-V4A	350	764	150
GS-22-400-V4A	400	864	150
GS-22-450-V4A	450	964	150
GS-22-500-V4A	500	1,064	150
GS-22-550-V4A	550	1,164	150
GS-22-600-V4A	600	1,264	150
GS-22-650-V4A	650	1,364	150
GS-22-700-V4A	700	1,464	150
GS-28-100-V4A	100	262	151
GS-28-150-V4A	150	362	151
GS-28-200-V4A	200	462	151
GS-28-250-V4A	250	562	151
GS-28-300-V4A	300	662	151
GS-28-350-V4A	350	762	151
GS-28-400-V4A	400	862	151
GS-28-450-V4A	450	962	151
GS-28-500-V4A	500	1,062	151
GS-28-550-V4A	550	1,162	151
GS-28-600-V4A	600	1,262	151
GS-28-650-V4A	650	1,362	151
GS-40-100-V4A	100	317	152
GS-40-150-V4A	150	417	152
GS-40-200-V4A	200	517	152
GS-40-300-V4A	300	717	152
GS-40-400-V4A	400	917	152
GS-40-500-V4A	500	1,117	152
GS-40-600-V4A	600	1,317	152

### Stainless Steel Accessories, V4A

TYPES	Dimensions see Page
A5-V4A	210
C5-V4A	210
D5-V4A	210
E5-V4A	210
G5-V4A	210
A8-V4A	211
C8-V4A	211
D8-V4A	211
E8-V4A	211
G8-V4A	212
A10-V4A	212
C10-V4A	212
D10-V4A	212
E10-V4A	212
A14-V4A	213
C14-V4A	213
D14-V4A	213
E14-V4A	213

## GST-40 Tandem

Optimised dual force for heavy flaps and wide angle applications

### Valve Technology


**Force range 300 N to 5,000 N**

**Stroke 50 mm to 400 mm**

Cover two differing force ranges: Tandem push type gas springs by ACE are maintenance-free and ready-to-install with two pressure tubes with different extension forces and progression curves. With this type of gas spring you cover the different force ranges between the start and end of an application. These force ranges are adjusted and compliment each other, designed individually for the relevant application by the free of charge ACE calculation service, then are specifically manufactured adjusted precisely to the required dynamics of the application.

The customer specific systems, for which there are many fitting parts, are specifically suitable for heavy loads with large opening angle and can also be delivered in stainless steel versions.

Tandem push type gas springs from ACE are used in industrial applications such as in mechanical engineering, in the automobile, electronics and furniture industries, but also in medical technology as well as for service hatches.

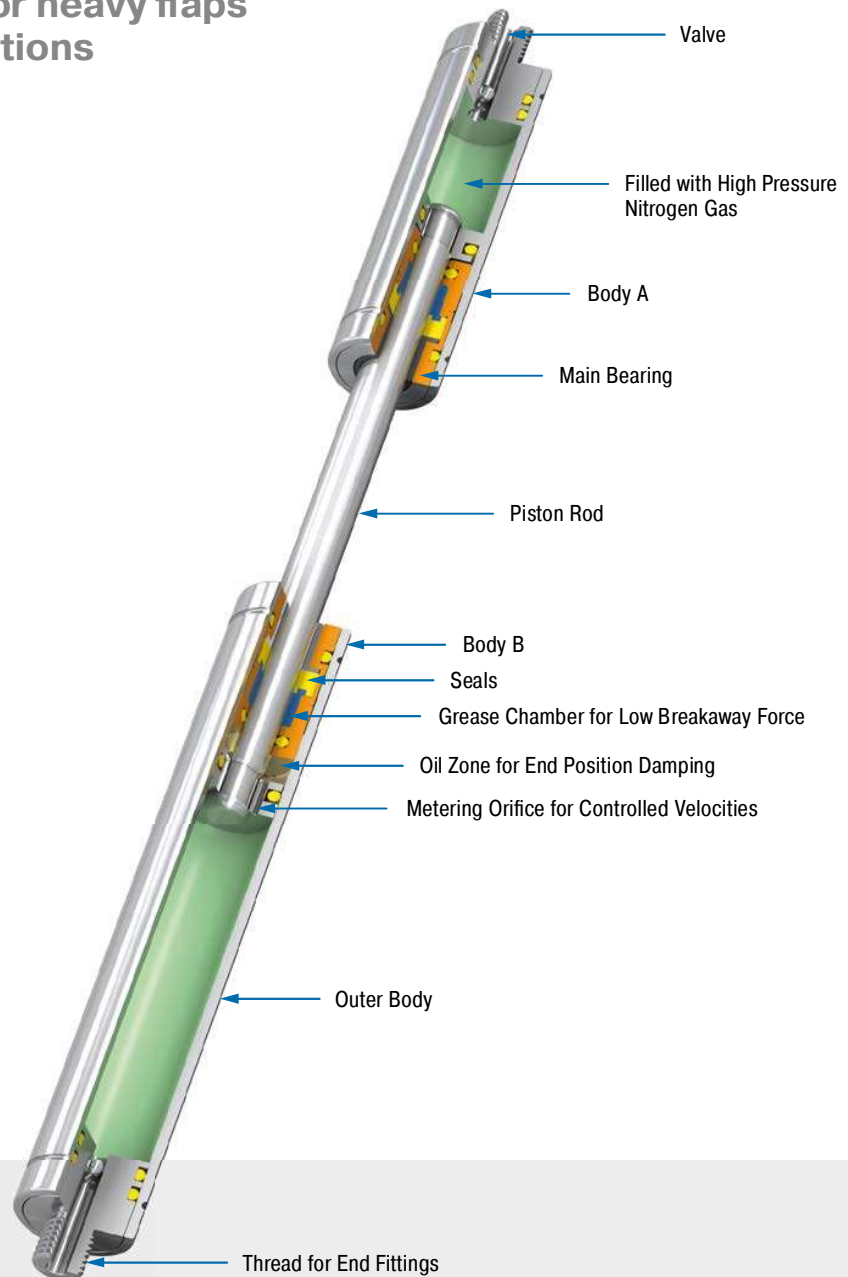

### Technical Data

**Extension force:** 300 N to 5,000 N

**Piston rod diameter:** Ø 20 mm

**Progression:** according to calculation relating to your application

**Lifetime:** Approx. 10,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel with wear-resistant coating

**Operating fluid:** nitrogen gas and oil

**Mounting:** in any position. Please adopt the mounting points determined by ACE.

**End position damping length:** Application-specific end position damping and extension speed.

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** hoods, shutters, machine housing, conveyor systems, folding elements, loading and lifting equipment

**Note:** These gas springs are tailored to the relevant application and are therefore not available ex stock.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories. Material 1.4301/1.4305, AISI 304/303 (V2A) and 1.4404/1.4571, AISI 316L/316Ti (V4A).




End Fitting

Standard Dimensions

End Fitting


A14

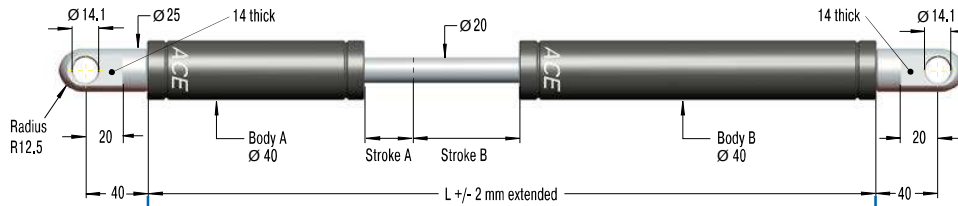

Eye A14

max. force 10,000 N

B14




Performance and Dimensions

TYPES	Stroke A mm	Stroke B mm	L extended mm	Extension force max. N
GST-40-50-100	50	100	485	5,000
GST-40-50-150	50	150	585	5,000
GST-40-50-200	50	200	685	5,000
GST-40-70-250	70	250	825	5,000
GST-40-70-300	70	300	925	5,000
GST-40-70-350	70	350	1,025	5,000
GST-40-70-400	70	400	1,125	5,000

Stud Thread B14


D14



Clevis Fork D14

max. force 10,000 N

E14



Swivel Eye E14

max. force 10,000 N


Ordering Example

GST-40-50-150-AD-900N-2500N

Type (Tandem Gas Spring) \_\_\_\_\_  
 Body Ø (40 mm) \_\_\_\_\_  
 Stroke A (50 mm) \_\_\_\_\_  
 Stroke B (150 mm) \_\_\_\_\_  
 Body A End Fitting, A14 \_\_\_\_\_  
 Body B End Fitting, D14 \_\_\_\_\_  
 Nominal Force Body A, 900 N \_\_\_\_\_  
 Nominal Force Body B, 2500 N \_\_\_\_\_

Mounting accessories see from  
page 200.

GST-40

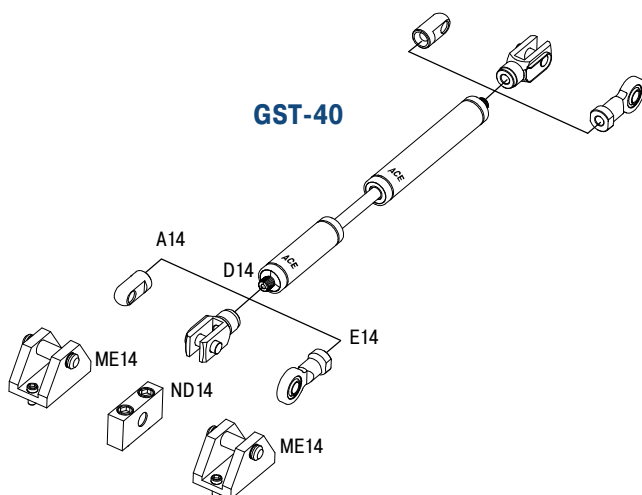

Technical Data

**Extension force:** 300 N to 5,000 N

**Progression:** according to calculation relating to your application

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel with wear-resistant coating

**Mounting:** in any position. Please adopt the mounting points determined by ACE.

**End position damping length:** Application-specific end position damping and extension speed.

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** These gas springs are tailored to the relevant application and are therefore not available ex stock.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

## Application Examples

### GS-12

#### Safe opening and closing

ACE industrial gas springs (push type) protect samples in an incubator, which is used for chemical and biochemical applications. The plexiglass hood, under which may be found valuable laboratory goods, is securely held open by two maintenance-free, ready-to-install ACE industrial gas springs (push type) of the type GS-12-60-AA-X. With an end-position damping of 5 mm and an extension force of 10 to 180 N, they help to handle the forces generated. The hood is always easily opened and remains in this position. It also remains securely shut when the incubator is in operation.

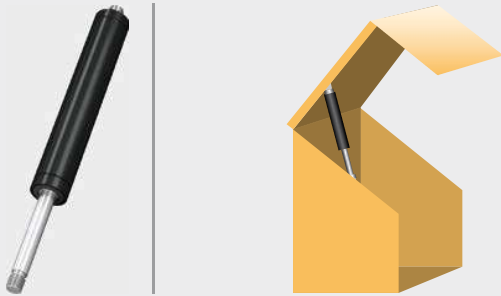


Very small ACE industrial gas springs (push type) enable careful opening and closing movements of a mini-incubator hood, under which may be found laboratory products

GFL Gesellschaft für Labortechnik mbH, 30938 Burgwedel, Germany

### GS-19

#### Doors open and close safely

ACE industrial gas springs make opening and closing doors of rescue helicopters easier. The maintenance-free, sealed systems are installed in the access doors of helicopters of the type EC 135. There, they allow the crew to enter or exit the helicopter quickly, thus contributing to enhanced safety. The GS-19-300-CC gas springs provide a defined retraction speed and secure engagement of the door lock. The integrated end position damper allows gentle closing of the door and saves wear and tear on the valuable, lightweight material.

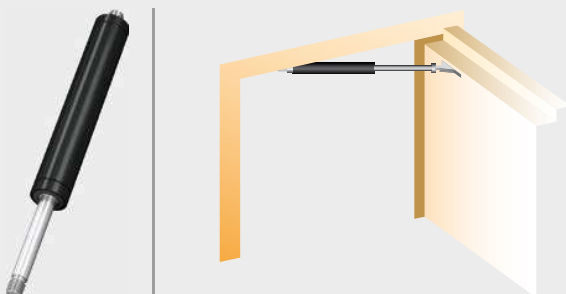


Industrial gas springs: For safe entry and exit

#### GS-22-VA

### Made-to-measure stainless steel gas springs

A special hygiene and toilet chair, designed for children and young people with disabilities, must be firmly lockable in the sit and tilt positions. The practical aid thereby provided for relatives and carers can be attributed to two lockable ACE industrial gas springs (push type) which were especially developed and manufactured for this application and operate on the basis of the so-called tilt-in-space function. This allows the chair to be tilted forwards and backwards and provides significantly more convenience for users and patients. In order to meet all hygiene requirements, the gas springs are constructed in stainless steel.

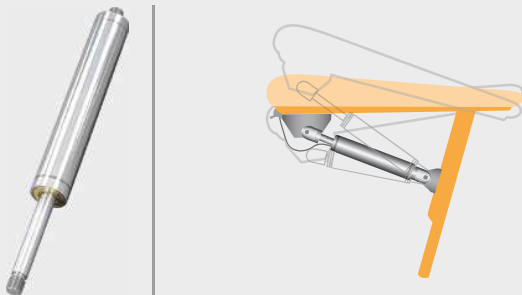

With inclination angles of 15 degrees to the front and rear, the ACE stainless steel gas springs facilitate the work of nurses  
Rifton Equipment, Rifton, New York 12471, USA

#### GST-40

### Tandem-operated large flaps securely under control

Underground distribution systems are visually advantageous. To facilitate their servicing, the heavy covers of the often large supply systems are brought back to the surface with the help of ACE industrial tandem gas springs (push type). This is quite easily achieved thanks to the use of two pressure pipes, the result of which is two different force ranges. This means filters must not endure laborious bending and a downward passage into the system of channels. In addition to these advantages, the springs benefit from their long service life and their capacity to be used, as stainless steel variants, in even the most hygienically-sensitive areas.



ACE industrial tandem gas springs (push type) enable easy maintenance of supply boxes by making the heavy flaps easier to operate  
Langmatz GmbH, 82467 Garmisch-Partenkirchen, Germany

## Industrial Gas Springs – Pull Type

### Takes over when things get too tight for gas pressure springs

If ACE gas push type springs cannot be used due to a lack of space, ACE's industrial gas pull type springs come into their own. The compact assistants with body diameters of 15 mm to 40 mm are effective in the direction of traction and work in the opposite way to the principle of gas push type springs.

This means that the gas pressure in the cylinder draws the piston rod in and, when closing a flap for example, supports the manual force with the pressure springs. ACE's gas pull type springs are also self-contained, maintenance-free machine elements and equipped with a standard valve to individually regulate the gas pressure, whereby they cover forces between 30 N and 5,000 N. Any installation position, extensive DIN standardised accessories and various models enable universal use.

Compact design

Individual filling valve technology

Calculation program for specific design

Universally applicable

Delivery time within 24 hours




## Function of a Gas Spring – Pull Type

Gas pull type springs work based on the reverse principle of a gas push type spring. They are also individually filled according to customer request to a certain pressure (traction force  $F_1$ ). However, the piston rod here is pulled inwards by the gas pressure in the cylinder. The higher the pressure, the greater the traction force.

The piston ring surface between the piston rod and the inner tube is decisive for the function. When the piston rod pulls out, the nitrogen from the piston is compressed in the inner tube. The force increase (progression) of the gas spring is due to the rising pressure. The force increase is almost linear.

### Calculation Principles

#### Force-Stroke Characteristics of Traction Gas Spring (Pull Type)



Free  
calculation service  
see page 172!

$F_1$  = nominal force at 20 °C  
(this is the pressure figure normally used when specifying the gas spring)

$F_2$  = force in the complete extended position

When extending the piston rod, there is an additional friction force caused by the contact pressure of the seals (this **only** occurs **during the extension stroke**):

$F_3$  = force at the beginning of the extension stroke

$F_4$  = force at the end of the extension stroke

#### Gas Springs (Pull Type)

TYPES	Progression approx. %	<sup>1</sup> Friction $F_R$ approx. in N
GZ-15	12 - 22 <sup>2</sup>	55 - 140
GZ-19	21 - 28 <sup>2</sup>	20 - 40
GZ-28	28 - 30 <sup>2</sup>	100 - 200
GZ-40	43 - 45 <sup>2</sup>	

<sup>1</sup> Depending on the filling force

<sup>2</sup> Depending on the stroke

**Progression:** (the slope of the force line in the diagram above) is due to the reduction of the internal gas volume as the piston rod moves from its initial position to its fully stroked position. The approx. progression values given above for standard springs can be altered on request.

**Effect of temperature:** The nominal  $F_1$  figure is given at 20 °C. An increase of 10 °C will increase force by 3.4 %.

**Filling tolerances:** -20 N to +40 N or 5 % to 7 %. Depending on size and traction force the tolerances can differ.

## Industrial Gas Springs – Pull Type



### GZ-15 to GZ-40

Valve Technology

**Very low progression rate**

Hoods, Shutters, Machine housing, Conveyor systems

Page 160

### GZ-15-V4A to GZ-40-VA

Valve Technology, Stainless Steel

**Very low progression rate with FDA approval**

Hoods, Shutters, Machine housing, Conveyor systems

Page 166



## GZ-15 to GZ-40

### Very low progression rate


#### Valve Technology

**Traction force range 40 N to 5,000 N**  
**Stroke 20 mm to 650 mm**

The solution to a lack of space: If standard push type gas springs cannot be used due to a lack of space, ACE's industrial pull type gas springs come into their own. They work in the opposite way to standard push type gas springs. The piston rod is retracted when the cylinder is unloaded. The gas pressure in the cylinder draws the piston rod in.

ACE pull type gas springs offer the maximum service life thanks to the solid chrome-plated piston rod and an integrated sliding bearing. The maintenance-free and ready-to-install products are available in body diameters of 15 to 40 mm as well as forces from 40 to 5,000 N and are available from stock with valve and large selection of accessories. The traction force can be subsequently adjusted using the valve.

Gas traction springs from ACE are used in industrial applications, especially in mechanical engineering and in medical technology as well as in the electronics and furniture industries.

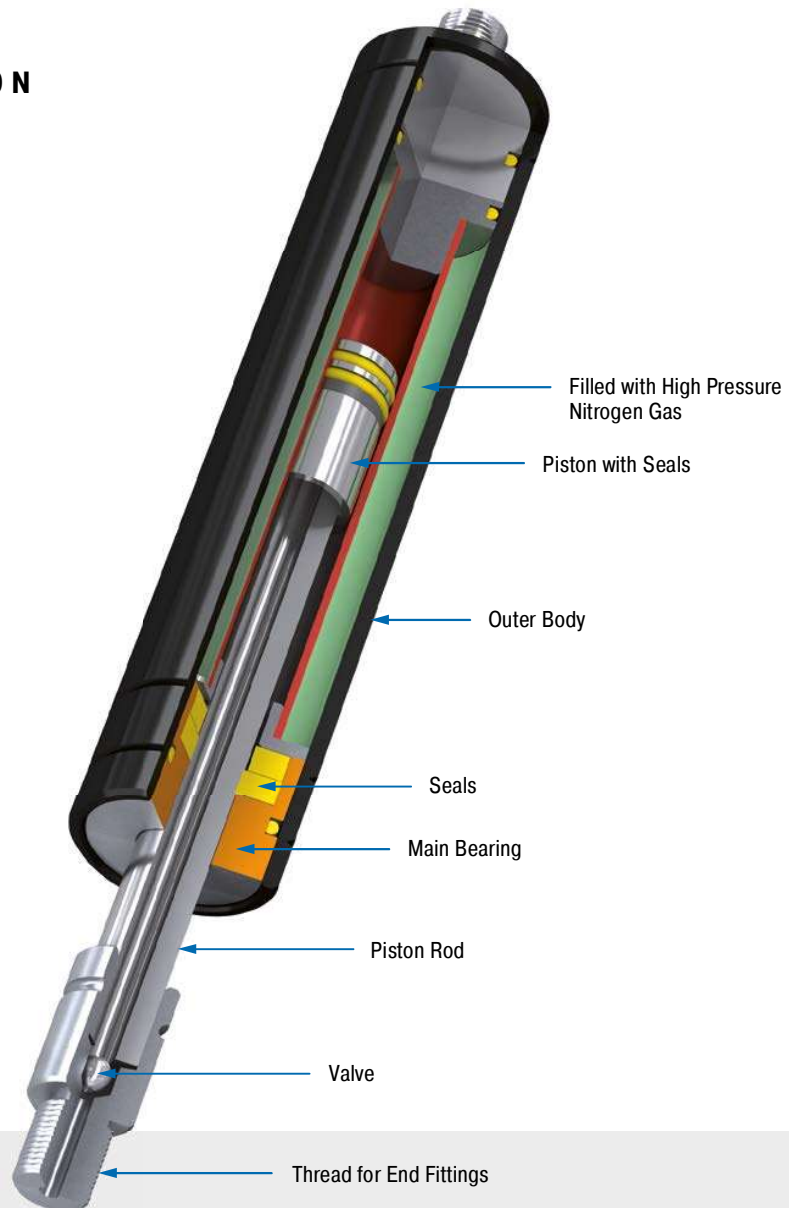

#### Technical Data

**Traction force:** 40 N to 5,000 N

**Piston rod diameter:** Ø 4 mm to Ø 28 mm

**Progression:** approx. 12 % to 45 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel or stainless steel with wear-resistant coating

**Operating fluid:** nitrogen gas

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** hoods, shutters, machine housing, conveyor systems, control boxes, furniture industry, shipbuilding, assembly stations, vehicle technology, folding elements

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


**On request:** Special oils and other special options. Alternative accessories. Traction gas springs with end position damping also available on request.

End Fitting

Standard Dimensions

End Fitting


A3.5

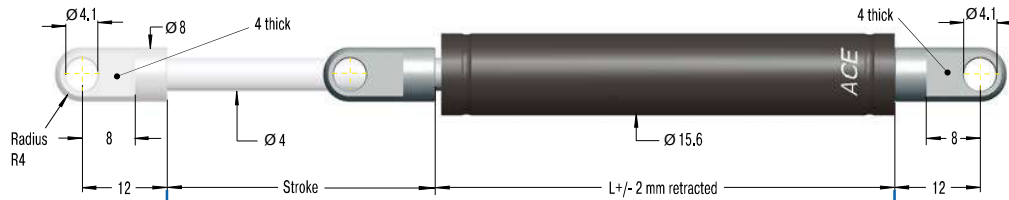

Eye A3.5  
max. force 370 N

B3.5

C3.5




Performance and Dimensions

TYPES	Stroke mm	L retracted mm	Traction force max. N
GZ-15-20	20	87	150
GZ-15-40	40	107	150
GZ-15-50	50	117	150
GZ-15-60	60	127	150
GZ-15-80	80	147	150
GZ-15-100	100	167	150
GZ-15-120	120	187	150
GZ-15-150	150	217	150

Stud Thread B3.5


Angle Ball Joint C3.5  
max. force 370 N

D3.5




Clevis Fork D3.5  
max. force 370 N

E3.5



Swivel Eye E3.5  
max. force 370 N

G3.5



Ball Socket G3.5  
max. force 370 N


Ordering Example

GZ-15-150-AC-150  
Type (Pull Type) \_\_\_\_\_  
Body Ø (15.6 mm) \_\_\_\_\_  
Stroke (150 mm) \_\_\_\_\_  
Piston Rod End Fitting A3.5 \_\_\_\_\_  
Body End Fitting C3.5 \_\_\_\_\_  
Traction Force F<sub>1</sub> 150 N \_\_\_\_\_

Mounting accessories see from  
page 200.

Adjuster Knob  
DE-GAS-3.5  
See page 175.

GZ-15

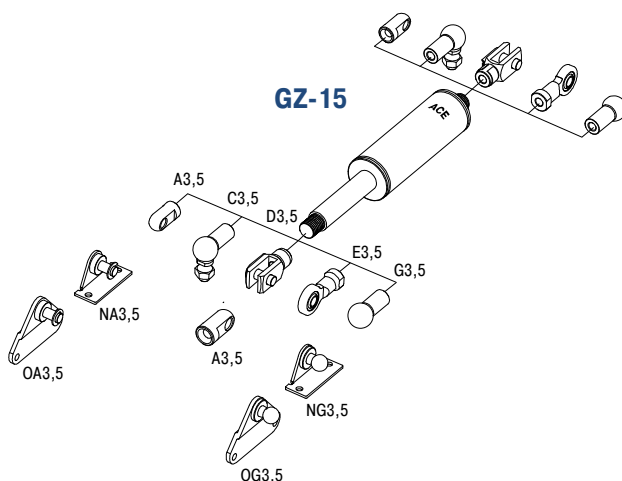

Technical Data

**Traction force:** 50 N to 150 N (extended up to 183 N)

**Progression:** Approx. 12 % to 22 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

## End Fitting

## Standard Dimensions


## End Fitting

A8

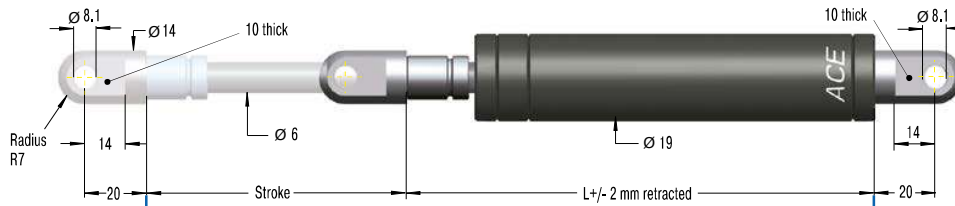

**Eye A8**  
 max. force 3,000 N

B8


C8


**Stud Thread B8**
**Angle Ball Joint C8**  
 max. force 1,200 N


D8


**Clevis Fork D8**  
 max. force 3,000 N

E8


**Swivel Eye E8**  
 max. force 3,000 N

G8


**Ball Socket G8**  
 max. force 1,200 N

## Performance and Dimensions

TYPES	Stroke mm	L retracted mm	Traction force max. N
GZ-19-30	30	112	350
GZ-19-50	50	132	350
GZ-19-100	100	182	350
GZ-19-150	150	232	350
GZ-19-200	200	282	350
GZ-19-250	250	332	350


## Ordering Example

GZ-19-150-AC-250


Type (Pull Type) \_\_\_\_\_  
 Body Ø (19 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting C8 \_\_\_\_\_  
 Traction Force  $F_1$  250 N \_\_\_\_\_

 Mounting accessories see from  
 page 200.

## Rod Shroud W8-19


 Adjuster Knob  
 DE-GAS-8

See page 175.

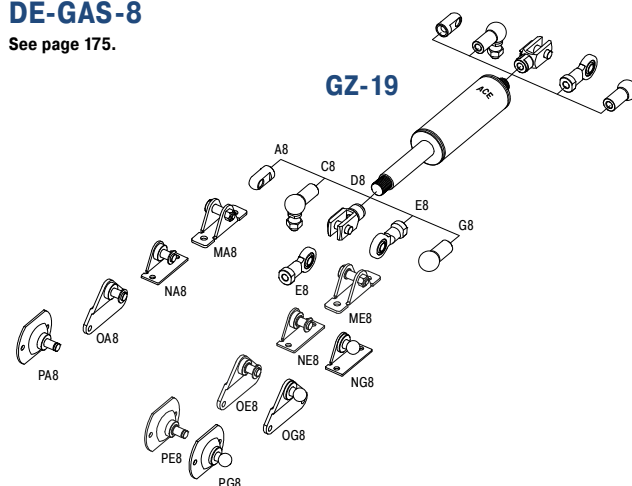

## Technical Data

**Traction force:** 40 N to 350 N (extended up to 448 N)

**Progression:** Approx. 21 % to 28 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel with wear-resistant coating

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.




End Fitting

Standard Dimensions

End Fitting


A10

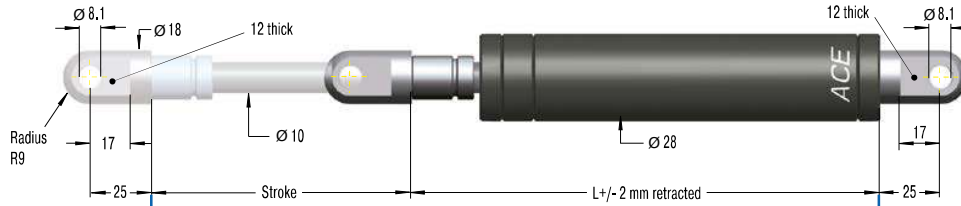

Eye A10


max. force 10,000 N

B10



Stud Thread B10


C10



Angle Ball Joint C10

max. force 1,800 N


D10



Clevis Fork D10

max. force 10,000 N

E10



Swivel Eye E10

max. force 10,000 N

Performance and Dimensions

TYPES	Stroke mm	L retracted mm	Traction force max. N
GZ-28-30	30	130	1,200
GZ-28-50	50	150	1,200
GZ-28-100	100	200	1,200
GZ-28-150	150	250	1,200
GZ-28-200	200	300	1,200
GZ-28-250	250	350	1,200
GZ-28-300	300	400	1,200
GZ-28-350	350	450	1,200
GZ-28-400	400	500	1,200
GZ-28-450	450	550	1,200
GZ-28-500	500	600	1,200
GZ-28-550	550	650	1,200
GZ-28-600	600	700	1,200
GZ-28-650	650	750	1,200


Ordering Example

Type (Pull Type) \_\_\_\_\_  
Body Ø (28 mm) \_\_\_\_\_  
Stroke (150 mm) \_\_\_\_\_  
Piston Rod End Fitting E10 \_\_\_\_\_  
Body End Fitting E10 \_\_\_\_\_  
Traction Force  $F_1$  800 N \_\_\_\_\_

GZ-28-150-EE-800

Mounting accessories see from  
page 200.

Rod Shroud W10-28



Adjuster Knob  
DE-GAS-10  
See page 175.

GZ-28

Technical Data

**Traction force:** 150 N to 1,200 N (extended up to 1,560 N)

**Progression:** Approx. 28 % to 30 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C


**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel with wear-resistant coating

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

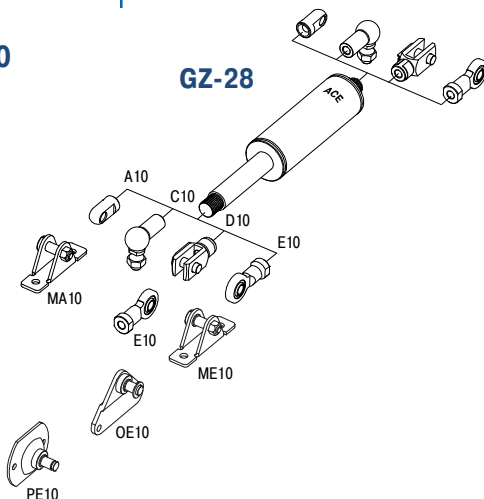


## End Fitting

## Standard Dimensions

## End Fitting

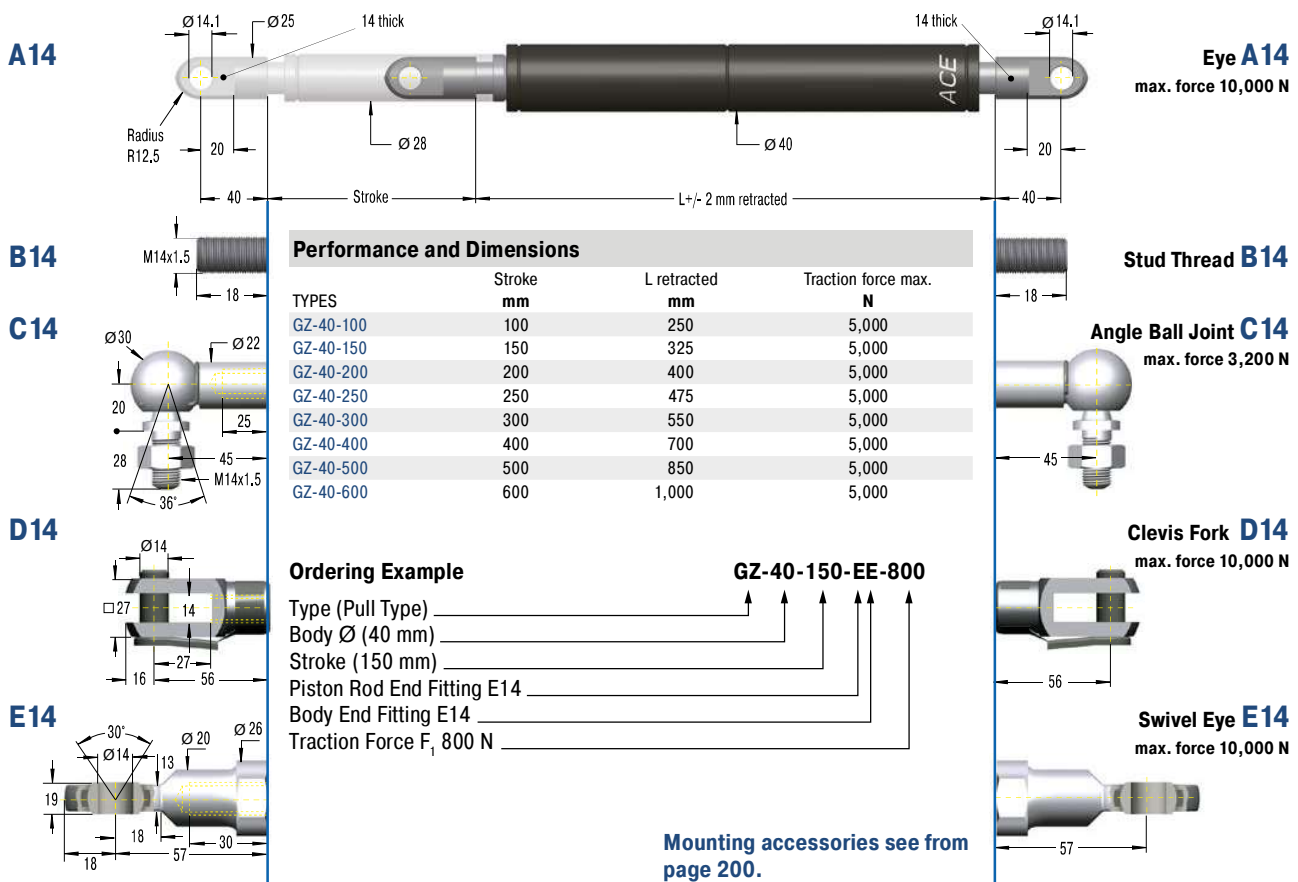

## Rod Shroud W14-40



**Adjuster Knob**  
**DE-GAS-14**  
 See page 175.

## GZ-40

## Technical Data

**Traction force:** 500 N to 5,000 N (extended up to 7,250 N)

**Progression:** Approx. 43 % to 45 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, End fittings: zinc plated steel; Piston rod: steel with wear-resistant coating

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

# ACE Digital Tools



For more information  
about the calculation  
service see page 172!

## Print catalogue? Everyone can. ACE offers more:

- ▶ Downloads: Product information in many languages
- ▶ PC calculation software & online calculation service
- ▶ Extensive CAD component libraries
- ▶ ACE-YouTube-Channel with video tips
- ▶ VibroChecker – awarded free iPhone App

**All information on our Website: [www.ace-ace.com](http://www.ace-ace.com)**

## GZ-15-V4A to GZ-40-VA

Very low progression rate with FDA approval

**Valve Technology, Stainless Steel**


**Traction force range 40 N to 5,000 N**

**Stroke 20 mm to 600 mm**

Brilliant performance when things become tight: For specific use e.g. in tough surroundings or small spaces, the broad spectrum of ACE industrial pull type gas springs made of stainless steel with body diameters from 15 mm to 40 mm supplements the comprehensive programme of the ACE industrial pull type gas springs with valves.

This high quality design is rust free and is more robust against environmental impact compared with standard gas pull type springs. These stainless steel gas springs are also optically appealing, very durable and available, upon request, in many stroke lengths and are also possible in many traction forces in combination with the suitable stainless steel accessories.

ACE industrial push type springs made of stainless steel are used in industries such as the chemical and food industry, in automobiles, plant engineering and shipbuilding and also in medical, military, environmental and water supply technology.

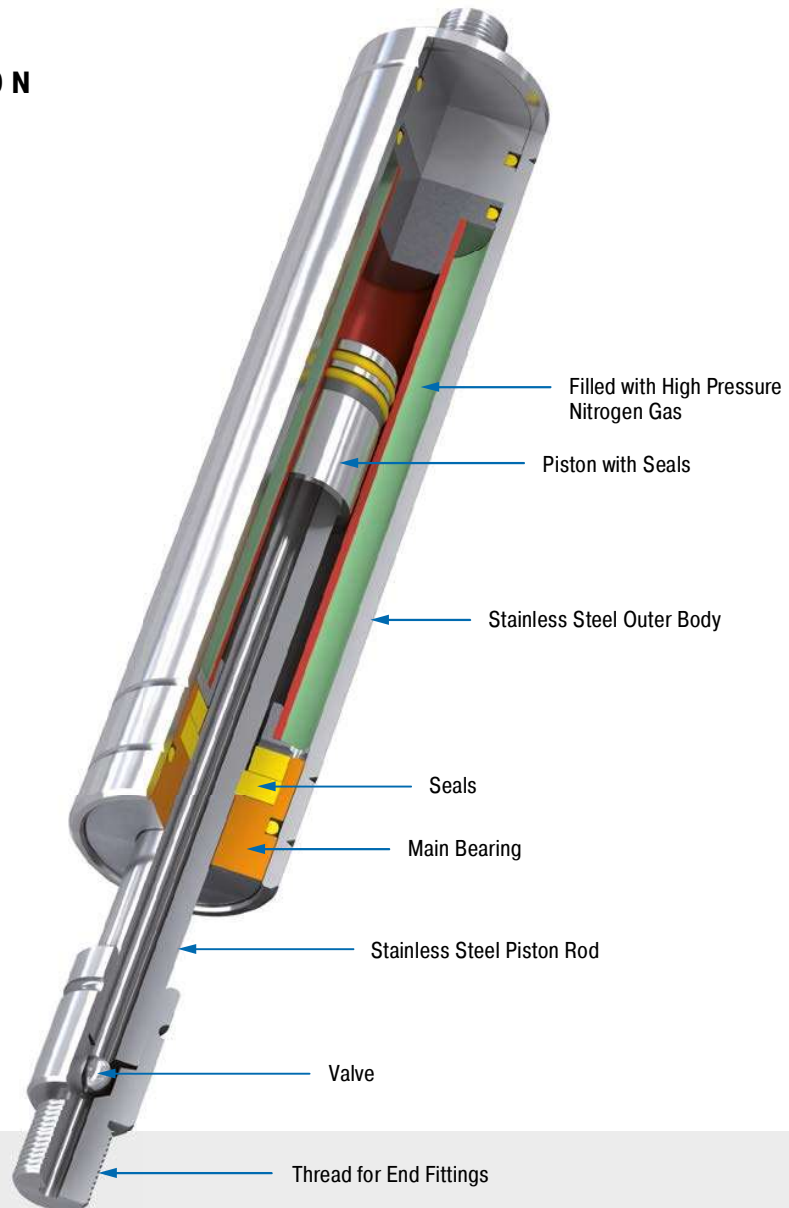

### Technical Data

**Traction force:** 40 N to 5,000 N

**Piston rod diameter:** Ø 4 mm to Ø 28 mm

**Progression:** approx. 11 % to 45 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303 and 1.4404/1.4571, AISI 316L/316Ti)

**Operating fluid:** nitrogen gas

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.

**Application field:** hoods, shutters, machine housing, conveyor systems, control boxes, furniture industry, shipbuilding, food industry, pharmaceutical industry, folding elements


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories. Traction gas springs with end position damping also available on request. Other traction gas springs material 1.4404/1.4571, AISI 316L/316Ti (V4A) available on request.

End Fitting

Standard Dimensions

End Fitting

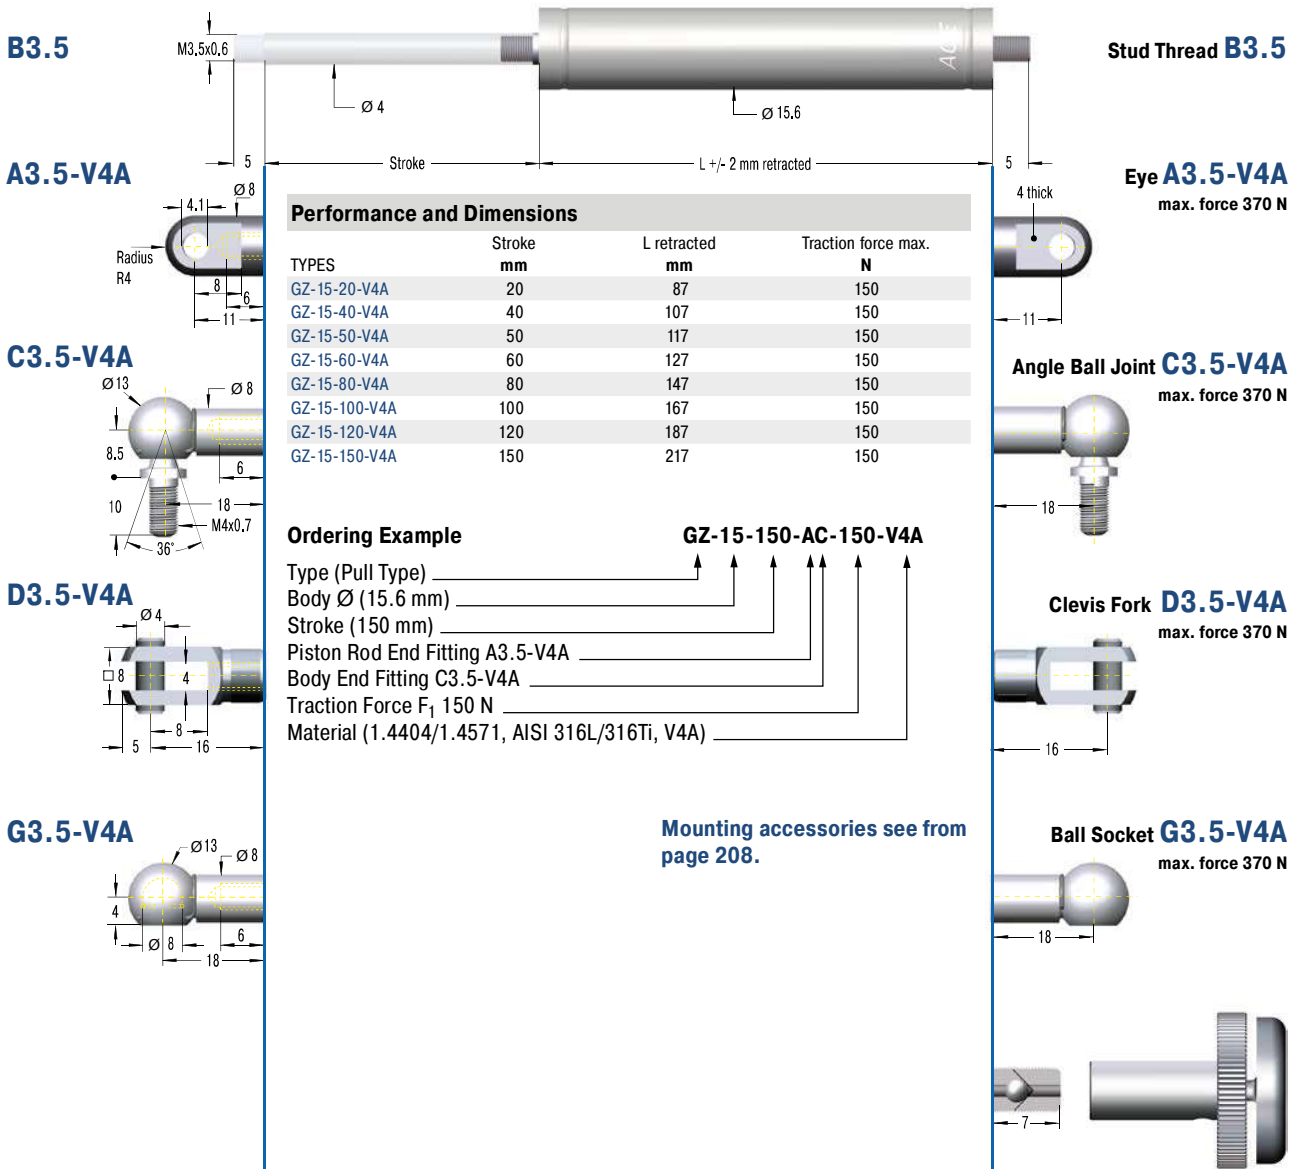

GZ-15-V4A

Technical Data

**Traction force:** 50 N to 150 N (extended up to 182 N)

**Progression:** Approx. 11 % to 21 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4404/1.4571, AISI 316L/316Ti)

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.



## End Fitting

## Standard Dimensions

## End Fitting

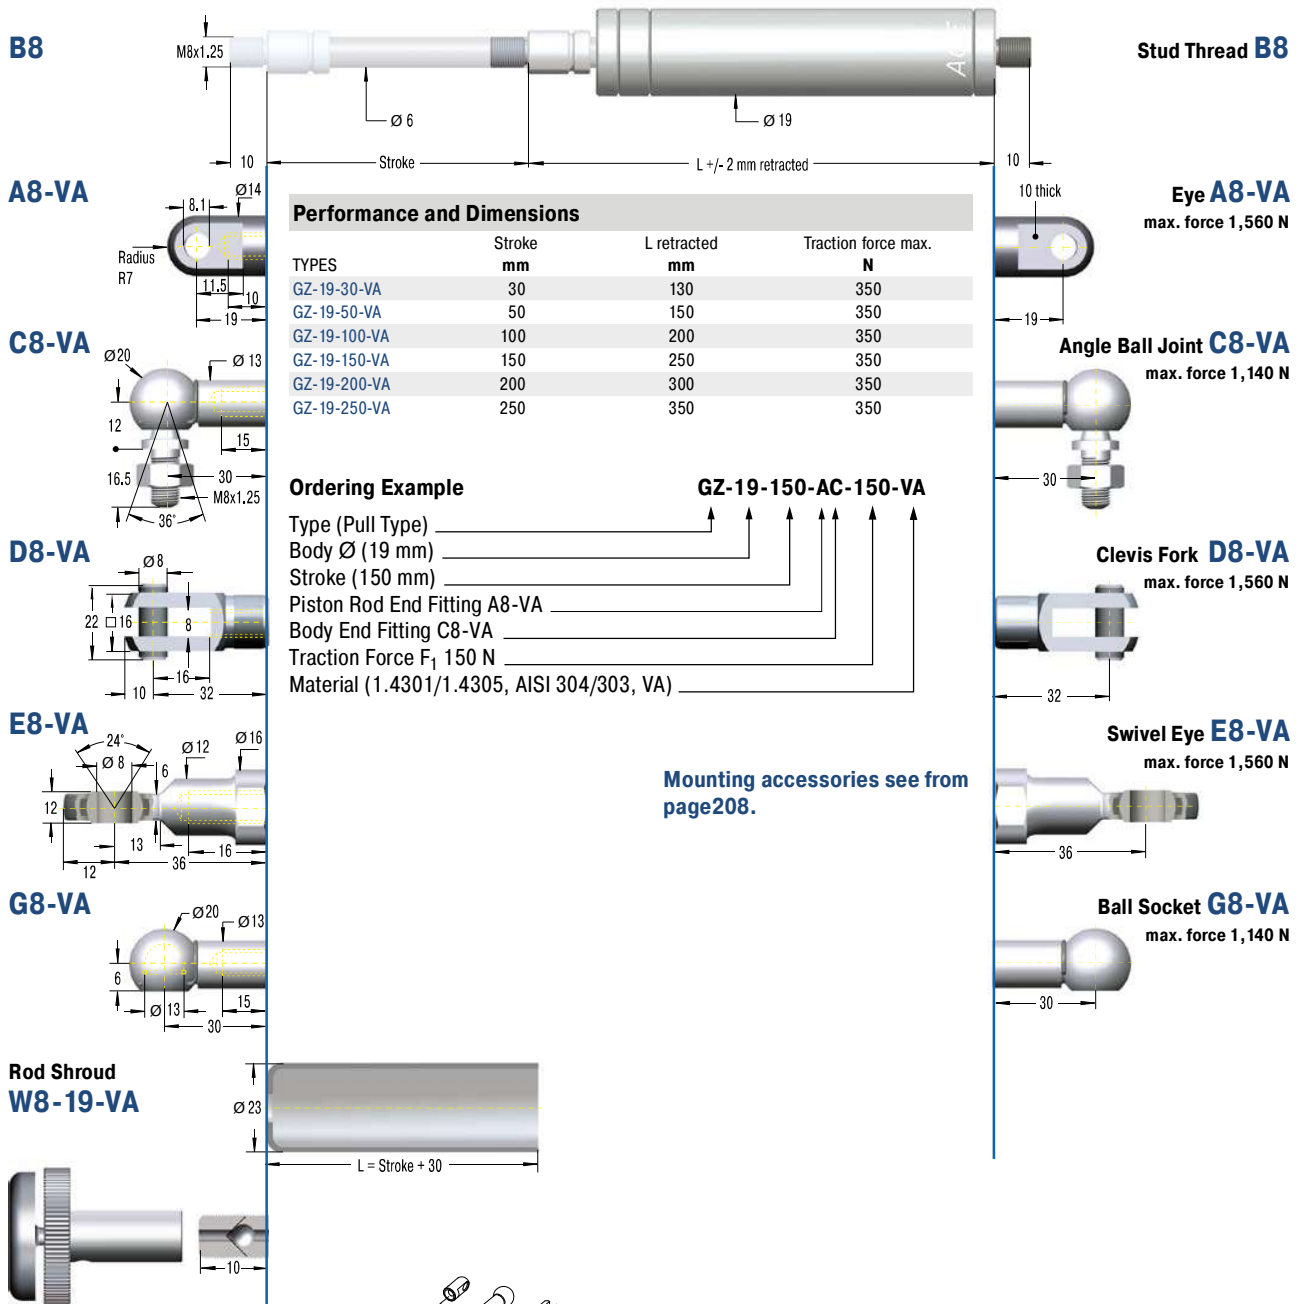
**Adjuster Knob**  
**DE-GAS-8**

See page 175.

## GZ-19-VA

## Technical Data


**Traction force:** 40 N to 350 N (extended up to 448 N)**Progression:** Approx. 23 % to 28 %**Lifetime:** Approx. 2,000 m**Operating temperature range:** -20 °C to +80 °C**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303)**Mounting:** with piston rod upwards**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).**Positive stop:** External positive stop in the pulling direction provided by the customer.**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.



End Fitting

Standard Dimensions

End Fitting

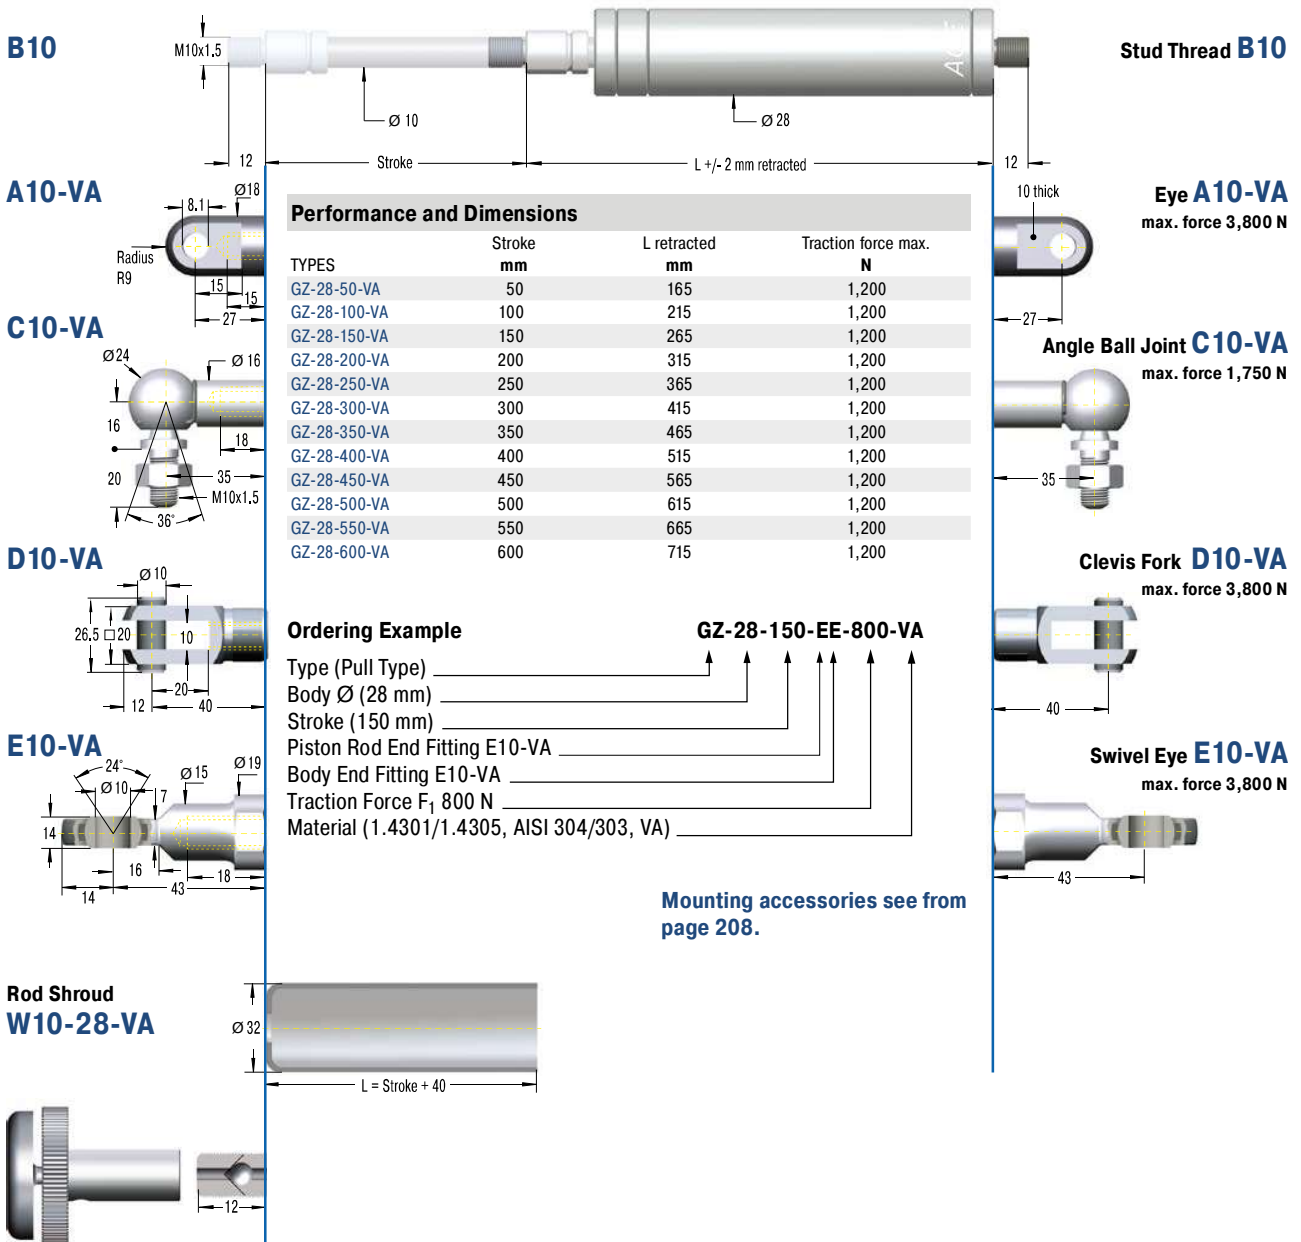

Adjuster Knob  
**DE-GAS-10**  
See page 175.

**GZ-28-VA**

**Technical Data**

**Traction force:** 150 N to 1,200 N (extended up to 1,560 N)

**Progression:** Approx. 29 % to 30 %

**Lifetime:** Approx. 2,000 m

**Operating temperature range:** -20 °C to +80 °C

**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** with piston rod upwards

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

## End Fitting

## Standard Dimensions

## End Fitting

B14

Stud Thread B14

A14-VA

Eye A14-VA  
max. force 7,000 N

C14-VA

Angle Ball Joint C14-VA  
max. force 3,200 N

D14-VA

Clevis Fork D14-VA  
max. force 7,000 N

E14-VA

Swivel Eye E14-VA  
max. force 7,000 NRod Shroud  
W14-40-VA

## Performance and Dimensions

TYPES	Stroke mm	L retracted mm	Traction force max. N
GZ-40-100-VA	100	250	5,000
GZ-40-150-VA	150	325	5,000
GZ-40-200-VA	200	400	5,000
GZ-40-250-VA	250	475	5,000
GZ-40-300-VA	300	550	5,000
GZ-40-400-VA	400	700	5,000
GZ-40-500-VA	500	850	5,000
GZ-40-600-VA	600	1,000	5,000

## Ordering Example

Type (Pull Type) \_\_\_\_\_  
 Body Ø (40 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E14-VA \_\_\_\_\_  
 Body End Fitting E14-VA \_\_\_\_\_  
 Traction Force  $F_1$  800 N \_\_\_\_\_  
 Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

GZ-40-150-EE-800-VA

 Mounting accessories see from  
 page 208.

 Adjuster Knob  
**DE-GAS-14**  
 See page 175.

GZ-40-VA

## Technical Data

**Traction force:** 500 N to 5,000 N (extended up to 7,250 N)**Progression:** Approx. 43 % to 45 %**Lifetime:** Approx. 2,000 m**Operating temperature range:** -20 °C to +80 °C**Material:** Outer body, Piston rod, End fittings: stainless steel (1.4301/1.4305, AISI 304/303)**Mounting:** with piston rod upwards**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).**Positive stop:** External positive stop in the pulling direction provided by the customer.**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

### Stainless Steel Gas Springs (Pull Type), V4A

TYPES	Stroke mm	L retracted mm	Dimensions see Page
GZ-19-30-V4A	30	130	168
GZ-19-50-V4A	50	150	168
GZ-19-100-V4A	100	200	168
GZ-19-150-V4A	150	250	168
GZ-19-200-V4A	200	300	168
GZ-19-250-V4A	250	350	168
GZ-28-50-V4A	50	165	169
GZ-28-100-V4A	100	215	169
GZ-28-150-V4A	150	265	169
GZ-28-200-V4A	200	315	169
GZ-28-250-V4A	250	365	169
GZ-28-300-V4A	300	415	169
GZ-28-350-V4A	350	465	169
GZ-28-400-V4A	400	515	169
GZ-28-450-V4A	450	565	169
GZ-28-500-V4A	500	615	169
GZ-28-550-V4A	550	665	169
GZ-28-600-V4A	600	715	169
GZ-40-100-V4A	100	250	170
GZ-40-150-V4A	150	325	170
GZ-40-200-V4A	200	400	170
GZ-40-250-V4A	250	475	170
GZ-40-300-V4A	300	550	170
GZ-40-400-V4A	400	700	170
GZ-40-500-V4A	500	850	170
GZ-40-600-V4A	600	1,000	170

### Stainless Steel Accessories, V4A

TYPES	Dimensions see Page
A5-V4A	210
C5-V4A	210
D5-V4A	210
E5-V4A	210
G5-V4A	210
A8-V4A	211
C8-V4A	211
D8-V4A	211
E8-V4A	211
G8-V4A	212
A10-V4A	212
C10-V4A	212
D10-V4A	212
E10-V4A	212
A14-V4A	213
C14-V4A	213
D14-V4A	213
E14-V4A	213

## Free Calculation Offer for Industrial Gas Springs

### With all necessary information for installation

To obtain the optimum operation with minimal hand force, the gas spring must be properly sized and the mounting points have to be optimally placed.

It is important to identify the following points:

- gas spring size
- required gas spring stroke
- mounting points on flap and frame
- extended length of the gas spring
- required extension force
- hand forces throughout the complete movement on the flap

With our free calculation service you can eliminate the time-consuming calculation and send us your details by fax or e-mail. Just complete the information shown on the following page. Please attach a sketch of your application (a simple hand sketch is sufficient) in side view. Our application engineers will determine the optimum gas springs and mounting points and calculate the ideal situation to satisfy your requirements.

You will receive a quotation showing the opening and closing forces and our recommended mounting points to suit your application.

**NEW!**  
 Also try our  
 Online Calculation Service:  
[www.ace-ace.com](http://www.ace-ace.com)

### Example of a Calculation Offer


Input data		Identification data	
Start angle	$\alpha M$ : 270 °	Temperature	: 20 °C
Open angle	$\alpha$ : 105 °	Progression	: 42 %
Rd. ctr. grvty.	RM: 410 mm	Friction	: 30 N
Mass	m: 12 kg	Ext. length	: 504 mm
No. gas springs	n: 2		
Radius handforce RH:	820 mm		

#### Required user hand-forces

F1-F2/F3-F4=Hand forces for opening/closing

Angle [°]	F1-F2 [N]	F3-F4 [N]	Length [mm]
270	-13	-14	311
293	37	42	323
317	59	68	363
340	53	63	418
363	34	44	477
375	25	34	504

F1-F4 positive requires clockwise hand force  
 F1-F4 negative requires counter-clockwise hand force

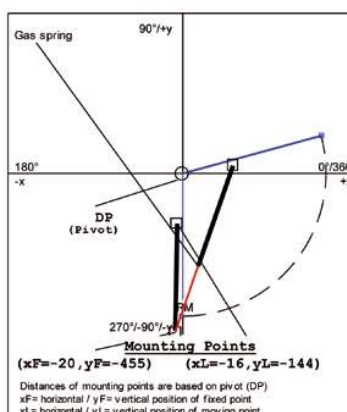

## Input Data

Gas Spring Push type ☐ Gas Spring Pull type ☐

### Gas spring fixing points

The fixed point of the frame and the moving point of the flap are critical for the optimum operation.

Therefore please attach a sketch of your application!  
(A few lines with their dimensions are sufficient)

Moving mass\* m \_\_\_\_\_ kg  
Number of gas springs in parallel\* n \_\_\_\_\_ pcs  
Number of movements\* \_\_\_\_\_ / day  
Ambient temperature T \_\_\_\_\_ °C








### If not shown by the sketch:

Radius of centre of gravity  $R_M$  \_\_\_\_\_ mm  
Radius of hand force  $R_H$  \_\_\_\_\_ mm  
Starting angle  $\alpha_M$  \_\_\_\_\_ °  
Opening angle  $\alpha$  \_\_\_\_\_ °

\* Compulsory information

## Desired Mounting Fittings


### End Fitting

<input type="checkbox"/> A		A <input type="checkbox"/>
<input type="checkbox"/> B		B <input type="checkbox"/>
<input type="checkbox"/> C		C <input type="checkbox"/>
<input type="checkbox"/> D		D <input type="checkbox"/>
<input type="checkbox"/> E		E <input type="checkbox"/>
<input type="checkbox"/> F		F <input type="checkbox"/>
<input type="checkbox"/> G		G <input type="checkbox"/>


The end fittings are interchangeable

e. g. -CE: C = Angle Ball Joint, E = Swivel Eye

### Hood

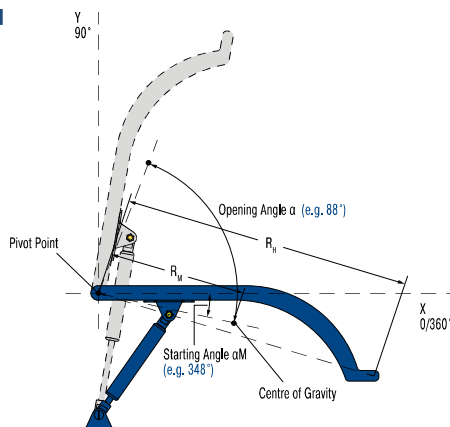

### Flap

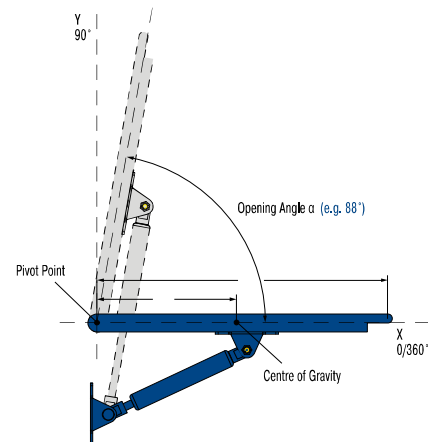

Please send us a sketch with dimensions of your application!  
Without this sketch we won't be able to calculate.

Comments	
Requirement per year	
Machine type / reference	

### Sender

Company		Dept.	
Address		Name	
ZIP / City		Telephone	
Internet		E-Mail	

Please copy, complete and fax with attached sketch to: +49 (0)2173 - 9226-89

## Mounting and Safety Instructions

### Filling

Gas springs are filled with pure nitrogen gas. Nitrogen is an inert gas that does not burn or explode and is not poisonous. The internal pressure of gas springs can be up to 300 bar. Do not attempt to open or modify them!

### Gas springs are maintenance-free!

ACE gas springs will operate in surrounding temperatures from -20 °C to +80 °C.

We can equip our springs with special seals to withstand temperatures as low as -45 °C or as high as +200 °C.

Gas springs should not be placed over heat or in open fire!

ACE gas springs can be stored in any position. Pressure lost through long storage is not to be expected. There are no known negative values, but there may be a sticking effect the first time you compress a spring. This may require a higher initial force to operate the gas spring for the first time (initial breakaway force).

### Mounting

Gas springs should be installed with the piston rod downwards. This position ensures best damping quality. ACE gas springs include an integrated grease chamber which allows for alternative mounting opportunities.

The tolerance for the installation length is generally deemed to be  $\pm 2$  mm. If very high demands are placed on durability and stability, please avoid the combination of small diameter + long stroke + high force.

The filling tolerance is -20 N to 40 N or 5 % to 7 %. Depending on size and extension force the tolerances can differ.

### Life Time

Generally, ACE gas springs are tested to 70,000 to 100,000 complete strokes. This is equivalent to the seal lifetime (depending on model size) to a distance travelled of 10 km (lifetime of traction gas springs approx. 2 km). During these tests the gas spring must not lose more than 5 % of its pressure. Depending upon the application and operating environment, the service life of these gas springs may be much longer. In practice 500,000 strokes or more have been achieved on some applications.

### Disposal/Recycling

Please ask for our disposal recommendations.

## Warnings and Liability

All gas springs are marked with the part number, the production date and a warning sign "Do not open high pressure".

We are not responsible for any damages of any kind that arises due to goods that are not marked accordingly.



## Valve Actuation with ACE DE-GAS

### Simple, safe and reliable

#### De-gassing for controlled force reduction on valve gas springs

The reduction is made by screwing the DE-Gas on the male screwed end of the gas spring. The drain process is possible through light actuation of the push button. If too much nitrogen is discharged, the gas spring can be refilled by ACE.

#### Adjustment

1. Hold gas spring valve up.
2. Insert DE-GAS adjuster knob on thread of the valve.
3. Press the DE-GAS adjuster knob with light hand force until you can hear the nitrogen escaping. Press only briefly to avoid too much nitrogen being discharged.
4. After adjustment, remove the DE-GAS adjuster knob, mount the end fittings and test the gas spring in your application. If necessary repeat the procedure.

If you use 2 gas springs in parallel, both gas springs should have the same force to avoid bending forces or side load on the application. If necessary return to ACE to refill both gas springs to the same (average) force.

If too much nitrogen is discharged, the units can be returned to ACE for re-gassing.



**DE-GAS**

You can also visit our Youtube channel at [www.youtube.com/user/acecontrolsglobal](http://www.youtube.com/user/acecontrolsglobal)

Here, among other things you will find an ACETips-Video on the topic of DE-GAS!

## Gas Spring Refilling Kit

### Flexible and easy to use

The ACE gas spring refilling kit offers you the opportunity to fill gas springs on location or adapt them individually. The refilling kit is equipped with all the parts you need to fill gas springs. Very precise filling of the gas springs is possible using the digital manometer. The table for determining the filling pressure of the gas springs is included with the case. The only thing missing from the delivery is the nitrogen.



The refilling kit contains all filling bells and adjuster knobs for the current ACE gas spring range.

Gas springs filled with the refilling kit must be measured on a calibrated measurement system by ACE for repeat production.

The refilling kit suits 200 bar nitrogen bottles with a thread of W24,32x1/14" (German standard). Other connections are available upon request.

Part number: **GS-FK-C**

# Hydraulic Dampers

## Multi-talent in speed control

**The hydraulic dampers are similar in appearance to the ACE industrial gas springs but are adjusted in the end position and work differently to the DVC family with individual speed adjusters for the push and pull direction. This provide users with the maximum flexibility.**

Whether used as drive compensation or safety elements, the retraction and extension speed of these ACE solutions can always be precisely set. This means that the speed of movement can be controlled, synchronisation regulated in both directions and pivoting loads can be compensated. Depending on the model, the push and pull forces are between 30 N and 40,000 N. These maintenance-free, ready-to-install products are available in body diameters of 12 mm to 70 mm and in stroke lengths up to 800 mm.



## Hydraulic Dampers



### DVC-32

Page 178

Adjustable, Without Free Travel  
**Individual speed adjustment in both directions**  
Cylinder speed controls, Absorption control, Finishing and processing centres



### HBD-50 to HBD-85

Page 180

Adjustable, Without Free Travel  
**Regulation at the highest level**  
Sports equipment, Rehabilitation technology, Conveyor technology



### HBS-28 to HBS-70

Page 184

Adjustable, Without Free Travel  
**Direction change backlash free linear motion regulation**  
Oscillation insulation, Chairlift impact control, Fairground rides, Cylinder speed controls



### HB-12 to HB-70

Page 188

Adjustable  
**Linear motion control**  
Conveyor systems, Transport systems, Furniture industry, Locking systems

## Door Dampers



### TD, TDE

Page 196

Adjustable  
**The safe way to close doors**  
Lift doors, Automatic doors, Doors

Constant speed rates

Sensitive adjustment

High quality and long lifetime

Easy to mount



## DVC-32

### Individual speed adjustment in both directions

#### Adjustable, Without Free Travel


**Compression and extension force 42 N to 2,000 N**

**Stroke 50 mm to 150 mm**

Can be regulated separately in any stroke position: The hydraulic dampers in the DVC-32 model are the first model to have the ability to have the in and out speeds adjusted independently from the outside and therefore more precisely. With their individual adjustment segments for the push and pull direction as well as the double-sided action, these are suitable as safety or control elements.

The great number of mounting accessories makes assembly of these hydraulic dampers by ACE easier and allows these maintenance-free, ready-to-install and self-contained systems universally applicable. Qualitatively high grade, and at the same time simple to use; one of their uses is to absorb swinging loads.

These machine elements are used, for one, in the automotive sector and industrial applications as well as in mechanical engineering and the electronics industry.

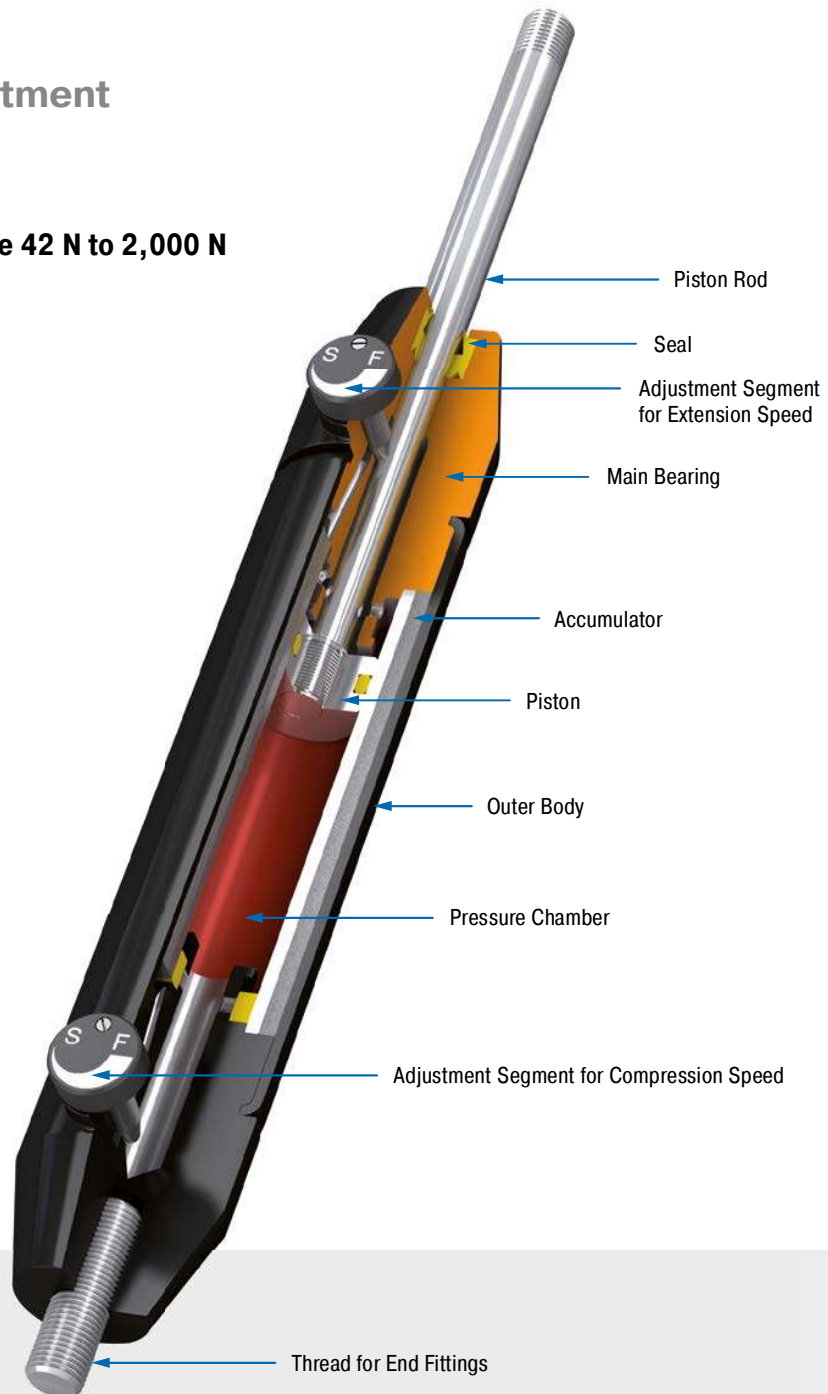

### Technical Data

**Compression and extension force:** 42 N to 2,000 N

**Outer body diameter:** Ø 32 mm

**Piston rod diameter:** Ø 8 mm

**Lifetime:** Approx. 10,000 m

**Operating temperature range:** 0 °C to 65 °C

**Adjustment:** Steplessly adjustable

**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Damping medium:** Automatic Transmission Fluid (ATF)

**Material:** Outer body: Coated aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Cylinder speed controls, Absorption control, Finishing and processing centres

**Note:** Increased break-away force if unit has not moved for some time. Damping force can be adjusted after installation.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories available on request.


Adjustable, Without Free Travel, Compression and extension force 42 N to 2,000 N

**End Fitting**

**Standard Dimensions**

**End Fitting**

**A8**

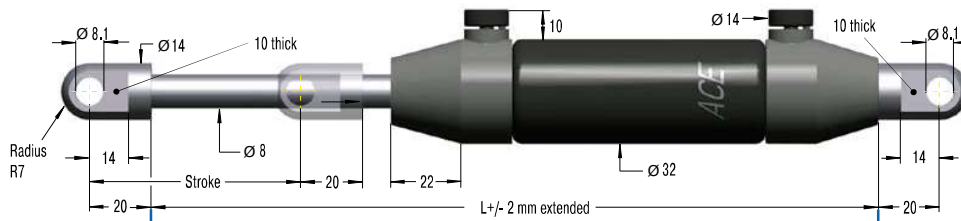

**Eye A8**  
max. force 3,000 N

**B8**



**Performance and Dimensions**

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
DVC-32-50EU	50	240	2,000
DVC-32-100EU	100	340	1,670
DVC-32-150EU	150	440	1,335


<sup>1</sup> Max. extension force for all stroke lengths 2,000 N.

**Ordering Example**

Type (Hydraulic Damper) **DVC-32-50EU-DD-P**  
 Body Ø (32 mm)  
 Stroke (50 mm)  
 EU Compliant  
 Piston Rod End Fitting D8  
 Body End Fitting D8  
 Damping Direction (P = both directions)

**DVC-32-50EU-DD-P**


**C8**



**Stud Thread B8**


**Angle Ball Joint C8**  
max. force 1,200 N

**D8**



**Clevis Fork D8**  
max. force 3,000 N

**E8**



**Swivel Eye E8**  
max. force 3,000 N


**Model Type Prefix**

P: Damping in both directions (standard model)  
 M: Damping on out stroke only (adjustment knob at "rear end" free flow)  
 N: Damping on in stroke only (adjustment knob at "piston rod end" free flow)

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Mounting accessories see from page 200.**

**DVC-32EU-xx**

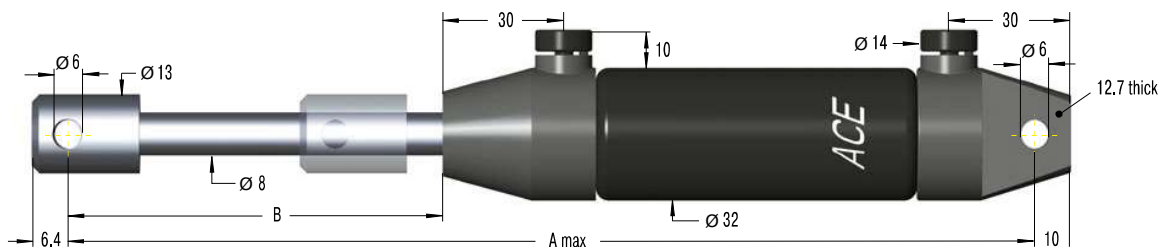

**Performance and Dimensions**

TYPES	Stroke mm	A max. mm	B mm	Compression force max. N	Traction Force Range max. N
DVC-32-50EU-XX	50	250	75.2	2,000	2,000
DVC-32-100EU-XX	100	350	124.4	1,670	2,000
DVC-32-150EU-XX	150	450	173.6	1,335	2,000

## HBD-50 to HBD-85

### Regulation at the highest level

#### Adjustable, Without Free Travel


**Compression and extension force 100 N to 50,000 N**

**Stroke 50 mm to 700 mm**

Motion control in both directions: The HBD model of hydraulic dampers can be adjusted independently in both the push and pull direction. These maintenance-free, ready-to-install and closed systems leave no prayers unanswered as far as the setting of retraction and extension speeds are concerned. In addition each damper works without any free travel therefore the flow of oil can be regulated exactly via the two precision metering orifices.

Adjustment can be made once installed and even when moving through stroke. The coated body and hard-chromed piston rods stand for quality and long service life. The variety of mounting accessories makes assembly easy and the high-end hydraulic dampers universally usable.

HBD hydraulic dampers are used in the automotive, in industry, mechanical engineering and medical technology.

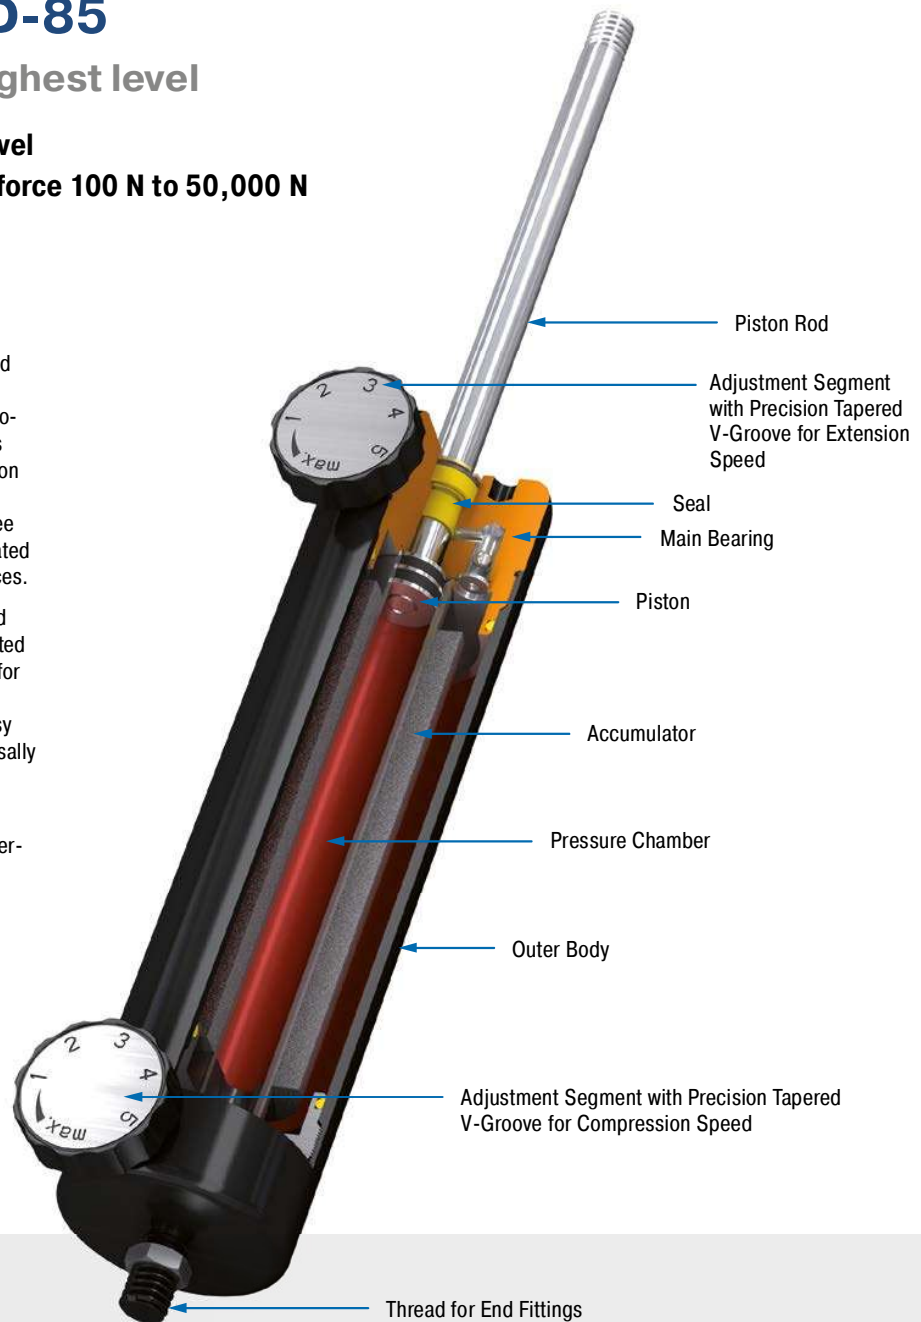

#### Technical Data

**Compression and extension force:** 100 N to 50,000 N

**Outer body diameter:** Ø 50 mm to Ø 85 mm

**Piston rod diameter:** Ø 10 mm to Ø 20 mm

**Lifetime:** Approx. 10,000 m

**Operating temperature range:** 0 °C to 65 °C

**Adjustment:** Steplessly adjustable

**Positive stop:** External positive stops 1 mm to 3 mm before the end of stroke provided by the customer.

**Damping medium:** hydraulic oil

**Material:** Outer body: coated steel; Piston rod: hard chrome plated steel; End fittings: zinc plated steel

**Mounting:** in any position

**Application field:** sports equipment, rehabilitation technology, conveyor technology

**Note:** Increased break-away force if unit has not moved for some time. One locknut included.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.



**On request:** Special oils and other special options. Alternative accessories available on request.



End Fitting

Standard Dimensions

End Fitting

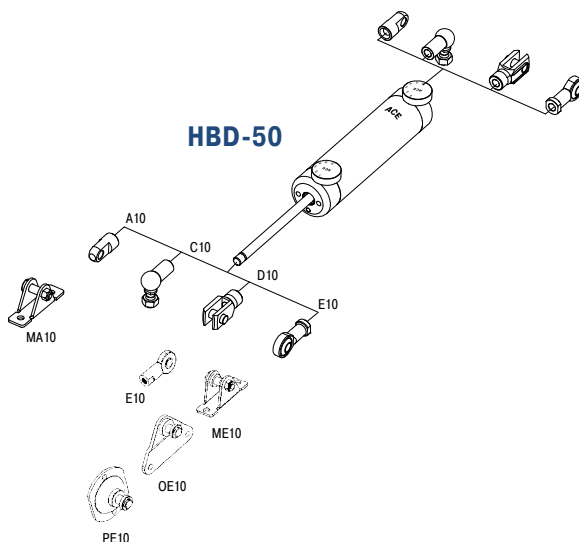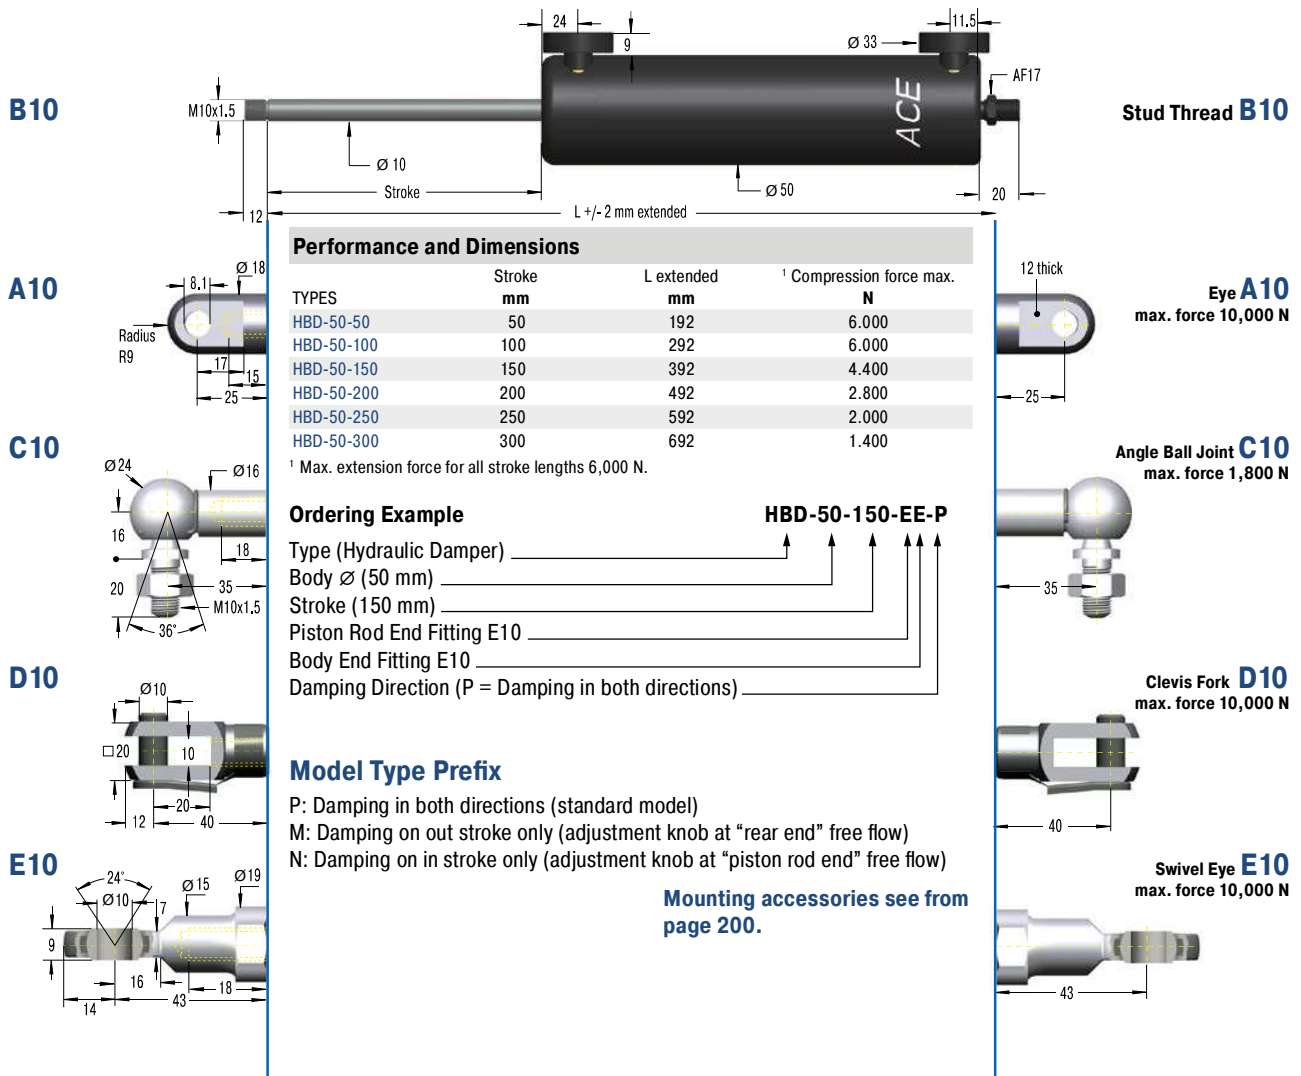

Technical Data

**Compression and extension force:** 100 N to 6,000 N

**Operating temperature range:** 0 °C to 65 °C

**Adjustment:** Steplessly adjustable

**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time. One locknut included.



**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Adjustable, Without Free Travel, Compression and extension force 150 N to 10,000 N

## End Fitting

## Standard Dimensions

## End Fitting

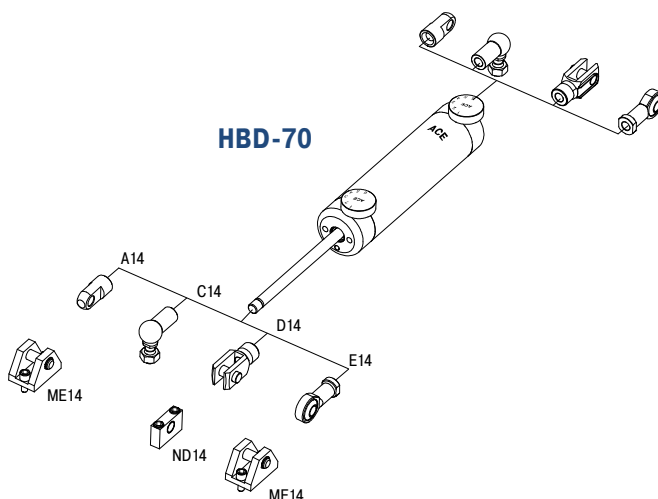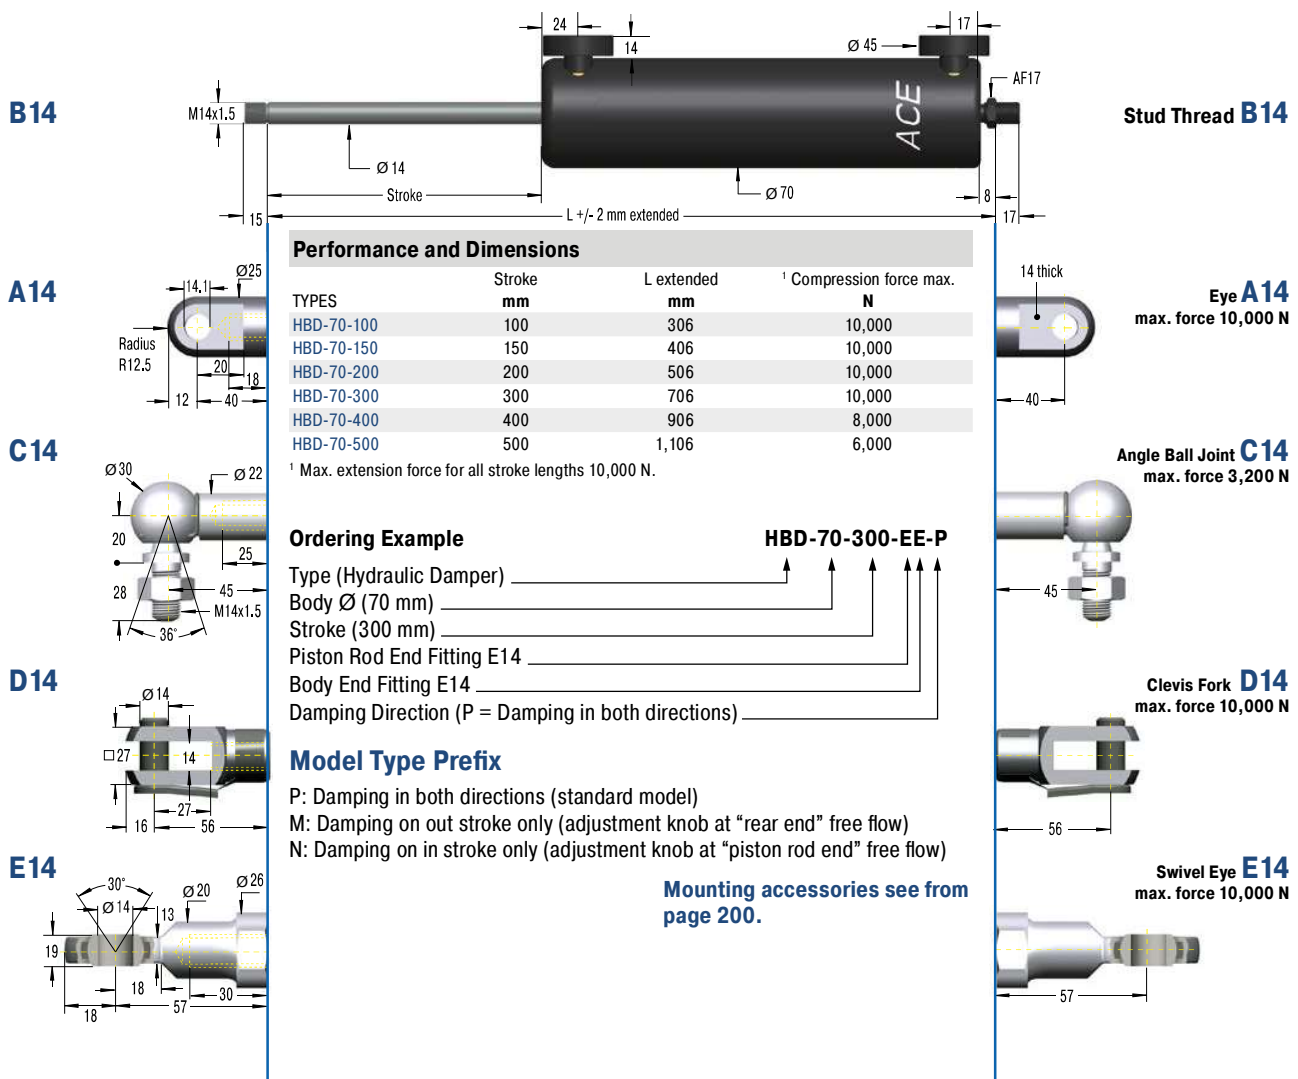



## Technical Data

**Compression and extension force:** 150 N to 10,000 N**Operating temperature range:** 0 °C to 65 °C**Adjustment:** Steplessly adjustable**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.**Material:** Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel**Mounting:** In any position**Note:** Increased break-away force if unit has not moved for some time. One locknut included.**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**End Fitting**

**Standard Dimensions**

**End Fitting**

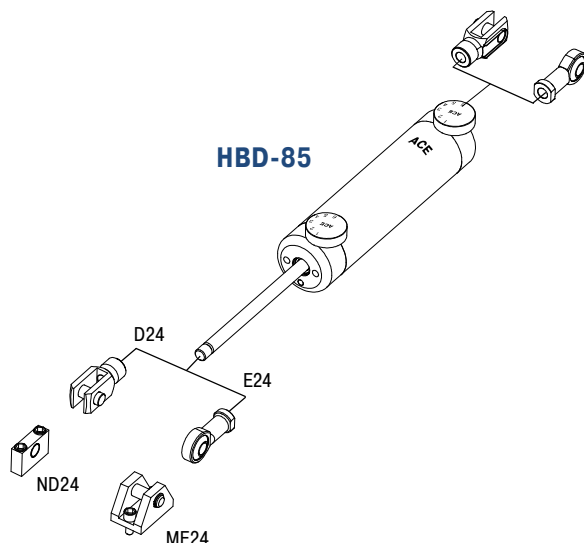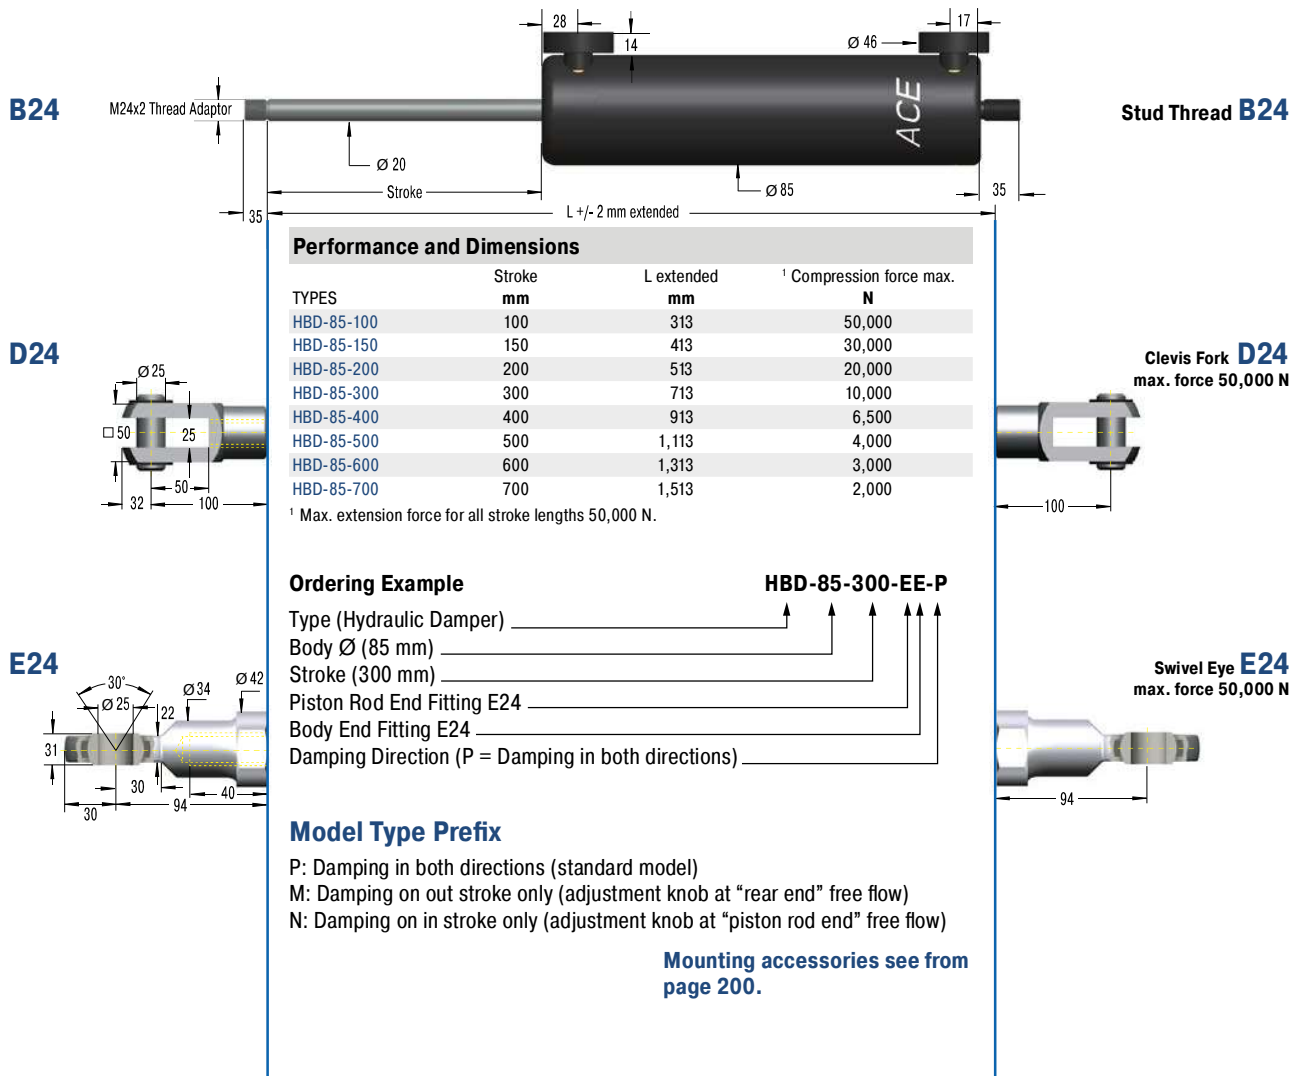

**Technical Data**

**Compression and extension force:** 150 N to 50,000 N

**Operating temperature range:** 0 °C to 65 °C

**Adjustment:** Steplessly adjustable

**Positive stop:** External positive stops 2 mm to 3 mm before the end of stroke provided by the customer.

**Material:** Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time. Thread adaptor for piston rod from M16 to M24 included.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

## HBS-28 to HBS-70

Direction change backlash free  
linear motion regulation

**Adjustable, Without Free Travel**


**Compression and extension force 30 N to 40,000 N**

**Stroke 50 mm to 800 mm**

Damping either in one or both directions: The HBS models of hydraulic dampers are made in a slim gas spring design and are compact and high in performance. Maintenance-free and ready-to-install they allow precise setting of retraction and extension speeds without any free travel when changing direction.

These hydraulic dampers offer constant feeding rates and can be finely tuned via the screw adjustment. A control segment on the piston makes the adjustment at the end position child's play. Thanks to many add-on components the assembly is easy to mount, so that the damper can be universally deployed for damping back and forth swinging masses, such as in power or free conveyors.

In addition to the automotive sector, the application areas are industrial applications, classic mechanical engineering, the electronics and furniture industry and medical technology.

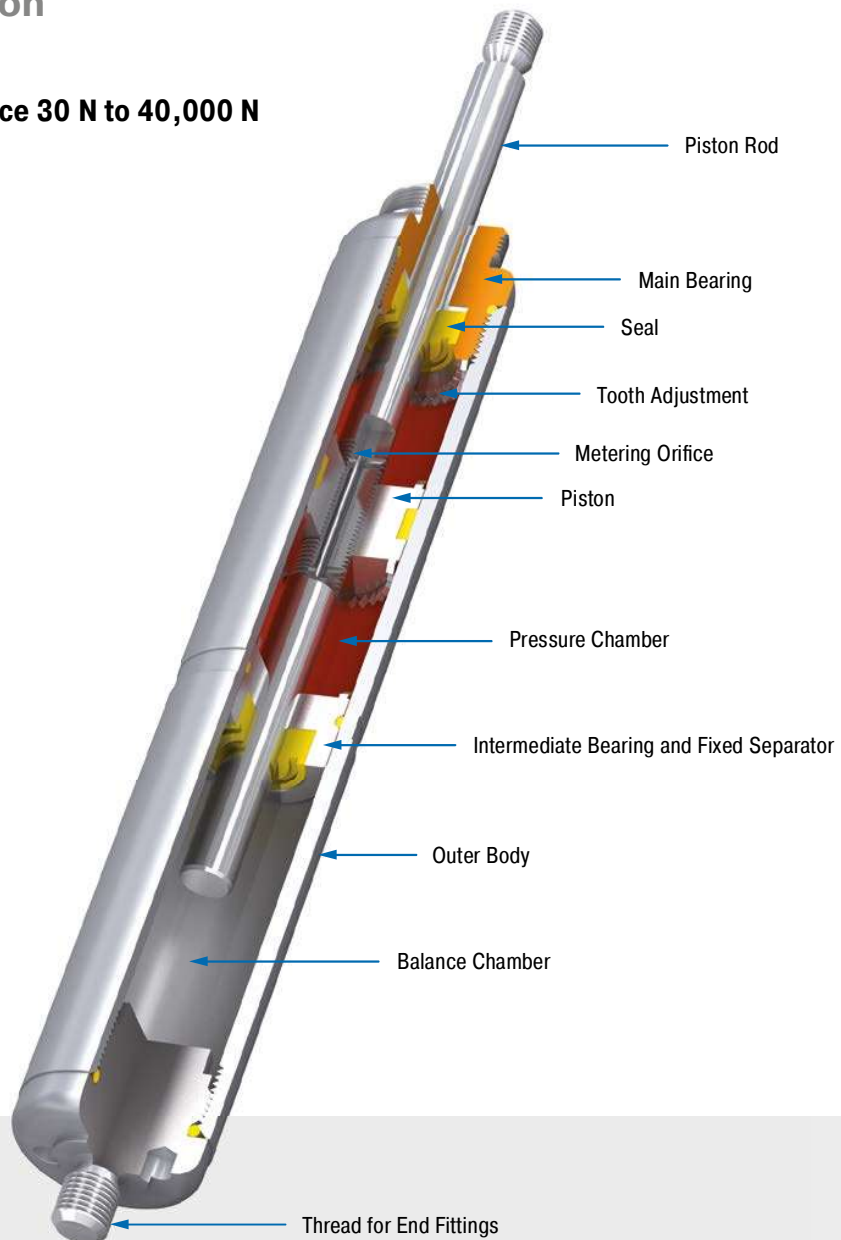

### Technical Data

**Compression and extension force:** 30 N to 40,000 N

**Outer body diameter:** Ø 28 mm to Ø 70 mm

**Piston rod diameter:** Ø 8 mm to Ø 30 mm

**Lifetime:** Approx. 10,000 m

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or compressed position.

**Positive stop:** External positive stops 1 mm to 6 mm before the end of stroke provided by the customer.

**Damping medium:** Hydraulic oil

**Material:** Outer body: Zinc plated or coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Oscillation insulation, Chairlift impact control, Fairground rides, Cylinder speed controls, Absorption control


**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


**Safety instructions:** For long strokes with high forces use swivel mounting block MBS.

**On request:** Special oils and other special options. Alternative accessories available on request.

## End Fitting

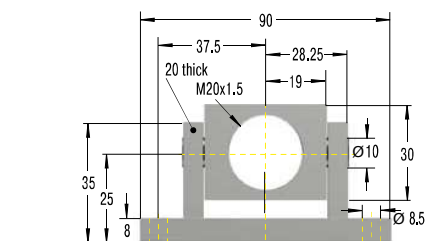

## HBS-28

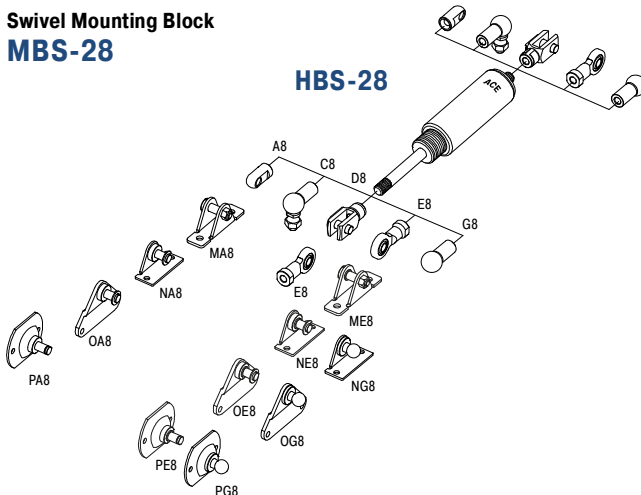


**Safety instructions:** For long strokes with high forces use swivel mounting block MBS.

## End Fitting

## Standard Dimensions


## End Fitting

A10

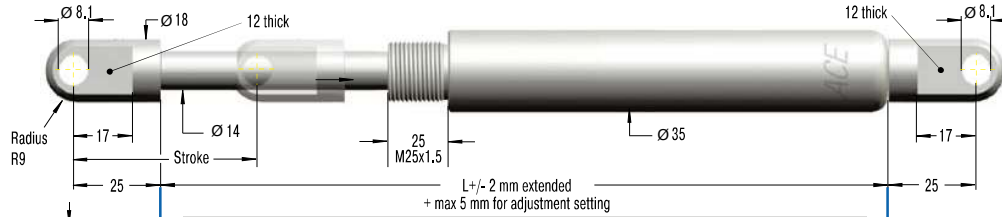
 Eye A10  
 max. force 10,000 N

B10


C10




Stud Thread B10

 Angle Ball Joint C10  
 max. force 1,800 N

D10


 Clevis Fork D10  
 max. force 10,000 N

E10


 Swivel Eye E10  
 max. force 10,000 N

## Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N	<sup>1</sup> Compression force with MBS max. N
HBS-35-100	117	487	10,000	10,000
HBS-35-150	167	637	7,500	10,000
HBS-35-200	217	787	5,150	10,000
HBS-35-300	317	1,087	2,850	10,000
HBS-35-400	417	1,387	1,800	10,000
HBS-35-500	517	1,687	1,240	10,000
HBS-35-600	617	1,987	910	8,600
HBS-35-700	717	2,287	690	6,500
HBS-35-800	817	2,587	540	5,100

<sup>1</sup> Max. extension force for all stroke lengths 10,000 N.

## Ordering Example



Type (Hydraulic Damper) \_\_\_\_\_  
 Body Ø (35 mm) \_\_\_\_\_  
 Stroke (300 mm) \_\_\_\_\_  
 Piston Rod End Fitting E10 \_\_\_\_\_  
 Body End Fitting E10 \_\_\_\_\_  
 Damping Direction (N = in stroke only) \_\_\_\_\_

HBS-35-300-EE-N

## Model Type Prefix

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

Mounting accessories see from  
 page 200.

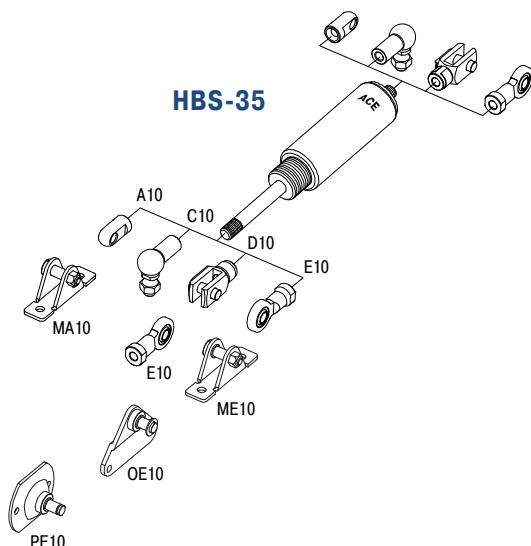
 Swivel Mounting Block  
 MBS-35


## Technical Data

**Compression and extension force:** 30 N to 10,000 N

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. The adjustment can add a max. of 5 mm to the L dimension.

**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: Zinc plated or coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** For long strokes with high forces use swivel mounting block MBS.



## End Fitting

## Standard Dimensions


## End Fitting

### B24




### Stud Thread B24


### D24



### Clevis Fork D24 max. force 50,000 N



### E24



### Swivel Eye E24 max. force 50,000 N



### Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N	<sup>1</sup> Compression force with MBS max. N
HBS-70-100	111	561	40,000	40,000
HBS-70-200	211	861	40,000	40,000
HBS-70-300	311	1,161	40,000	40,000
HBS-70-400	411	1,461	30,300	40,000
HBS-70-500	511	1,761	21,600	40,000
HBS-70-600	611	2,061	16,200	40,000
HBS-70-700	711	2,361	12,600	40,000
HBS-70-800	811	2,661	10,100	40,000

<sup>1</sup> Max. extension force for all stroke lengths 40,000 N.

### Ordering Example

Type (Hydraulic Damper) \_\_\_\_\_  
 Body Ø (70 mm) \_\_\_\_\_  
 Stroke (300 mm) \_\_\_\_\_  
 Piston Rod End Fitting E24 \_\_\_\_\_  
 Body End Fitting E24 \_\_\_\_\_  
 Damping Direction (N = in stroke only) \_\_\_\_\_


**HBS-70-300-EE-N**

### Model Type Prefix


P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

Mounting accessories see from  
page 200.

### Rod Shroud W24-70 Ø 80, L = Stroke + 180

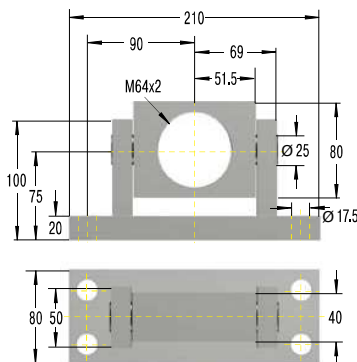

### Swivel Mounting Block MBS-70

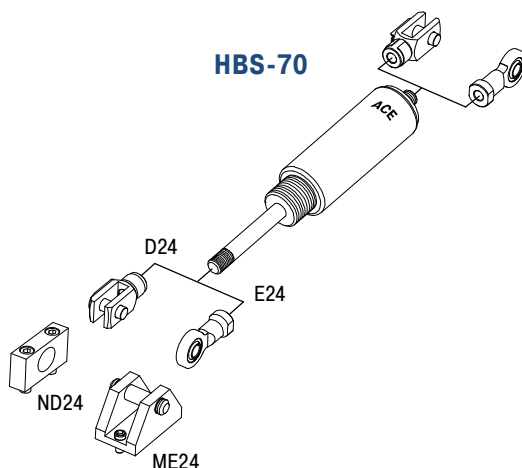

### Technical Data

**Compression and extension force:** 2,000 N to 40,000 N

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. The adjustment can add a max. of 5 mm to the L dimension.

**Positive stop:** External positive stops 5 mm to 6 mm before the end of stroke provided by the customer.

**Material:** Outer body: Zinc plated or coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety instructions:** For long strokes with high forces use swivel mounting block MBS.

## HB- 12 to HB-70

### Linear motion control

#### Adjustable


**Compression and extension force 20 N to 50,000 N**

**Stroke 10 mm to 800 mm**

High quality and long service life: The HB model of hydraulic damper can also be used as single or double acting brake. Its coated body in a slim gas spring design and the piston rods with wear-resistant surface coating are features of high quality and long service life.

The maintenance free, ready-to-install and closed systems provide a constant feed rate and are adjustable, and the control segment on the piston makes adjustment at the end position child's play. Thanks to many add-on components the assembly is easy to mount, so that the damper can be universally deployed for damping back and forth swinging masses, such as in power or free conveyors.

On automotive or industrial applications, mechanical engineering, medical technology or the electronics and furniture industry, these machine elements are found in a number of different areas.

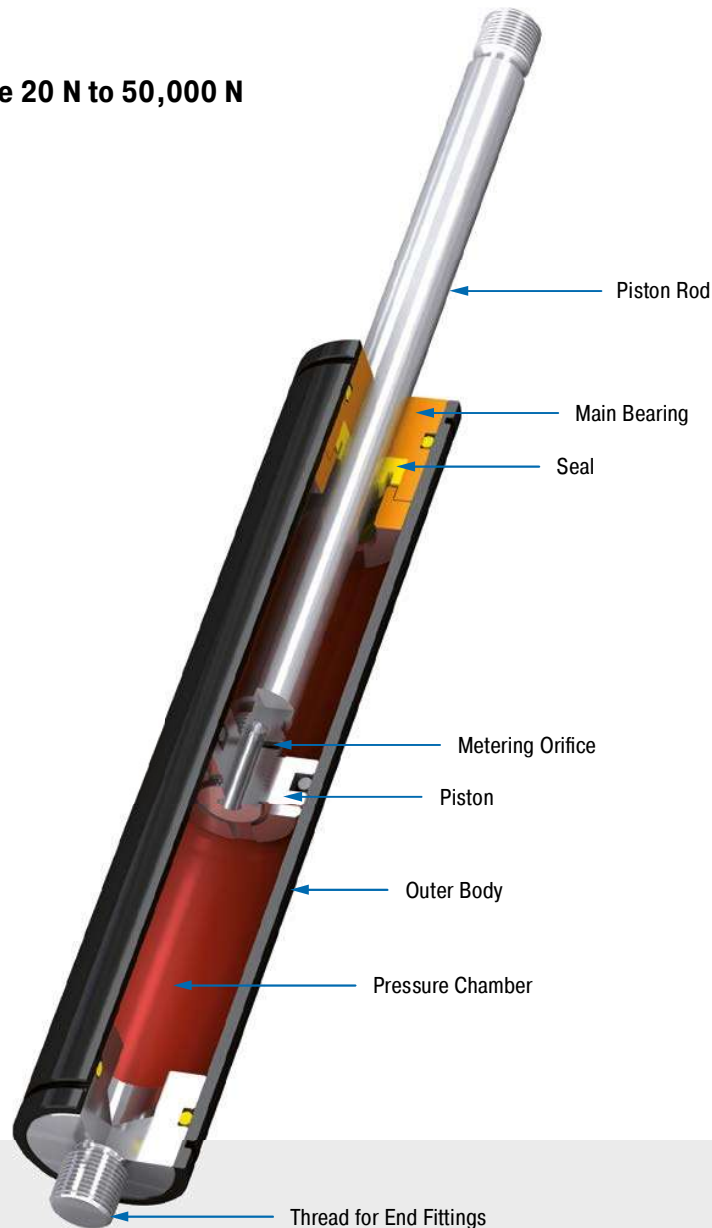

#### Technical Data

**Compression and extension force:** 20 N to 50,000 N

**Outer body diameter:** Ø 12 mm to Ø 70 mm

**Piston rod diameter:** Ø 4 mm to Ø 30 mm

**Lifetime:** Approx. 10,000 m

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

**Positive stop:** External positive stops 1 mm to 6 mm before the end of stroke provided by the customer.

**Damping medium:** Hydraulic oil

**Material:** Outer body: Coated steel; Piston rod: Steel or stainless steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Conveyor systems, Transport systems, Furniture industry, Locking systems, Sports equipment

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


**On request:** Special oils and other special options. Alternative accessories available on request.

End Fitting

Standard Dimensions

End Fitting


A3.5

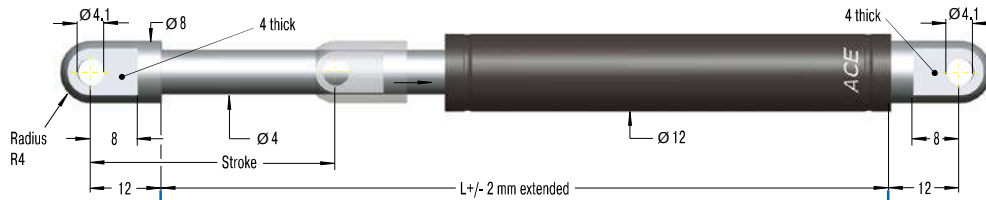


Eye A3.5  
max. force 370 N

B3.5

C3.5




Stud Thread B3.5




Angle Ball Joint C3.5  
max. force 370 N

D3.5




Clevis Fork D3.5  
max. force 370 N

E3.5




Swivel Eye E3.5  
max. force 370 N

G3.5



Ball Socket G3.5  
max. force 370 N

Rod Shroud W3.5-12



Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
HB-12-10	10	55	180
HB-12-20	20	75	180
HB-12-30	30	95	180
HB-12-40	40	115	180
HB-12-50	50	135	180
HB-12-60	60	155	180
HB-12-70	70	175	180
HB-12-80	80	195	150

<sup>1</sup> Max. extension force for all stroke lengths 180 N.

Ordering Example

Type (Hydraulic Damper) \_\_\_\_\_  
Body Ø (12 mm) \_\_\_\_\_  
Stroke (30 mm) \_\_\_\_\_  
Piston Rod End Fitting A3.5 \_\_\_\_\_  
Body End Fitting C3.5 \_\_\_\_\_  
Damping Direction (M = out stroke only) \_\_\_\_\_

HB-12-30-AC-M

Model Type Prefix

P: Damping in both directions  
N: Damping on in stroke only  
M: Damping on out stroke only  
X: Special model suffix

Mounting accessories see from  
page 200.

Technical Data

**Compression and extension force:** 20 N to 180 N

**Free travel:** Construction of the damper results in a free travel of approx. 21 % of stroke.

**Separator piston:** -

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 6 mm to the L dimension.


**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: stainless steel (1.4301/1.4305, AISI 304/303); End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

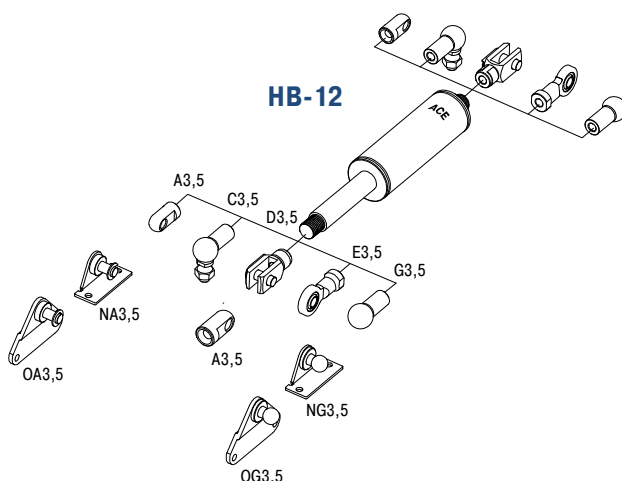


## End Fitting

## Standard Dimensions


## End Fitting

A5

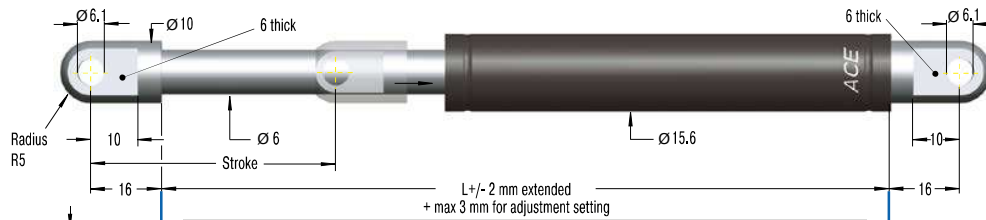
**Eye A5**  
 max. force 800 N

B5

C5



## Performance and Dimensions


TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
HB-15-25	25	93	800
HB-15-50	50	143	800
HB-15-75	75	193	800
HB-15-100	100	243	350
HB-15-150	150	343	300

<sup>1</sup> Max. extension force for all stroke lengths 800 N.


Stud Thread B5

**Angle Ball Joint C5**  
 max. force 500 N


D5


**Clevis Fork D5**  
 max. force 800 N

E5


**Swivel Eye E5**  
 max. force 800 N

G5


**Ball Socket G5**  
 max. force 500 N

## Ordering Example

Type (Hydraulic Damper) \_\_\_\_\_  
 Body Ø (15.6 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting C5 \_\_\_\_\_  
 Body End Fitting C5 \_\_\_\_\_  
 Damping Direction (M = out stroke only) \_\_\_\_\_


HB-15-150-CC-M

## Model Type Prefix

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

Mounting accessories see from  
 page 200.

## Rod Shroud W5-15



## Technical Data

**Compression and extension force:** 20 N to 800 N

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Extension force 40 N; dimension L = 2.45 x stroke + 49 mm. Part number: add suffix -T.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 6 mm to the L dimension.


**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

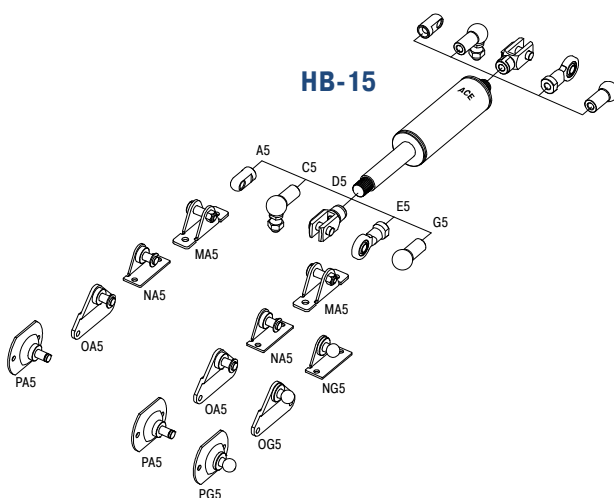

End Fitting

Standard Dimensions

End Fitting

A8




Eye A8

max. force 3,000 N

B8

C8



Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
HB-22-50	50	150	1,800
HB-22-100	100	250	1,800
HB-22-150	150	350	1,800
HB-22-200	200	450	1,000
HB-22-250	250	550	1,000


<sup>1</sup> Max. extension force for all stroke lengths 1,800 N.

Stud Thread B8

Angle Ball Joint C8

max. force 1,200 N

D8



Ordering Example


Type (Hydraulic Damper) \_\_\_\_\_  
Body Ø (23 mm) \_\_\_\_\_  
Stroke (150 mm) \_\_\_\_\_  
Piston Rod End Fitting D8 \_\_\_\_\_  
Body End Fitting D8 \_\_\_\_\_  
Damping Direction (M = out stroke only) \_\_\_\_\_

HB-22-150-DD-M

Clevis Fork D8

max. force 3,000 N


E8



Swivel Eye E8

max. force 3,000 N

G8



Ball Socket G8


max. force 1,200 N

Model Type Prefix

P: Damping in both directions  
N: Damping on in stroke only  
M: Damping on out stroke only  
X: Special model suffix

Mounting accessories see from page 200.

Rod Shroud W8-22



Technical Data

**Compression and extension force:** 30 N to 1,800 N

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Extension force 50 N; dimension L = 2.38 x stroke + 55 mm. Part number: add suffix -T.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 6 mm to the L dimension.


**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

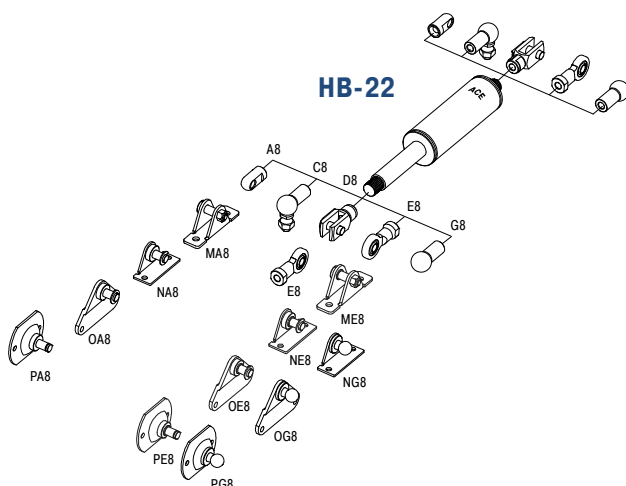



## End Fitting

## Standard Dimensions


## End Fitting

A8



**Eye A8**  
 max. force 3,000 N

B8


C8


**Stud Thread B8**
**Angle Ball Joint C8**  
 max. force 1,200 N


D8


**Clevis Fork D8**  
 max. force 3,000 N


E8


**Swivel Eye E8**  
 max. force 3,000 N

G8


**Ball Socket G8**  
 max. force 1,200 N

Rod Shroud W8-28



## Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
HB-28-100	100	260	3,000
HB-28-150	150	360	3,000
HB-28-200	200	460	3,000
HB-28-250	250	560	3,000
HB-28-300	300	660	2,500
HB-28-350	350	760	2,000
HB-28-400	400	860	1,500
HB-28-500	500	1,060	1,000

<sup>1</sup> Max. extension force for all stroke lengths 3,000 N.

## Ordering Example

Type (Hydraulic Damper) \_\_\_\_\_  
 Body Ø (28 mm) \_\_\_\_\_  
 Stroke (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting D8 \_\_\_\_\_  
 Body End Fitting D8 \_\_\_\_\_  
 Damping Direction (M = out stroke only) \_\_\_\_\_

HB-28-150-DD-M

## Model Type Prefix

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

 Mounting accessories see from  
 page 200.

## Technical Data

**Compression and extension force:** 30 N to 3,000 N

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Extension force 80 N; dimension L = 2.35 x stroke + 60 mm. Part number: add suffix -T.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping


Damping force adjustable before installation. Adjustment can add a max. of 6 mm to the L dimension.

**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.

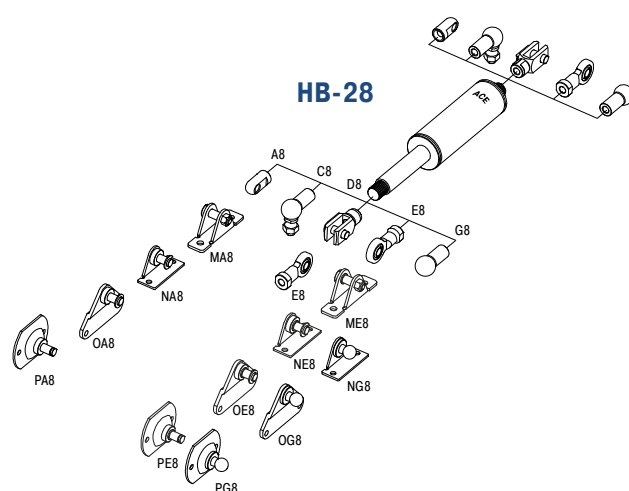**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.




End Fitting

Standard Dimensions


End Fitting

A14




Eye A14  
max. force 10,000 N

B14




Stud Thread B14

C14




Angle Ball Joint C14  
max. force 3,200 N

D14



Clevis Fork D14  
max. force 10,000 N

E14



Swivel Eye E14  
max. force 10,000 N

Performance and Dimensions

TYPES	Stroke mm	L extended mm	<sup>1</sup> Compression force max. N
HB-40-100	100	275	10,000
HB-40-150	150	375	10,000
HB-40-200	200	475	10,000
HB-40-300	300	675	10,000
HB-40-400	400	875	8,000
HB-40-500	500	1,075	6,000
HB-40-600	600	1,275	4,000
HB-40-700	700	1,475	3,000
HB-40-800	800	1,675	3,000

<sup>1</sup> Max. extension force for all stroke lengths 10,000 N.

Ordering Example

Type (Hydraulic Damper) \_\_\_\_\_  
Body Ø (40 mm) \_\_\_\_\_  
Stroke (300 mm) \_\_\_\_\_  
Piston Rod End Fitting E14 \_\_\_\_\_  
Body End Fitting E14 \_\_\_\_\_  
Damping Direction (N = in stroke only) \_\_\_\_\_


HB-40-300-EE-N

Model Type Prefix

P: Damping in both directions  
N: Damping on in stroke only  
M: Damping on out stroke only  
X: Special model suffix

Mounting accessories see from  
page 200.

Rod Shroud W14-40



Technical Data

**Compression and extension force:** 30 N to 10,000 N

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Extension force 150 N; dimension L = 2.32 x stroke + 82 mm. Part number: add suffix -T.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 6 mm to the L dimension.


**Positive stop:** External positive stops 1 mm to 1.5 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: steel with wear-resistant coating; End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

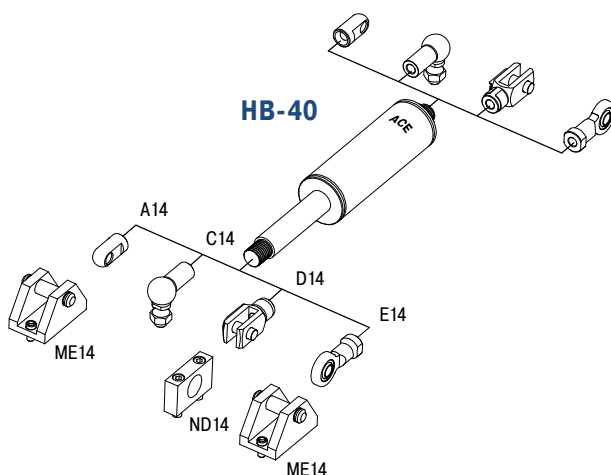

## End Fitting

## Standard Dimensions

## End Fitting

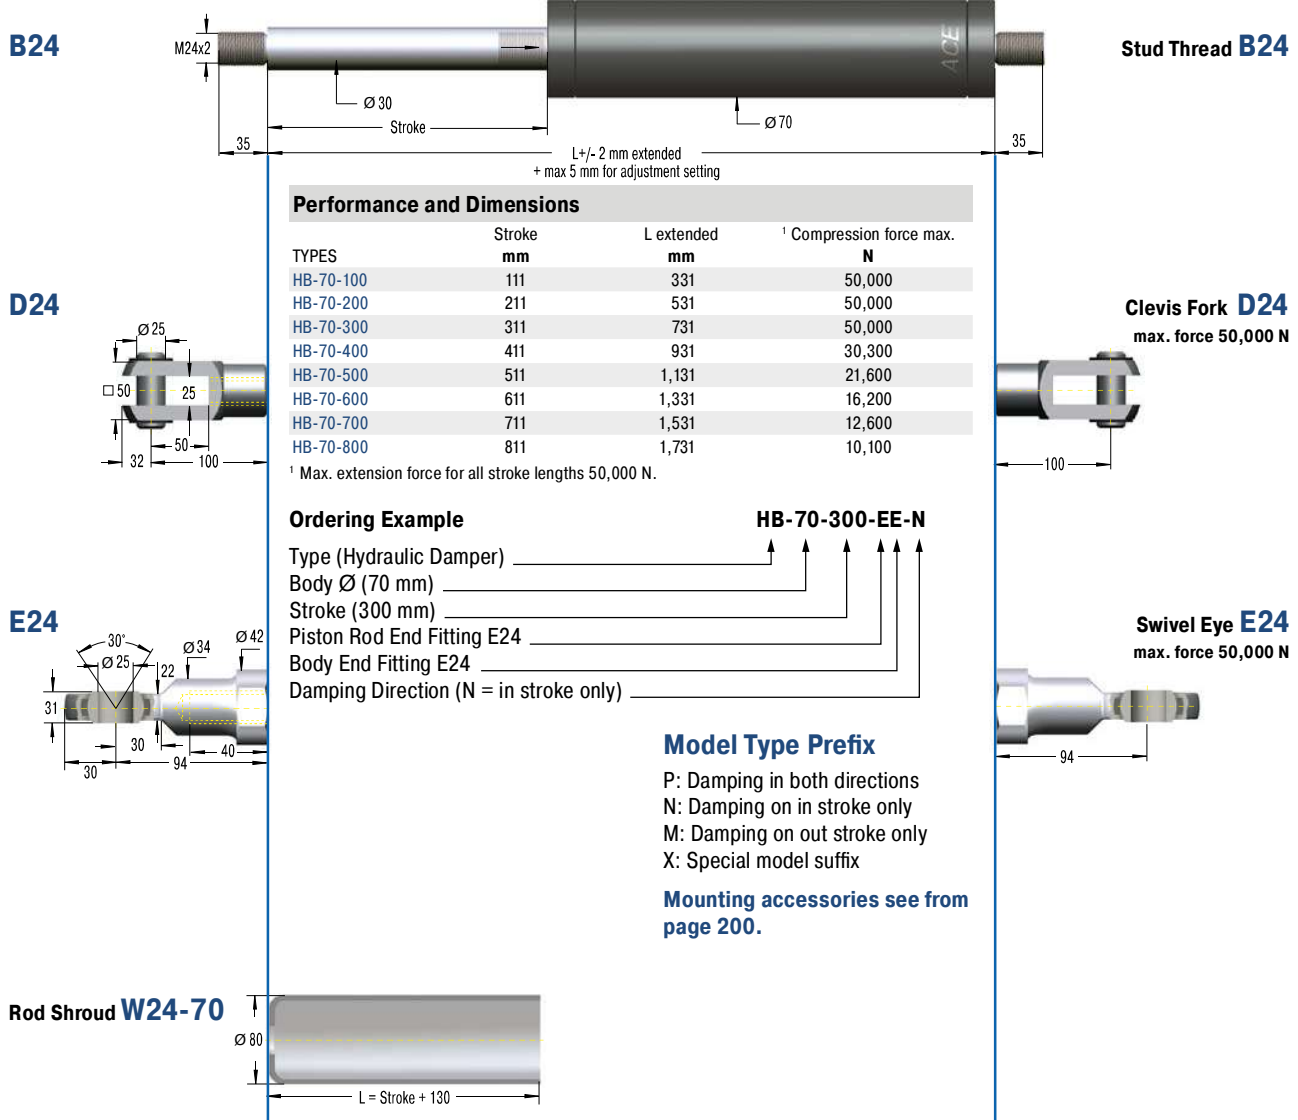

## Technical Data

**Compression and extension force:** 2,000 N to 50,000 N

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Extension force min. 250 N; dimension L + 150 mm. Part number: add suffix -T.

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. The adjustment can add a max. of 5 mm to the L dimension.


**Positive stop:** External positive stops 5 mm to 6 mm before the end of stroke provided by the customer.

**Material:** Outer body: coated steel; Piston rod: hard chrome plated steel; End fittings: zinc plated steel

**Mounting:** in any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

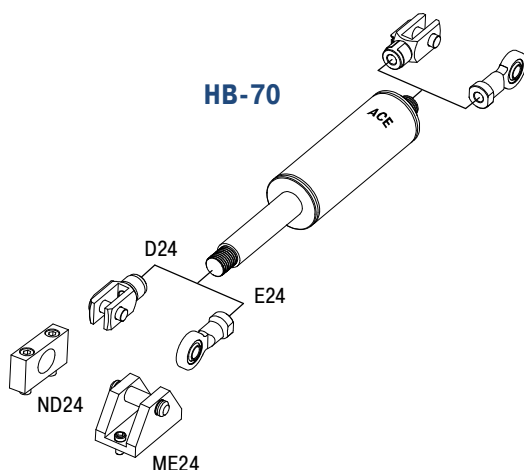




# Locate and Eliminate Disturbing Vibration

## Vibration isolation

- Free App for iPhone
- Precise 3-axis measurement system
- Simple & comprehensible menu
- Immediate product recommendation
- Available in English, German and French

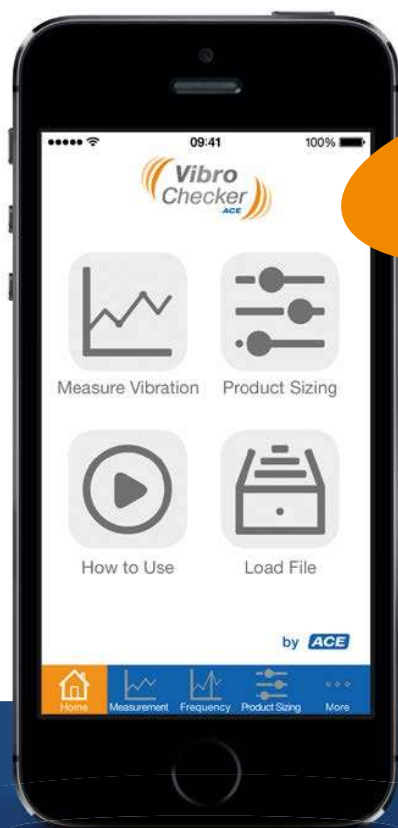

free in the  
App Store

Start now.  
**Free App!**



[www.vibrochecker.com](http://www.vibrochecker.com)

## TD, TDE

### The safe way to close doors

#### Adjustable

**Energy capacity 75 Nm/Cycle to 190 Nm/Cycle**

**Stroke 50 mm to 120 mm**

Safety for individuals, doors and frames: whether acting single-sided or double-sided, ACE TD-28 and TDE-28 dampers securely prevent doors of all types and many weight classes from slamming shut. This is because the energy for stroke lengths between 50 mm and 120 mm is absorbed so reliably, that people and their possessions are protected.

The desired attenuation force is set manually; as a result, this door damper can absorb energy up to max. 190 Nm/stroke. Impact masses up to a maximum of 7,000 kg can be overcome depending on which type. ACE door dampers are manufactured to be high quality and durable with hard chrome-plated piston rod and galvanised steel cylinder tubes.

Practical and safe, these door dampers are suitable for manual or automatically operated hinged and sliding doors, as is often seen in the elevator and furniture industries, as well as in building technology.



#### Technical Data

**Outer body diameter:** Ø 28 mm

**Piston rod diameter:** Ø 8 mm

**Free travel:** TDE: marginal

**Operating temperature range:** -20 °C to +80 °C

**Adjustment:** Pull the piston rod fully out and turn the knurled rod end button. The internal toothed adjustment allows the damping to be separately adjusted for each side. As a result of the adjustment mechanism the overall length L can be increased by up to 4 mm (TDE-28) or 8 mm (TD-28).

**Material:** Outer body: zinc plated steel; Piston rod: hard chrome plated steel

**Impact velocity range:** 0.1 m/s to 2 m/s


**Strokes per minute:** max. 10

**Application field:** lift doors, automatic doors, doors


**Note:** ACE door dampers are single ended or double ended adjustable hydraulic shock absorbers.

**On request:** Special oils, other special options and special accessories are available on request.

## TD-28

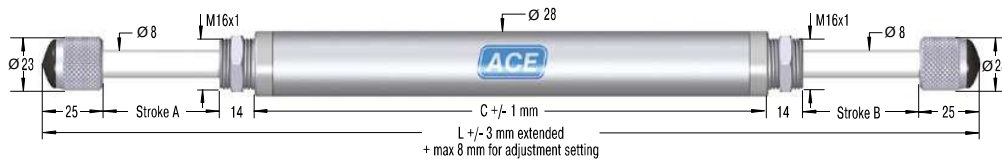

### MB-16 Clamp Mount



### Model Type Prefix

F: Automatic return with return spring  
D: Without return spring. When one piston is pushed in, the piston rod at the other end is pushed out (thus the damper must be impacted from alternate ends to sequence correctly).

### Ordering Example

Type (Door Damper) \_\_\_\_\_  
Body Ø (28 mm) \_\_\_\_\_  
Stroke A (50 mm) \_\_\_\_\_  
Stroke B (50 mm) \_\_\_\_\_


**TD-28-50-50**

### Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Impact Mass max. kg	Stroke A mm	Stroke B mm	C mm	L extended mm	Return Force max. N	<sup>1</sup> Return Type
TD-28-50-50-F	75	1,550	150	50	50	220	402	30	F
TD-28-70-70-F	70	1,500	200	70	70	260	482	30	F
TD-28-100-100-F	80	1,500	250	100	100	220	502	40	F
TD-28-120-120-D	165	3,800	250	120	120	208	417	-	D

<sup>1</sup> Standard model. Other models available on request.

## TDE-28

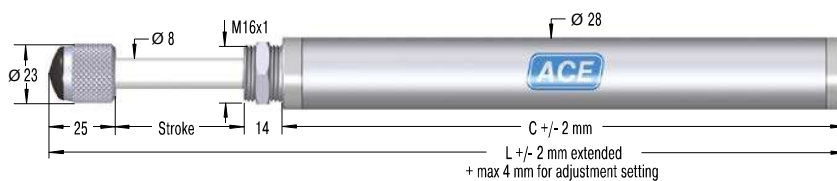

### MB-16 Clamp Mount



### Ordering Example

Type (Door Damper) \_\_\_\_\_  
Body Ø (28 mm) \_\_\_\_\_  
Stroke (50 mm) \_\_\_\_\_

**TDE-28-50**

### Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Impact Mass max. kg	Stroke mm	C mm	L extended mm	Return Force max. N
TDE-28-50	80	2,400	4,000	50	130	219	30
TDE-28-70	112	2,400	5,600	70	158	267	30
TDE-28-100	160	2,400	8,000	100	193	332	30
TDE-28-120	190	2,400	7,000	120	214	371	40

## Application Examples


### DVC-32

#### Precise unreeling

Hydraulic dampers bring the sled movement of this textile machine to a gentle stop. At the turning point of 130 kg reeling spools, a sled should move up and down smoothly without causing a collision at the end of stroke position. The solution was provided by the hydraulic damper DVC-32-100EU. A self-contained sealed unit, ready to install and maintenance-free these units are ideal for precise control of speeds in both directions of travel. The travel speed is maintained throughout the entire stroke and can be independently adjusted in each direction of travel. Thanks to their compact design and wide choice of mounting accessories, these dampers could be easily integrated into this machine.

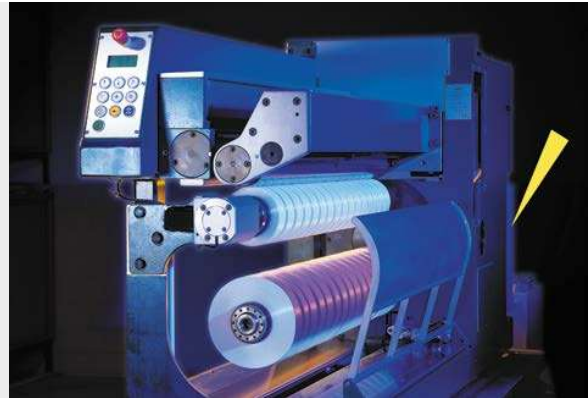

Textile machine unreels threads even better

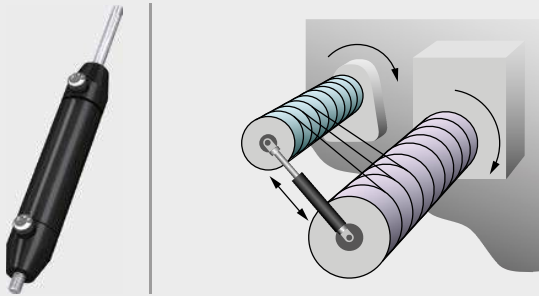


### HB-15

#### Operating speed of flaps top-regulated

In the past, operators of used-clothes containers could sustain injury because the flaps closed relatively quickly and uncontrollably. Various hydraulic dampers of the type HB-15, which are designed specifically for the type of container, regulate the synchronization of the flap in both directions and thereby serve to regulate the operating speed. To accommodate a range of requirements and to provide optimal protection against theft, different types with different strokes are mounted on flaps without damping, on large flaps with damping and on rotor flaps with damping.



Hydraulic dampers prevent fingers becoming trapped in used-clothes containers as they ensure more gentle opening and closing movements  
 MCB Milieu & Techniek BV, 4704 SE Roosendaal, Netherlands

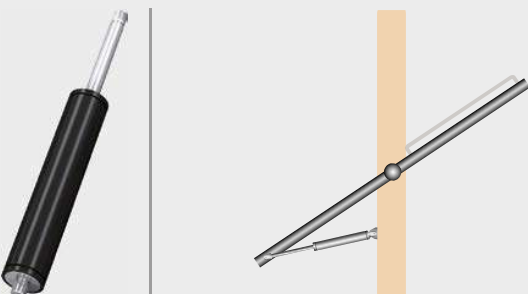




## HB-40

### Swinging movements cushioned by hydraulic dampers

Passengers always feel the swinging movement involved when cable cars arrive at the ski station. Maintenance-free hydraulic dampers type HB-40-300-EE-X-P cushion these movements perfectly. Designers of the cable cars, connected by means of an articulated joint via a four-point frame and connection guide to the suspension rod, profit from the ability of the adjustable dampers to absorb compressive forces of up to 10,000 N on either side.



Hydraulic dampers for added convenience when operating cable cars

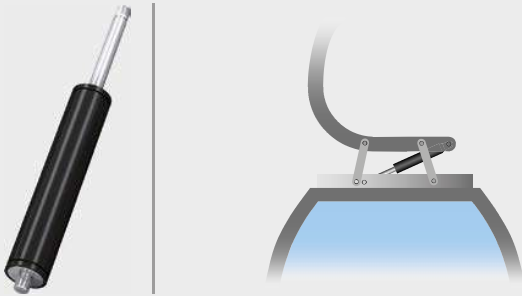

## Mounting Accessories

for gas springs and hydraulic dampers  
made of steel


**By taking advantage of the very extensive range of ACE end fittings and mounting brackets you can easily and simply install our gas springs and hydraulic dampers. You profit from the variety of DIN Standard end fittings such as swivel eyes, clevis forks, angle ball joints, inline ball joints, and complementary ball sockets.**

ACE also offers eye fittings made of wear-resistant steel to meet the higher specification requirements found in industrial applications. With over 30 different types available these mounting accessories provide an extensive range of combinations for optimum installations.

With the ACE selection programme you can choose not only your ACE gas springs but also the ideal end fittings and mounting brackets for your individual application example.

**The complete range of accessories are also available as individual components.**


**Individual  
Combinations!**

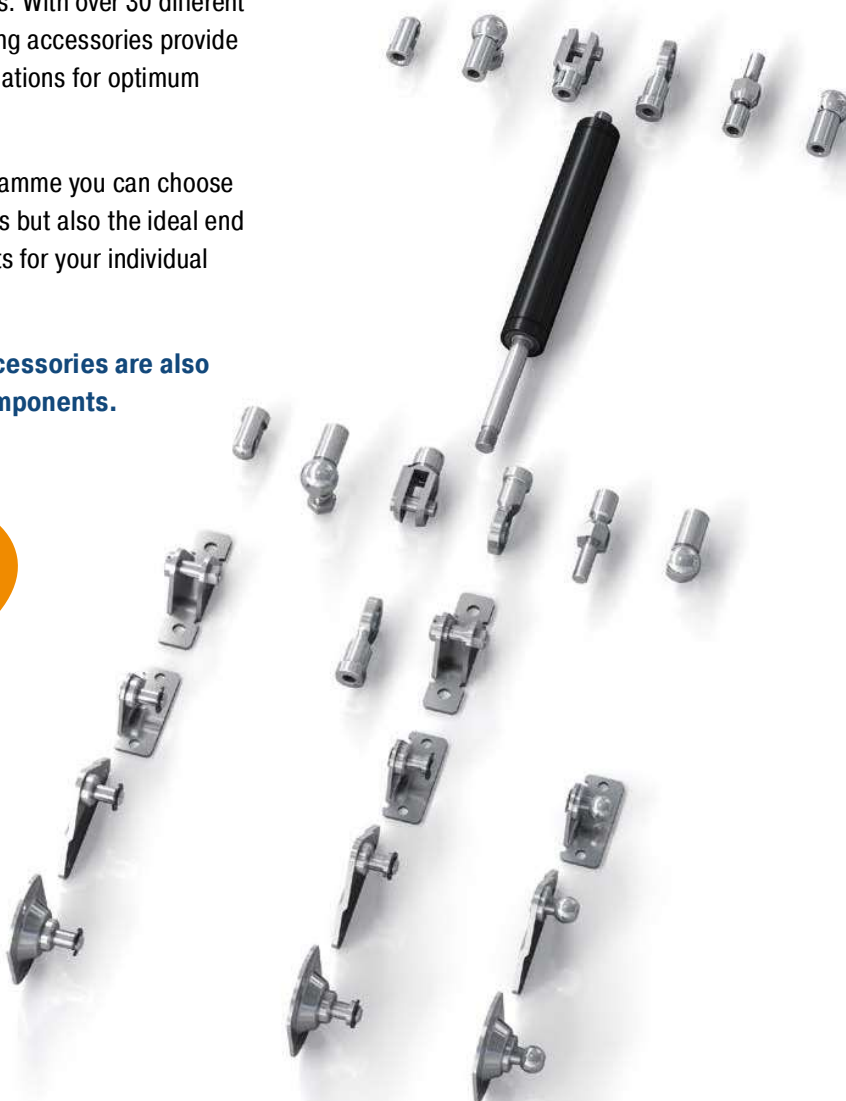

**M3.5x0.6** (for GS-8, GS-10, GS-12, GZ-15, HB-12)

**C3.5**


Angle Ball Joint  
DIN 71802



<sup>1</sup> max. force 370 N

**E3.5**


Swivel Eye  
DIN 648



<sup>1</sup> max. force 370 N

**A3.5**

Eye




<sup>1</sup> max. force 370 N




**NA3.5**

Angle Bracket with Ball




<sup>1</sup> max. force 180 N




**OA3.5**

Side Bracket with Ball




<sup>1</sup> max. force 180 N



**D3.5**

Clevis Fork  
DIN 71752




<sup>1</sup> max. force 370 N



**A3.5**


Eye



<sup>1</sup> max. force 370 N

**G3.5**

Ball Socket  
DIN 71805




<sup>1</sup> max. force 370 N




**NG3.5**

Angle Bracket with Ball




<sup>1</sup> max. force 180 N




**OG3.5**




Side Bracket with Ball
















<sup>1</sup> max. force 180 N



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M5x0.8****(for GS-15, HB-15)****C5**  
Angle Ball Joint  
DIN 71802<sup>1</sup> max. force 500 N**D5**  
Clevis Fork  
DIN 71752<sup>1</sup> max. force 800 N**F5**  
Inline Ball Joint<sup>1</sup> max. force 500 N


Attention! Must only be used with compression loads!

**A5**  
Eye<sup>1</sup> max. force 800 N**MA5**  
Bearing Shoe<sup>1</sup> max. force 500 N**NA5**  
Angle Bracket with Ball<sup>1</sup> max. force 400 N**E5**  
Swivel Eye  
DIN 648<sup>1</sup> max. force 800 N**OA5**  
Side Bracket with Ball<sup>1</sup> max. force 180 N**PA5**  
Round Bracket with Ball<sup>1</sup> max. force 500 N**G5**  
Ball Socket  
DIN 71805<sup>1</sup> max. force 500 N**NG5**  
Angle Bracket with Ball<sup>1</sup> max. force 400 N**OG5**  
Side Bracket with Ball<sup>1</sup> max. force 180 N**PG5**  
Round Bracket with Ball<sup>1</sup> max. force 500 N<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M8x1.25**


(for GS-19, GS-22, GZ-19, HB-22, HB-28, HBS-28, DVC-32)

**C8**  
Angle Ball Joint  
DIN 71802



<sup>1</sup> max. force 1,200 N


**F8**  
Inline Ball Joint



<sup>1</sup> max. force 1,200 N


Attention! Must only be used with compression loads!

**A8**  
Eye




<sup>1</sup> max. force 3,000 N


**MA8**  
Bearing Shoe




<sup>1</sup> max. force 1,800 N




**NA8**  
Angle Bracket with Ball



<sup>1</sup> max. force 1,000 N




**OA8**  
Side Bracket with Ball




<sup>1</sup> max. force 1,200 N




**PA8**  
Round Bracket with Ball



<sup>1</sup> max. force 1,200 N




**D8**  
Clevis Fork  
DIN 71752



<sup>1</sup> max. force 3,000 N
















**E8**  
Swivel Eye  
DIN 648



<sup>1</sup> max. force 3,000 N

**M8x1.25**

(for GS-19, GS-22, GZ-19, HB-22, HB-28, HBS-28, DVC-32)


**E8**  
Swivel Eye  
DIN 648<sup>1</sup> max. force 3,000 N**ME8**  
Bearing Shoe<sup>1</sup> max. force 1,800 N**NE8**  
Angle Bracket with Ball<sup>1</sup> max. force 1,000 N**OE8**  
Side Bracket with Ball<sup>1</sup> max. force 1,200 N**PE8**  
Round Bracket with Ball<sup>1</sup> max. force 1,200 N**G8**  
Ball Socket  
DIN 71805<sup>1</sup> max. force 1,200 N**NG8**  
Angle Bracket with Ball<sup>1</sup> max. force 1,000 N**OG8**  
Side Bracket with Ball<sup>1</sup> max. force 1,200 N**PG8**  
Round Bracket with Ball<sup>1</sup> max. force 1,200 N<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.



**M10x1.5** (for GS-28, GZ-28, HBD-50, HBS-35)

**C10**


Angle Ball Joint  
DIN 71802



<sup>1</sup> max. force 1,800 N

**F10**

Inline Ball Joint




<sup>1</sup> max. force 1,800 N

Attention! Must only be used with compression loads!

**A10**


Eye



<sup>1</sup> max. force 10,000 N

**MA10**


Bearing Shoe

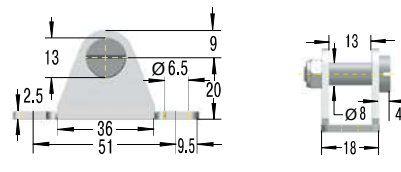

<sup>1</sup> max. force 1,800 N

**D10**


Clevis Fork  
DIN 71752



<sup>1</sup> max. force 10,000 N

**E10**


Swivel Eye  
DIN 648



<sup>1</sup> max. force 10,000 N

**E10**


Swivel Eye  
DIN 648



<sup>1</sup> max. force 10,000 N

**ME10**


Bearing Shoe

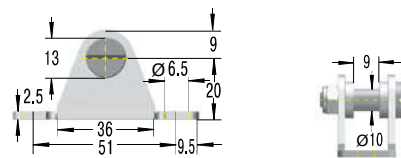

<sup>1</sup> max. force 1,800 N

**OE10**


Side Bracket with Ball

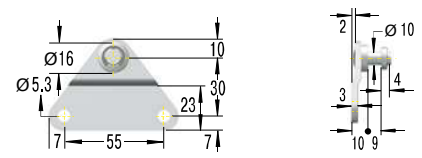

<sup>1</sup> max. force 1,200 N


**PE10**

Round Bracket with Ball

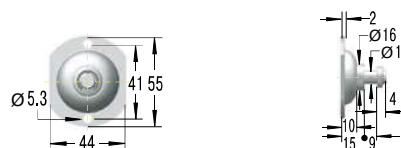


<sup>1</sup> max. force 1,200 N

**M14x1.5 (for GS-40, GST-40, GZ-40, HB-40, HBD-70)**
**C14**

 Angle Ball Joint  
 DIN 71802

<sup>1</sup> max. force 3,200 N

**F14**


Inline Ball Joint


<sup>1</sup> max. force 3,200 N

 Attention! Must only be used  
 with compression loads!



**A14**


Eye


<sup>1</sup> max. force 10,000 N

**ME14**



Bearing Shoe



<sup>1</sup> max. force 10,000 N

**D14**

 Clevis Fork  
 DIN 71752

<sup>1</sup> max. force 10,000 N

**ND14**



Mounting Flange


<sup>1</sup> max. force 10,000 N

**E14**

 Swivel Eye  
 DIN 648

<sup>1</sup> max. force 10,000 N


**ME14**

Bearing Shoe


<sup>1</sup> max. force 10,000 N

<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M24x2 (for GS-70, HB-70, HBD-85, HBS-70)**


**D24**  
Clevis Fork  
DIN 71752



<sup>1</sup> max. force 50,000 N




**ND24**  
Mounting Flange

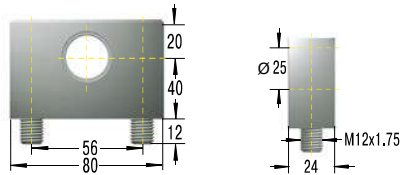

<sup>1</sup> max. force 50,000 N


**E24**  
Swivel Eye  
DIN 648



<sup>1</sup> max. force 50,000 N



**ME24**  
Bearing Shoe

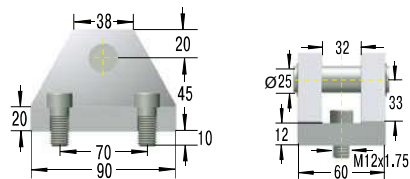

<sup>1</sup> max. force 50,000 N

<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

## Mounting Accessories

for gas springs and hydraulic dampers  
made of stainless steel


**For our gas springs and hydraulic dampers made of stainless steel we also offer a flexible product range of DIN standardised end fittings and mounting brackets. These eyes, swivel eyes, clevis forks, angle ball joints, ball sockets, inline ball joints and mounting brackets are also made of sturdy stainless steel and can be flexibly combined.**

The high-quality stainless steel accessories are rustproof and weakly magnetic. Just as with the corresponding stainless steel gas springs and hydraulic dampers, they are preferred in the food, electronics and ship building industries along with medical and cleanroom technology.

All ACE stainless steel gas springs and the appropriate mounting accessories are individually designed for each application with the ACE calculation program.

**The entire range of stainless steel accessories is also available separately.**


**Individual  
Combinations!**

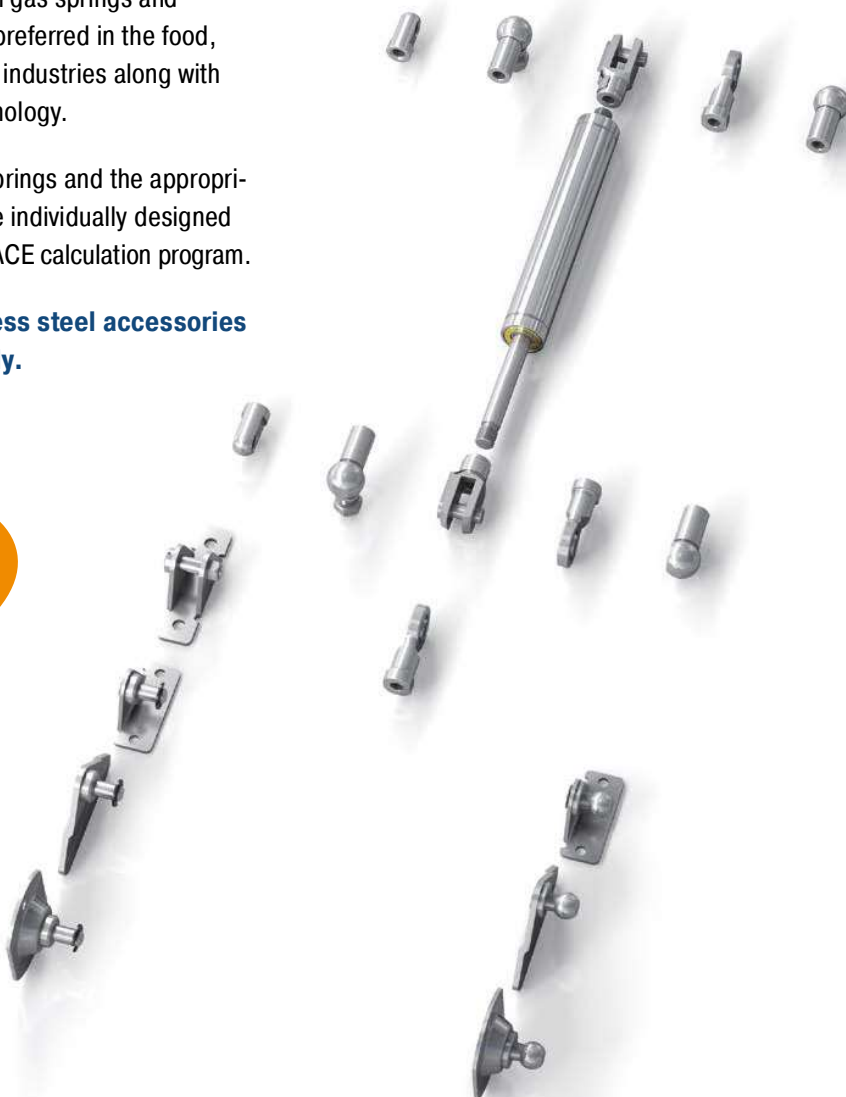

### M3.5x0.6


(for GS-8-V4A, GS-10-V4A, GS-12-V4A, GZ-15-V4A)

#### C3.5-V4A Angle Ball Joint



<sup>1</sup> max. force 370 N


#### A3.5-V4A Eye




<sup>1</sup> max. force 370 N




#### NA3.5-V4A Angle Bracket with Ball




<sup>1</sup> max. force 180 N




#### OA3.5-V4A Side Bracket with Ball



<sup>1</sup> max. force 180 N




#### D3.5-V4A Clevis Fork



<sup>1</sup> max. force 370 N




#### A3.5-V4A Eye



<sup>1</sup> max. force 370 N


#### G3.5-V4A Ball Socket




<sup>1</sup> max. force 370 N




#### NG3.5-V4A Angle Bracket with Ball




<sup>1</sup> max. force 180 N



















#### OG3.5-V4A Side Bracket with Ball



<sup>1</sup> max. force 180 N




**M5x0.8****(for GS-15-VA)****C5-VA**  
Angle Ball Joint<sup>1</sup> max. force 430 N**D5-VA**  
Clevis Fork<sup>1</sup> max. force 490 N**E5-VA**  
Swivel Eye<sup>1</sup> max. force 490 N**A5-VA**  
Eye<sup>1</sup> max. force 490 N**MA5-V4A**  
Bearing Shoe<sup>1</sup> max. force 500 N**NA5-V4A**  
Angle Bracket with Ball<sup>1</sup> max. force 400 N**OA5-V4A**  
Side Bracket with Ball<sup>1</sup> max. force 180 N**PA5-V4A**  
Round Bracket with Ball<sup>1</sup> max. force 500 N**G5-VA**  
Ball Socket<sup>1</sup> max. force 430 N**NG5-V4A**  
Angle Bracket with Ball<sup>1</sup> max. force 400 N**OG5-V4A**  
Side Bracket with Ball<sup>1</sup> max. force 180 N**PG5-V4A**  
Round Bracket with Ball<sup>1</sup> max. force 500 N<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.




**M8x1.25** (for GS-19-VA, GS-22-VA, GZ-19-VA)


**C8-VA**  
Angle Ball Joint




**D8-VA**  
Clevis Fork




**A8-VA**  
Eye




**MA8-V4A**  
Bearing Shoe




**NA8-V4A**  
Angle Bracket with Ball

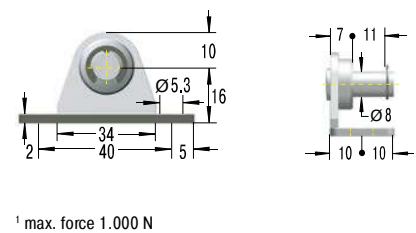


**OA8-V4A**  
Side Bracket with Ball

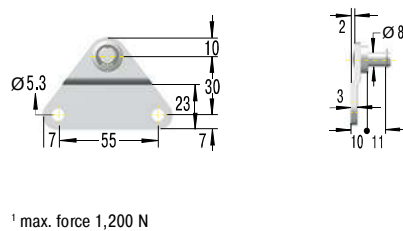


**PA8-V4A**  
Round Bracket with Ball

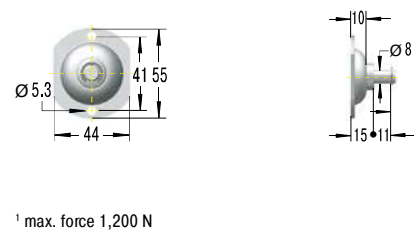


**E8-VA**  
Swivel Eye





**MA8-V4A**  
Bearing Shoe

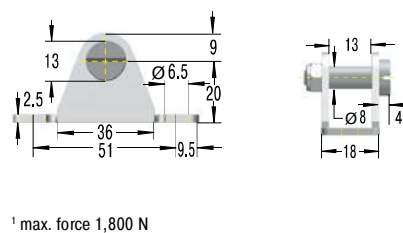



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.


**M8x1.25 (for GS-19-VA, GS-22-VA, GZ-19-VA)**
**G8-VA**  
 Ball Socket

<sup>1</sup> max. force 1,140 N


**NG8-V4A**  
 Angle Bracket with Ball
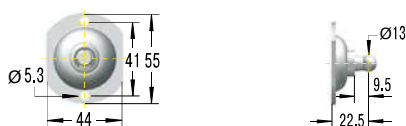
<sup>1</sup> max. force 1,000 N


**OG8-V4A**  
 Side Bracket with Ball

<sup>1</sup> max. force 1,200 N


**PG8-V4A**  
 Round Bracket with Ball

<sup>1</sup> max. force 1,200 N

**M10x1.5 (for GS-28-VA, GZ-28-VA)**
**C10-VA**  
 Angle Ball Joint

<sup>1</sup> max. force 1,750 N

**D10-VA**  
 Clevis Fork
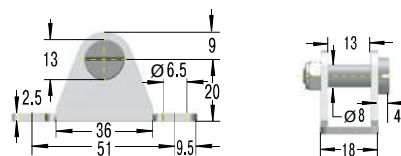
<sup>1</sup> max. force 3,800 N

**E10-VA**  
 Swivel Eye

<sup>1</sup> max. force 3,800 N


**A10-VA**  
 Eye

<sup>1</sup> max. force 3,800 N

**MA10-V4A**  
 Bearing Shoe

<sup>1</sup> max. force 1,800 N

<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.


## M14x1.5 (for GS-40-VA, GZ-40-VA)

### C14-VA Angle Ball Joint




<sup>1</sup> max. force 3,200 N

### A14-VA Eye




<sup>1</sup> max. force 7,000 N


### ME14-VA Bearing Shoe



<sup>1</sup> max. force 10,000 N




### D14-VA Clevis Fork




<sup>1</sup> max. force 7,000 N


### ND14-VA Mounting Flange



<sup>1</sup> max. force 10,000 N




### E14-VA Swivel Eye




<sup>1</sup> max. force 7,000 N

### ME14-VA Bearing Shoe



<sup>1</sup> max. force 10,000 N



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.